

NELUX ARCHITECTURAL LIGHTING PRODUCTS

LED LIGHT PROFILES 2025

WIP

NELUX (HK) INTERNATIONAL,LTD

Head office: 18, harbour road, central plaza, 32/F, office 3208, wanchai, hong kong, china

website: www.nelux.com.hk

email: sales@nelux.com.hk

wechat: neluxury

tel: +852 28600042

fax: *852 28600066

About Us

Nelux: Professional Lighting Solutions

At Nelux, we have been lighting up ideas and projects around the world for over 30 years. Since establishing our headquarters in Hong Kong in 2010, we have become a trusted partner in the design and supply of technical and decorative lighting solutions for hotels, restaurants, franchises, retail stores, museums, and other commercial spaces.

Our philosophy blends innovation, design, and functionality to deliver high-performance products that not only meet but exceed the expectations of our clients. We focus on two key areas:


A premium range of interior lighting with a 5-year warranty, perfect for projects requiring durability and aesthetic excellence.

A bespoke production service that allows for the creation of unique pieces tailored to the specific needs of each client and project.

Our global market expertise, combined with an unwavering commitment to quality and competitive pricing, positions us as a leader in lighting solutions for large-scale projects. This catalog is a testament to our dedication and passion for illuminating every space with creativity and precision.



Optical

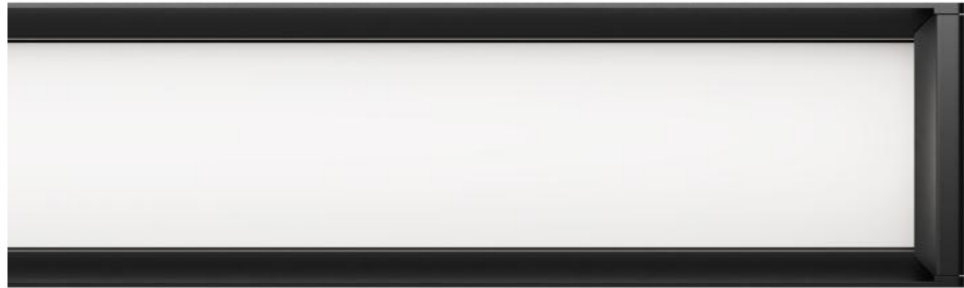

SMD linear lighting

Acrylic Diffuser cover



Prismatic linear lighting

Acrylic Prismatic cover




Honeycomb

Diffuser with honeycomb



COB linear spotlight

Anti-glare cup

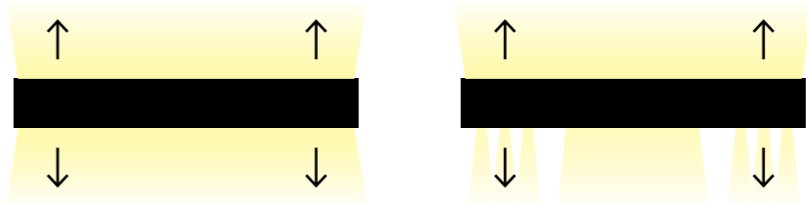

UP+DOWN:

UP and UP lighting

Control flexibility



On/Off
Control

DALIT8
Control

1-10V
dimmers

TRIAC
dimmers

DMX/RDM
Control

 DMXrdm



Common increase :

The multi-functional combination ensures that the light provides the final performance in many spaces; It can be matched with SMD, cellular network, cob, track and other accessory lighting systems, suitable for various lighting solutions.


A Track lighting can be added



B Double sided lighting
up and down





C SMD linear lighting



D Honeycomb



E COB linear spotlight--1/2



F COB linear spotlight)



G Rhombic filter linear spotlight




Intelligent induction



CCT setting

You can set the color temperature with a simple gesture. From 3000K warm tone to 6000K cold tone.

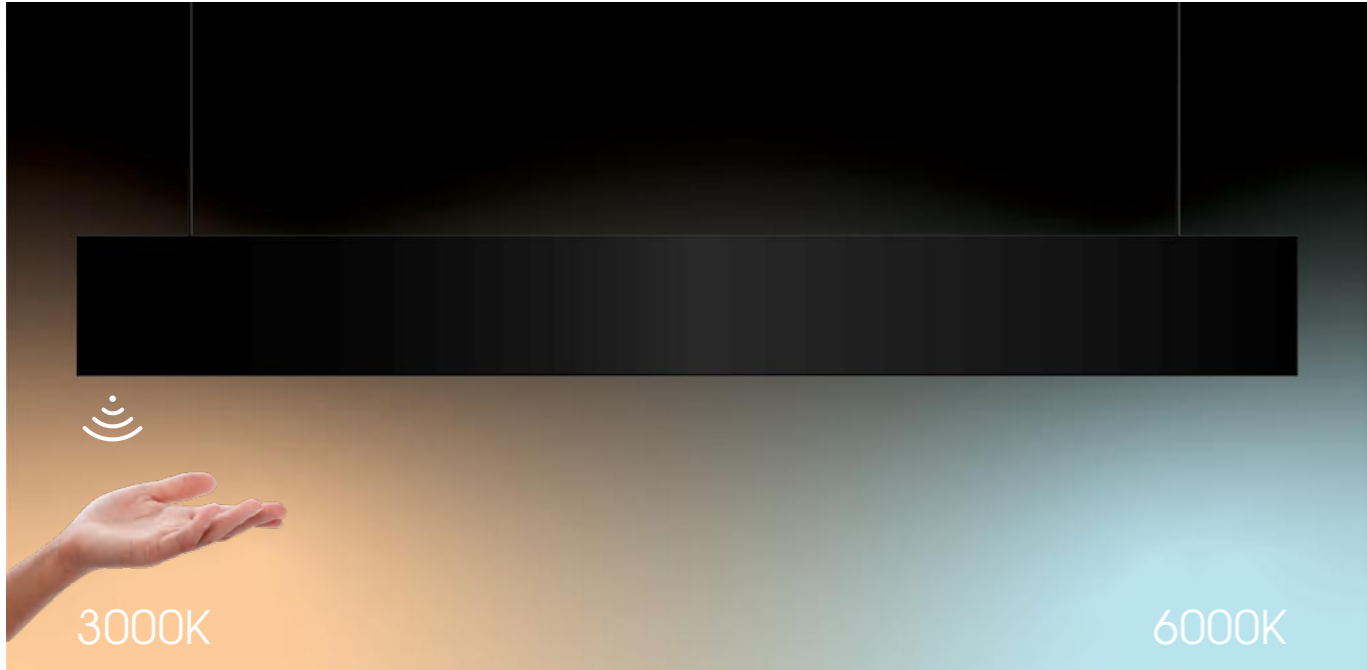

Dimmable 5%-100%

You can set the color temperature with a simple gesture. From 3000K warm tone to 6000K cold tone.



Light sensing dimmable

It provides double-sided light output through its two LED rings, and the upper and lower lights can operate independently of each other.





Icons

CE CE type certified products

 Color adjusting


CRI
>90 High color rendering index

 Pendant direct

 Recessed trim-mounting

 Ceiling-mounted


 Indoor application

 brightness
Dimmable 5%~100%

IP20 Protection level

 Aluminum side pass


 Wall-mounting

 Floor-mounted

 Anti glare


 Microwave induction


100V 100V~240V
240V Input voltage

 Recessed immersible-mounting


 Floor-mounted


 Table-mounted

 High visual comfort

 Light sensing dimming

DIMM Dimming 0-10V

 Recessed trimless-mounting


 Semi recessed-mounting

300mm
to
3000mm Size adjustable

 Gesture dimming

DALI DALI dimmable driver

3000k
24G
6000K Color temperature adjustable


 Hand scanning induction

 Delay light off


3000k
24G
4000K Color temperature adjustable

 Adjustable suspension wire

 Multiple splices


 Real sunshine experience

 Reduced Rayleigh scattering

 **3060**
Standard specifications

Product index


Installation

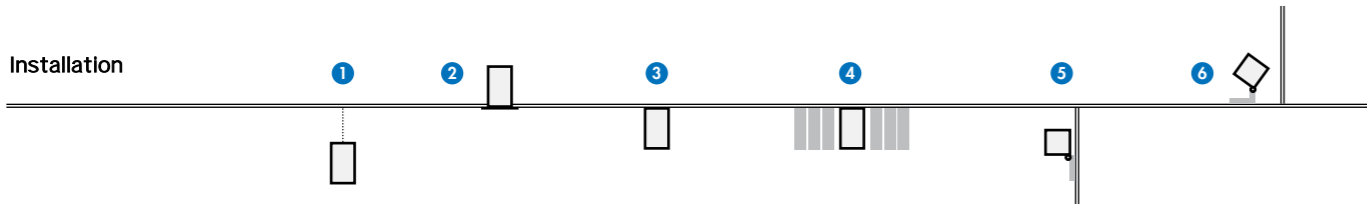


Page
P065-072

SUSPENSION


WIP

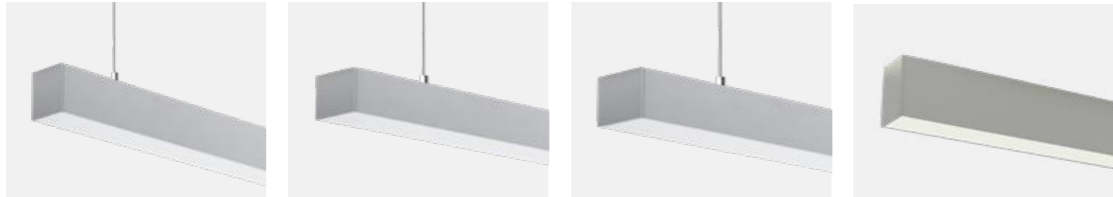


KD517-A P. 67 **KD617-A** P. 67 **KD917-A** P. 67 **KD857S-A** P. 67

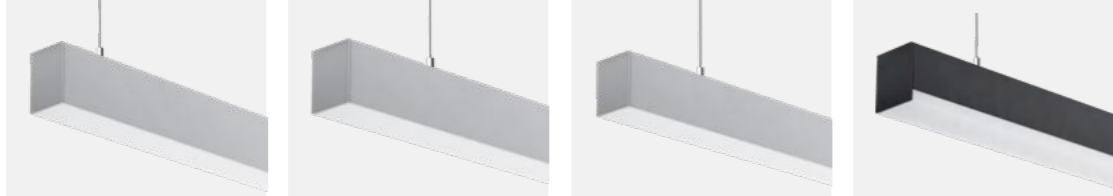


KD3570-A P. 68 **KD5573-A** P. 68 **KD7572-A** P. 68 **KD905-A** P. 70

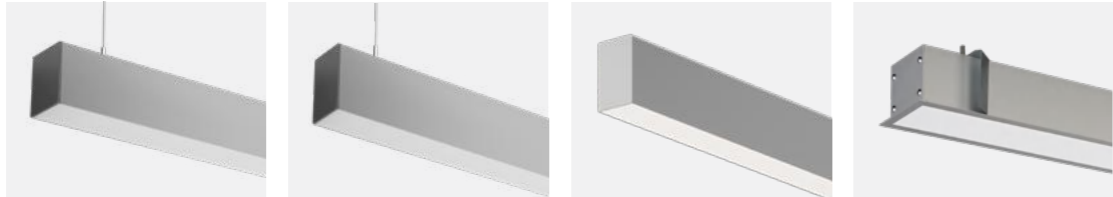



KD908S-A P. 70 **KD902S-A** P. 70 **KD907-A** P. 70 **KD909-A** P. 71

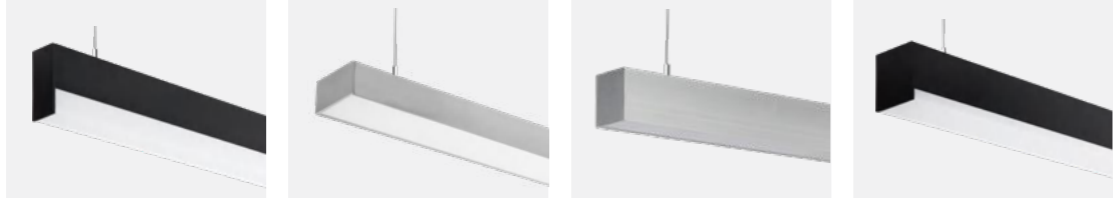

KD916-A P. 71 **KD811-A** P. 71 **KD878-A** P. 71 **KD919-A** P. 72

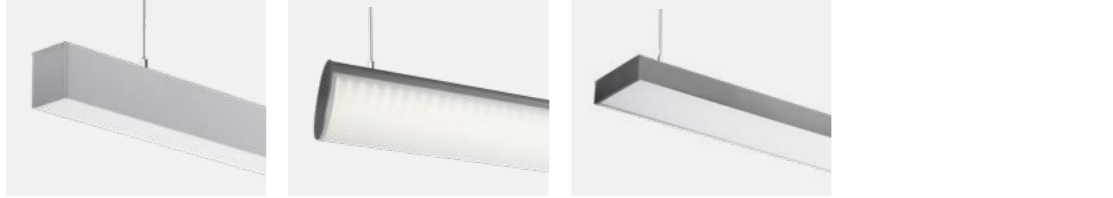

KD201-A P. 72 **KD688** P. 72 **KD668-A** P. 72

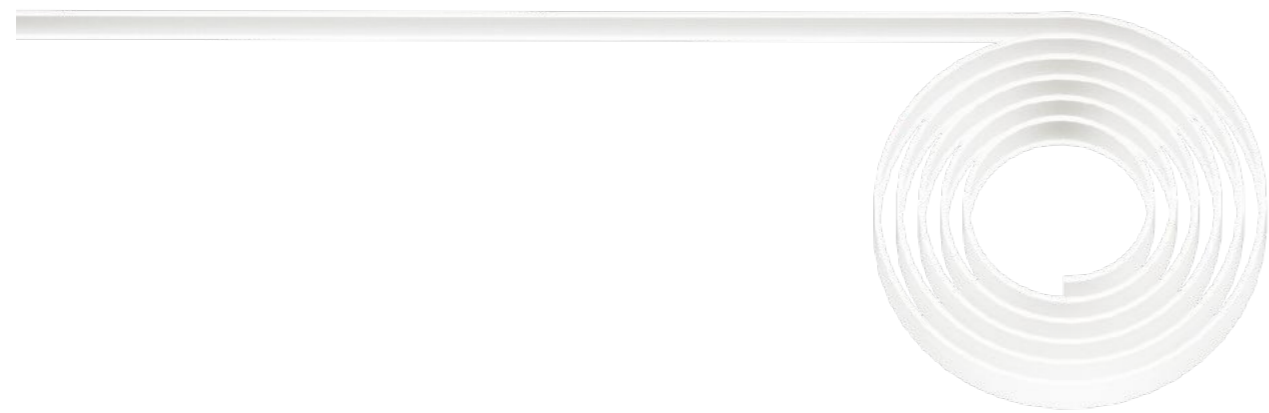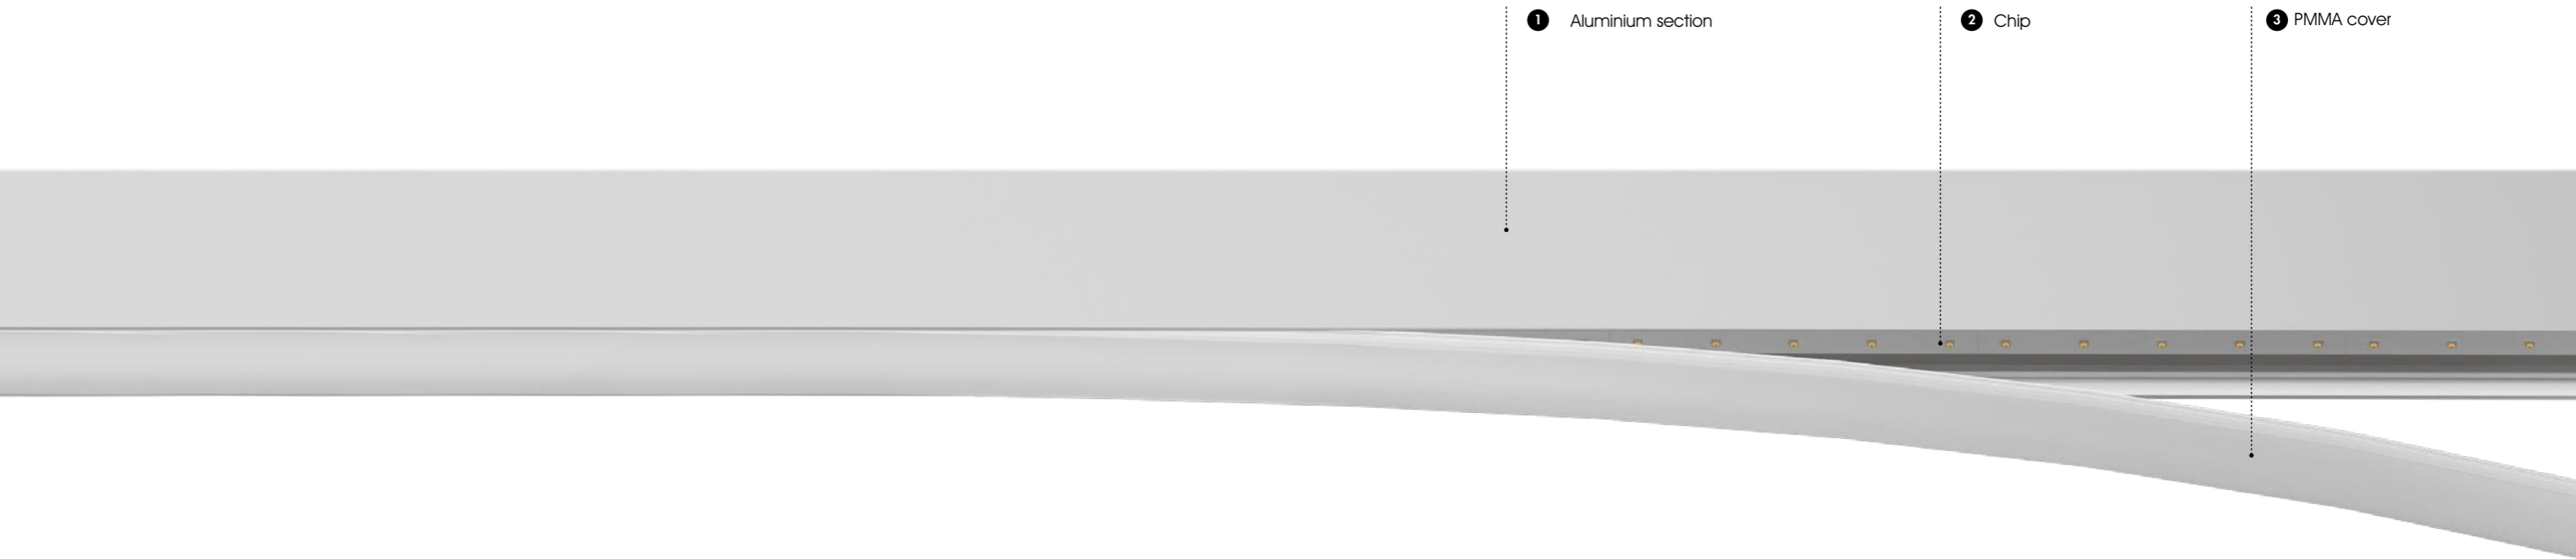

1

Aluminium section

It adopts high-quality aluminum alloy profile lamp body and screw free die-casting aluminum end cover, which is convenient and flexible for installation and maintenance.

2

Aluminum substratON

Acrylic cover plate can be extended infinitely, and the longest mask can be used for 20 meters.

3

PMMA cover

PMMA can be extended infinitely, and the longest mask can be used for 20 meters.

Information



Colour: ● Sand black 砂黑 ● Sand white 砂白 ● Wood grain 木纹
 颜色: ● Matte black 哑黑 ○ Matte white 哑白 ● Silver 银色



KD517-A ▲

Power	Flux	Size(LxWxH)	CCT	Beam Angle	Added	
25W/M	80-95 lm/W	Lx35x34mm	3000K 4000K 6000K	110°	/	

KD617-A ▲

Power	Flux	Size(LxWxH)	CCT	Beam Angle	Added	
25W/M	80-95 lm/W	Lx55x34mm	3000K 4000K 6000K	110°	/	

KD917-A ▲

Power	Flux	Size(LxWxH)	CCT	Beam Angle	Added	
25W/M	80-95 lm/W	Lx75x34mm	3000K 4000K 6000K	110°	/	


KD857S-A ▲

Power	Flux	Size(LxWxH)	CCT	Beam Angle	Added	
25W/M	80-95 lm/W	Lx50x70mm	3000K 4000K 6000K	110°	/	

Information



Color: ● Sand black ● Sand white ● Wood grain
 ● Matte black ○ Matte white ● Silver



KD3570-A ▲

Power	Flux	Size(LxWxH)	CCT	Beam Angle	Added	
25W/M	80-95 lm/W	Lx35x69mm	3000K 4000K 6000K	110°	/	

KD5573-A ▲

Power	Flux	Size(LxWxH)	CCT	Beam Angle	Added	
25W/M	80-95 lm/W	Lx55x73.5mm	3000K 4000K 6000K	110°	/	

KD7572-A ▲

Power	Flux	Size(LxWxH)	CCT	Beam Angle	Added	
25W/M	80-95 lm/W	Lx75x72mm	3000K 4000K 6000K	110°	/	




Information



Color: ● Sand black ● Sand white ● Wood grain
 ● Matte black ● Matte white ● Silver


KD905-A ▲

Power	Flux	Size(LxWxH)	CCT	Beam Angle	Added
25W/M	80-95 lm/W	Lx58x68mm	3000K 4000K 6000K	110°	/

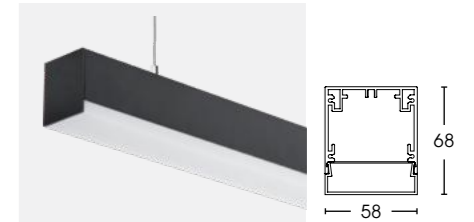


KD908S-A ▲

Power	Flux	Size(LxWxH)	CCT	Beam Angle	Added
25W/M	80-95 lm/W	Lx80x85mm	3000K 4000K 6000K	110°	/

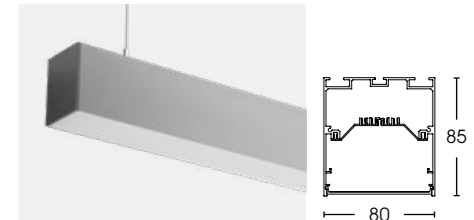


KD902S-A ▲▲

Power	Flux	Size(LxWxH)	CCT	Beam Angle	Added
上15W/M 下25W/M	80-95 lm/W	Lx80x102mm	3000K 4000K 6000K	110°	/

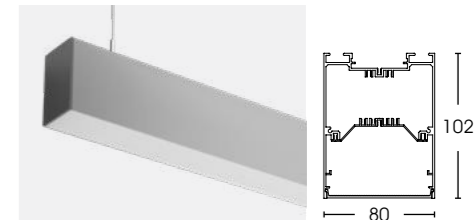

KD907-A ▲▲

Power	Flux	Size(LxWxH)	CCT	Beam Angle	Added
上15W/M 下25W/M	80-95 lm/W	Lx80x102mm	3000K 4000K 6000K	110°	/

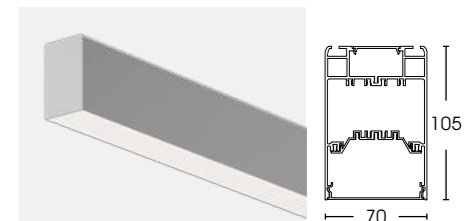

Information



Color: ● Sand black ● Sand white ● Wood grain
 ● Matte black ○ Matte white ○ Silver

KD909-A ▲

Power	Flux	Size(LxWxH)	CCT	Beam Angle	Added	
25W/M	80-95 lm/W	Lx100x80mm	3000K 4000K 6000K	110°	/	

KD916-A ▲▲

Power	Flux	Size(LxWxH)	CCT	Beam Angle	Added	
上15W/M 下25W/M	80-95 lm/W	Lx43x102mm	3000K 4000K 6000K	110°	/	

KD811-A ▲

Power	Flux	Size(LxWxH)	CCT	Beam Angle	Added	
25W/M	80-95 lm/W	Lx110x80mm	3000K 4000K 6000K	110°	/	

KD878-A ▲

Power	Flux	Size(LxWxH)	CCT	Beam Angle	Added	
25W/M	80-95 lm/W	Lx70x80mm	3000K 4000K 6000K	110°	/	

Information



Color: ● Sand black ● Sand white ● Wood
 ● Matte black ○ Matte white ○ grain Silver

KD919-A ▲

Power	Flux	Size(LxWxH)	CCT	Beam Angle	Added	
25W/M	80-95 lm/W	Lx95x106mm	3000K 4000K 6000K	110°	/	

KD201-A ▲

Power	Flux	Size(LxWxH)	CCT	Beam Angle	Added	
25W/M	80-95 lm/W	Lx50x50mm	3000K 4000K 6000K	110°	/	

KD688 ▲

Power	Flux	Size(LxWxH)	CCT	Beam Angle	Added	
25W/M	80-95 lm/W	Lx100x100mm	3000K 4000K 6000K	110°	/	

KD668-A ▲

Power	Flux	Size(LxWxH)	CCT	Beam Angle	Added	
50W	3900 lm	1180x180x72mm	3000K 4000K 6000K	110°	/	
60W	4700 lm	1180x200x72mm				
80W	6200 lm	1180x260x72mm				

面罩可直接下拉扣装
 最大可定制 1200x2400mm

www.nelux.com.hk

sales@nelux.com.hk
salesnelux@gmail.com

neluxclients@gmail.com