

# nelux

Producing your dreams

Comercial & Architectural LED lighting  
Since 2010

Nelux Architectural Lighting Products

## SMD DOWN LIGHT

Scan Our QR



Producing Your Dreams

### Nelux (HK) Internation,ltd

nelux architectural lighting

18 Harbour road, Central Plaza, 32/F, Office 3208,  
Wanchai, HK, China  
sales@nelux.com.hk  
+852 53490724

neluxury  
neluxlighting  
www.nelux.com.hk


Welcome to Nelux



# nelux

**Producing your dreams**

Comercial & Architectural LED lighting  
Since 2010

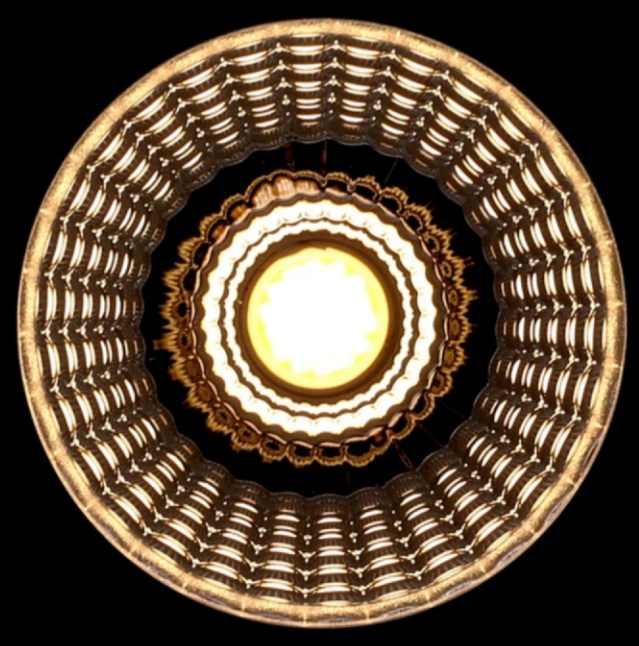

## NELUX (HK) INTERNATIONAL,LTD



### NELUX ARCHITECTURAL LIGHTING architectural lighting products

## Nelux: Illuminating Excellence for Over Three Decades

With over 32 years of combined experience, Nelux has been at the forefront of the lighting industry, specializing in fixtures for diverse lighting projects. Our journey began with the same enthusiasm and dedication that drives us today. We aim to leverage our extensive expertise to contribute meaningfully to the knowledge and development of lighting solutions, catering specifically to lighting designers, architects, interior designers, and decorators.

Since the establishment of our head office in Hong Kong in 2010, Nelux has developed three primary product lines:

1. **Architectural Lighting Products:** Products to enhance the aesthetic and functional aspects of architectural spaces.
2. **Industrial Lighting:** High quality and Engineered to meet the rigorous demands of industrial environments.
3. **Bespoke Lighting Products:** Custom-designed lighting solutions that include mold management, product design, and the manufacturing of special and unique products in direct collaboration with our suppliers and customers.

## Our Expertise

At Nelux, we excel in professional mold product management and oversee the entire production process, specializing in die casting parts, CNC precision machining parts, and custom fabrication parts. Our commitment to quality is unwavering; we conduct thorough inspections and quality control throughout the entire production process.

## Our Strength

Our professional team, combined with the most advanced knowledge in lighting, empowers us to provide high-quality products with exceptional precision. We pride ourselves on our ability to deliver the best solutions tailored to your needs.

## Custom Solutions

We offer competitive quotes based on your drawings (preferred formats: STEP, DWG, and PDF) within 49 hours. Our goal is to provide you with unparalleled service and products that meet your exact specifications.





SMD Down Light



NR3036 15W



NR3037 25W/35W



NR3061 5W/10W



NR3002 5W/7W



NR3004 15W



NR3006 15W/25W



NR3008 35W/43W



NR3027 10W



NR3028 15W



NR3029 30W



NR3030 45W



NR3081 6W/9W/12W




NR3082 15W/20W/25W



NR3083 25W/30W/35W

SMD downlight series with flood beam angle, high light efficiency.  
 Light body made from original aluminum, RoHs Reach standard.  
 Uniform light performance due to control LEDs in CRI and SDCM.








**NR3036**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
15W	3000K 4000K 6500K	EVERLIGHT	≥80	100°	1307.2lm

Size/CTN: 365×365×185 mm  
G.W./CTN: 4.2 kgs  
PCS/CTN: 8 pcs

Light distribution parameters

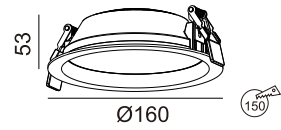
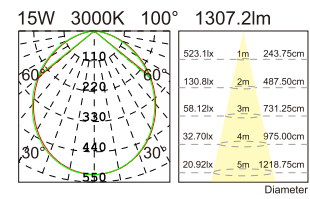


**NR3061**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
5W	2700K	SMD	≥80	100°	440.3lm
10W	3000K			100°	798.8lm
	4000K				
	5000K				

Size/CTN: 615×250×270 mm  
G.W./CTN: 7.02 kgs  
PCS/CTN: 30 pcs

Light distribution parameters


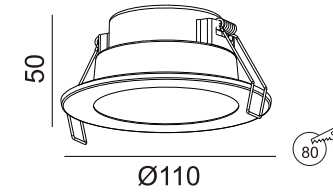
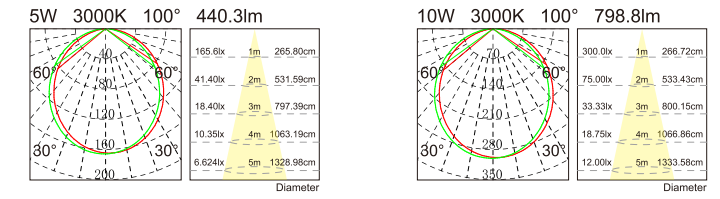


**NR3037**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
25W	3000K	EVERLIGHT	≥80	100°	2396.8lm
35W	4000K			100°	3067.1lm
	6500K				

Size/CTN: 462×462×240 mm  
G.W./CTN: 6.5 kgs  
PCS/CTN: 8 pcs

Light distribution parameters

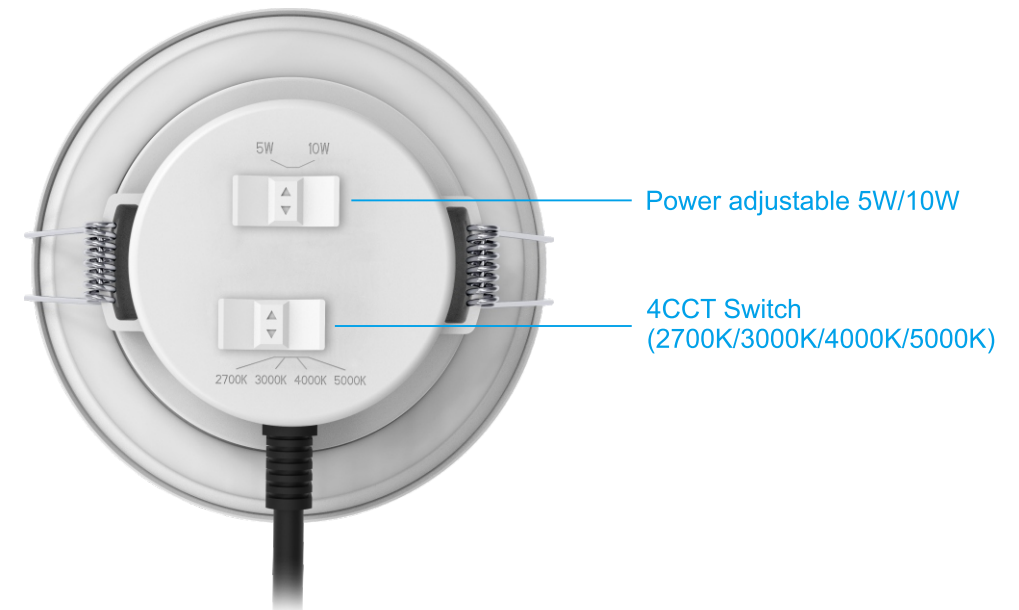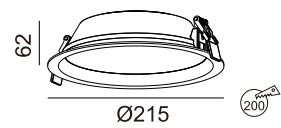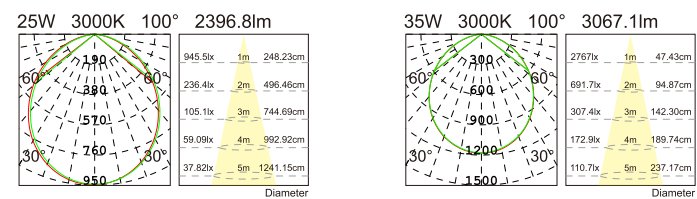






**NR3002**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
5W	3000K	EVERLIGHT	≥80	95°	303.4lm
7W	4000K			95°	425.9lm
	5000K				
	6500K				

Size/CTN: 540×210×185 mm  
G.W./CTN: 6.23 kgs  
PCS/CTN: 20 pcs

Light distribution parameters

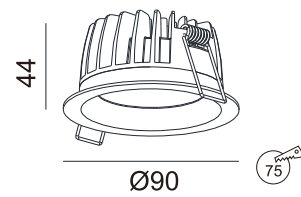
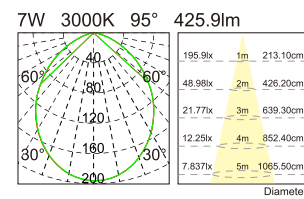
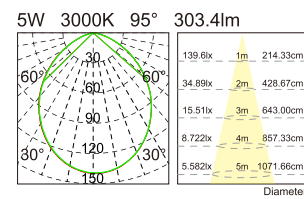


**NR3006**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
15W	3000K	EVERLIGHT	≥80	100°	1214.0lm
25W	4000K			100°	1869.0lm
	5000K				
	6500K				

Size/CTN: 540×360×330 mm  
G.W./CTN: 14.53 kgs  
PCS/CTN: 18 pcs

Light distribution parameters

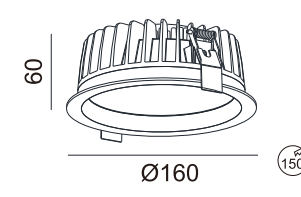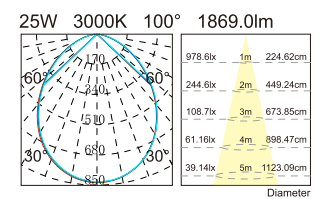
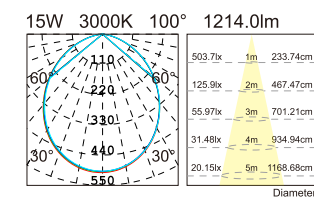


**NR3004**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
15W	3000K	EVERLIGHT	≥80	90°	1295.7lm
	4000K				
	5000K				
	6500K				

Size/CTN: 405×405×300 mm  
G.W./CTN: 11.6 kgs  
PCS/CTN: 27 pcs

Light distribution parameters


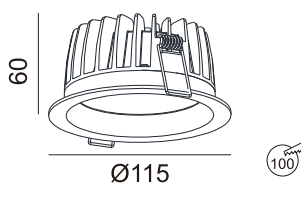
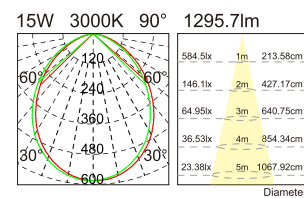


**NR3008**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
35W	3000K	EVERLIGHT	≥80	105°	3388.3lm
43W	4000K			100°	4364.6lm
	5000K				
	6500K				

Size/CTN: 462×462×240 mm  
G.W./CTN: 12 kgs  
PCS/CTN: 8 pcs

Light distribution parameters

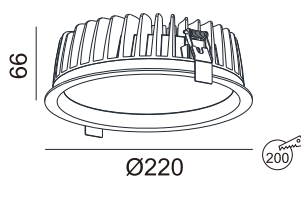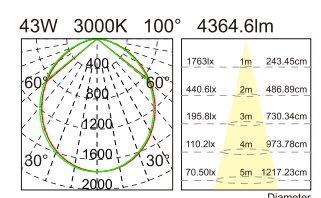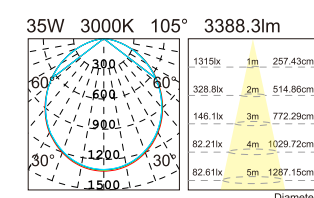





**NR3027**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
10W	3000K 4000K 5000K 6500K	EVERLIGHT	≥80	70°	762.8lm

Size/CTN: 420×390×275 mm  
G.W./CTN: 5.35 kgs  
PCS/CTN: 18 pcs

Light distribution parameters

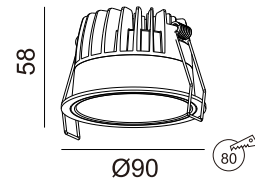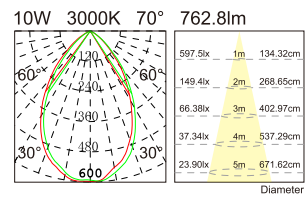

Optional Reflector





**NR3028**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
15W	3000K 4000K 5000K 6500K	EVERLIGHT	≥80	70°	1301.9lm

Size/CTN: 435×435×275 mm  
G.W./CTN: 7.45 kgs  
PCS/CTN: 18 pcs

Light distribution parameters

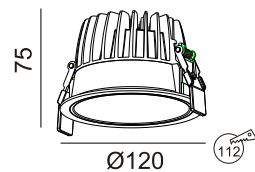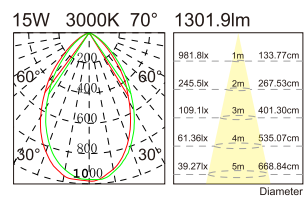

Optional Reflector





**NR3029**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
30W	3000K 4000K 5000K 6500K	EVERLIGHT	≥80	85°	2520.7lm

Size/CTN: 395×395×465 mm  
G.W./CTN: 7.67 kgs  
PCS/CTN: 12 pcs

Light distribution parameters

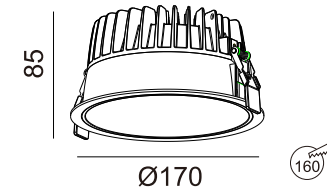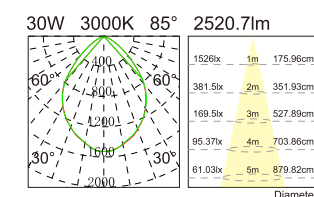

Optional Reflector





**NR3030**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
45W	3000K 4000K 5000K 6500K	EVERLIGHT	≥80	80°	4001.7lm

Size/CTN: 520×500×510 mm  
G.W./CTN: 12.13 kgs  
PCS/CTN: 12 pcs

Light distribution parameters

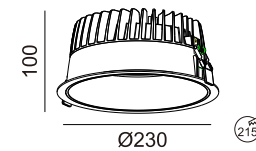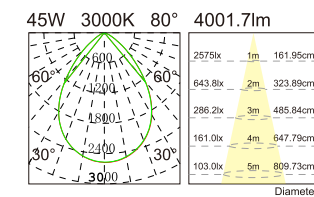

Optional Reflector:









**NR3081**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
6W	2700K	SMD	≥80	100°	673.9lm
9W	3000K			100°	926.3lm
12W	4000K 6500K			100°	1102.2lm

Size/CTN: 480×360×280 mm  
G.W./CTN: 7.2 kgs mm  
PCS/CTN: 48 pcs

Light distribution parameters

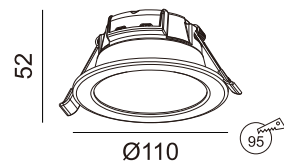
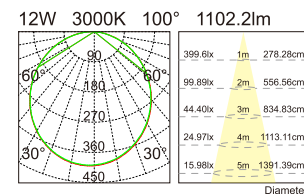
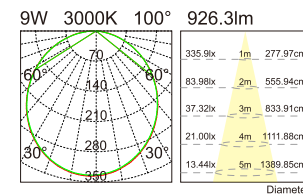
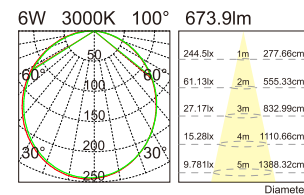


**NR3082**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
15W	2700K	SMD	≥80	100°	1813.6lm
20W	3000K			100°	2261.2lm
25W	4000K 6500K			100°	2652.8lm

Size/CTN: 515×345×300 mm  
G.W./CTN: 6.5 kgs mm  
PCS/CTN: 24 pcs

Light distribution parameters

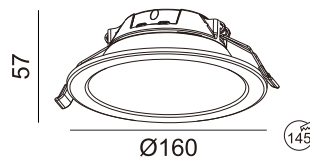
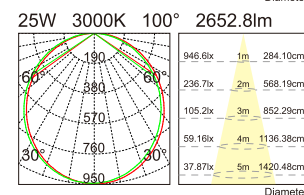
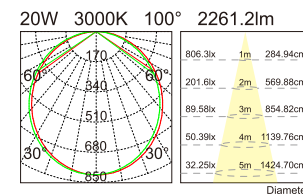
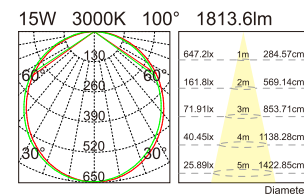


**NR3083**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
25W	2700K	SMD	≥80	100°	2961.3lm
30W	3000K			100°	3387.5lm
35W	4000K 6500K			100°	3700.6lm


Size/CTN: 455×455×345 mm  
G.W./CTN: 8.4 kgs mm  
PCS/CTN: 20 pcs

Light distribution parameters

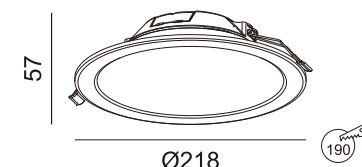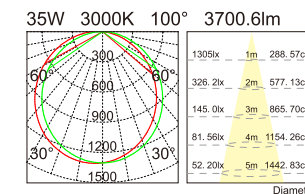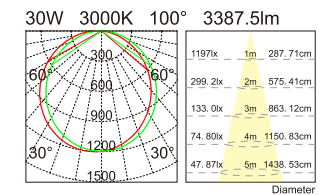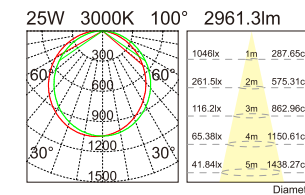

4CCT Switch  
(2700K/3000K/4000K/6500K)

3 Power Selection

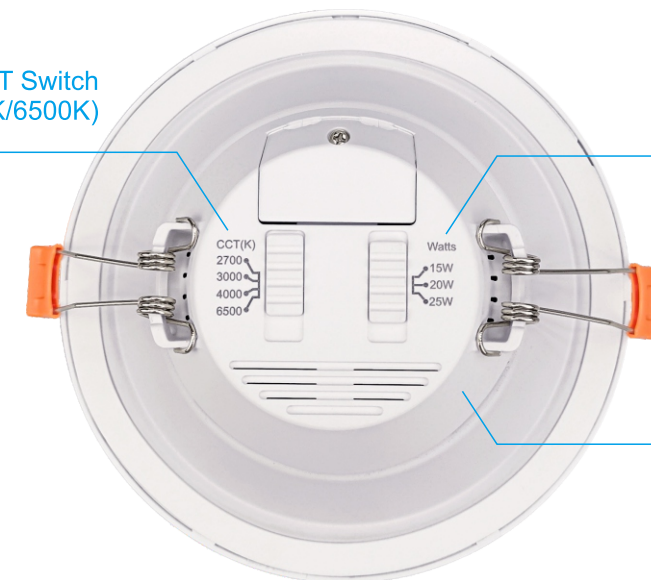

Driver Built-in