



OUTDOOR PROJECTORS LIGHT series

Ip65 outdoor floor-insert or open - mounted projector lamps, Its application is quite flexible. Widely used in gardens, meadows, trees, residential environments or commercial streets And so on.



- Modern & Fashion appearance, suitable for different scenes.
- Combine optics and practicality to create your personalized lighting scheme.



Adjustability

- Plug-in and surface mounted mounting methods
- Different front box selection
- Suitable for a variety of scenarios



cover -A

cover -B



4581R





Light Source: OSRAM LED
Material: Aluminum
OPTIC: 7°/15°/20°/30°

Luminous flux: 180 lm
Power: 3W
Mains voltage: 220-240V

CRI: Ra > 90
Output voltage: 3V
Description: ADJUSTABLE

CCT: 2700K/3000K/4000K/5000K
Output current: 700mA
Cutout: /

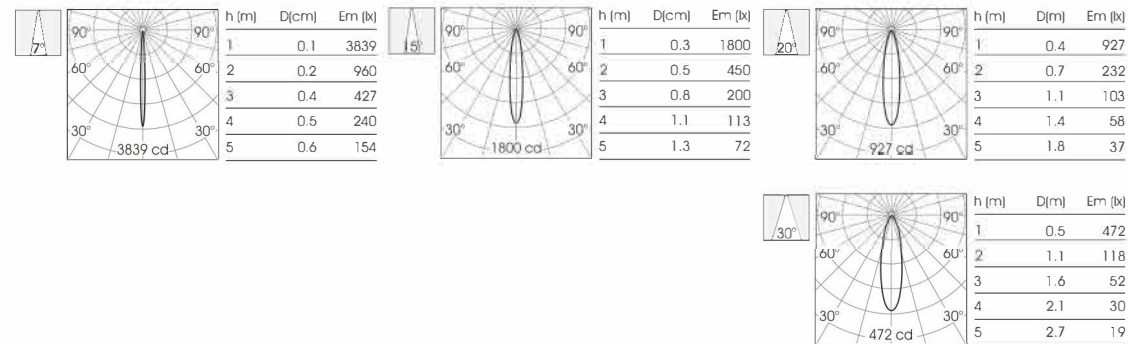

4265R





Light Source: CREE COB
Material: Aluminum
OPTIC: 20°/30°



Luminous flux: 700 lm
Power: 9W
Mains voltage: 220-240V

CRI: Ra > 90
Output voltage: 36V
Description: ADJUSTABLE

CCT: 2700K/3000K/4000K/5000K
Output current: 200mA
Cutout: /

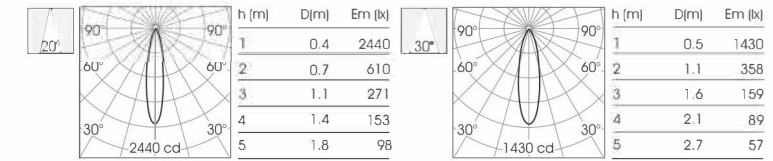

581S





Light Source: OSRAM LED
Material: Aluminum
OPTIC: 7°/15°/20°/30°



Luminous flux: 180 lm
Power: 3W
Mains voltage: 220-240V

CRI: Ra > 90
Output voltage: 3V
Description: ADJUSTABLE

CCT: 2700K/3000K/4000K/5000K
Output current: 700mA
Cutout: /

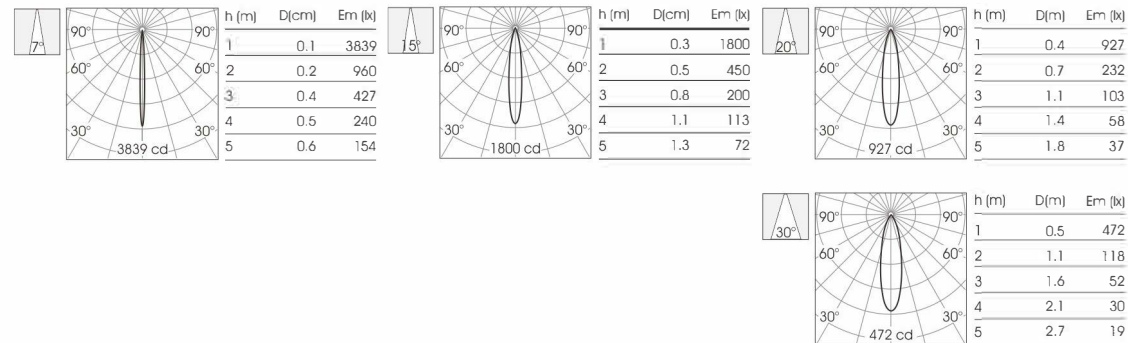

4280R





Light Source: CREE COB
Material: Aluminum
OPTIC: 15°/20°/30°

Luminous flux: 1100 lm
Power: 12W
Mains voltage: 220-240V

CRI: Ra > 90
Output voltage: 36V
Description: ADJUSTABLE

CCT: 2700K/3000K/4000K/5000K
Output current: 300mA
Cutout: /

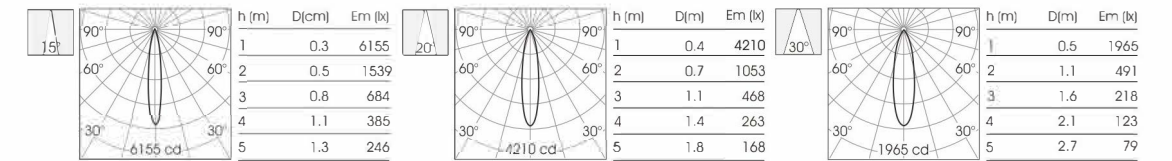

ACCESSORIES



Honeycomb Floor plug cover -A cover -B

WATERPROOF BOX



OWB711 OWB712 OWB713-3 OWB713-4

4295R




 High CRI
 ADJUSTABLE
 IP65



Light Source: CREE COB
Luminous flux: 1800 lm
CRI: Ra > 90
CCT: 2700K/3000K/4000K/5000K




Material: Aluminum
Power: 20W
Output voltage: 36V
Output current: 500mA

OPTIC: 15°/20°/30°
Mains voltage: 220-240V
Description: ADJUSTABLE
Cutout: /

Beam Angle	h (m)	D (cm)	Em (lx)	Beam Angle	h (m)	D (m)	Em (lx)	Beam Angle	h (m)	D (m)	Em (lx)
15°	1	0.3	15590	20°	1	0.4	9910	30°	1	0.5	3195
	2	0.5	3898		2	0.7	2478		2	1.1	799
	3	0.8	1732		3	1.1	1101		3	1.6	355
	4	1.1	974		4	1.4	619		4	2.1	200
	5	1.3	624		5	1.8	396		5	2.7	128

4380R

 High CRI
 ADJUSTABLE
 IP65

Light Source: CREE COB
Luminous flux: 1100 lm
CRI: Ra > 90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminum
Power: 12W
Output voltage: 36V
Output current: 300mA

OPTIC: 15°/20°/30°
Mains voltage: 220-240V
Description: ADJUSTABLE
Cutout: /

Beam Angle	h (m)	D (cm)	Em (lx)	Beam Angle	h (m)	D (m)	Em (lx)	Beam Angle	h (m)	D (m)	Em (lx)
15°	1	0.3	6155	20°	1	0.4	4210	30°	1	0.5	1965
	2	0.5	1539		2	0.7	1053		2	1.1	491
	3	0.8	684		3	1.1	468		3	1.6	218
	4	1.1	385		4	1.4	263		4	2.1	123
	5	1.3	246		5	1.8	168		5	2.7	79

4365R




 High CRI
 ADJUSTABLE
 IP65

Light Source: CREE COB
Luminous flux: 700 lm
CRI: Ra > 90
CCT: 2700K/3000K/4000K/5000K



Material: Aluminum
Power: 9W
Output voltage: 36V
Output current: 200mA

OPTIC: 20°/30°
Mains voltage: 220-240V
Description: ADJUSTABLE
Cutout: /

Beam Angle	h (m)	D (m)	Em (lx)	Beam Angle	h (m)	D (m)	Em (lx)
20°	1	0.4	2440	30°	1	0.5	1430
	2	0.7	610		2	1.1	358
	3	1.1	271		3	1.6	159
	4	1.4	153		4	2.1	89
	5	1.8	98		5	2.7	57

4395R




 High CRI
 ADJUSTABLE
 IP65

Light Source: CREE COB
Luminous flux: 1800 lm
CRI: Ra > 90
CCT: 2700K/3000K/4000K/5000K

Material: Aluminum
Power: 20W
Output voltage: 36V
Output current: 500mA

OPTIC: 15°/20°/30°
Mains voltage: 220-240V
Description: ADJUSTABLE
Cutout: /

Beam Angle	h (m)	D (cm)	Em (lx)	Beam Angle	h (m)	D (m)	Em (lx)	Beam Angle	h (m)	D (m)	Em (lx)
15°	1	0.3	15590	20°	1	0.4	9910	30°	1	0.5	3195
	2	0.5	3898		2	0.7	2478		2	1.1	799
	3	0.8	1732		3	1.1	1101		3	1.6	355
	4	1.1	974		4	1.4	619		4	2.1	200
	5	1.3	624		5	1.8	396		5	2.7	128

ACCESSORIES



Honeycomb Floor plug cover -A cover -B

WATERPROOF BOX



OWB711 OWB712 OWB713-3 OWB713-4