

# nelux

Producing your dreams

Comercial & Architectural LED lighting  
Since 2010

Nelux Architectural Lighting Products

Scan Our QR



Producing Your Dreams

## Nelux (HK) Internation,ltd

nelux architectural lighting

18 Harbour road, Central Plaza, 32/F, Office 3208,  
Wanchai, HK, China  
sales@nelux.com.hk  
+852 53490724

neluxury  
neluxlighting  
www.nelux.com.hk



## NELUX (HK) INTERNATIONAL,LTD



### NELUX ARCHITECTURAL LIGHTING architectural lighting products

## Nelux: Illuminating Excellence for Over Three Decades

With over 32 years of combined experience, Nelux has been at the forefront of the lighting industry, specializing in fixtures for diverse lighting projects. Our journey began with the same enthusiasm and dedication that drives us today. We aim to leverage our extensive expertise to contribute meaningfully to the knowledge and development of lighting solutions, catering specifically to lighting designers, architects, interior designers, and decorators.

Since the establishment of our head office in Hong Kong in 2010, Nelux has developed three primary product lines:

1. **Architectural Lighting Products:** Products to enhance the aesthetic and functional aspects of architectural spaces.
2. **Industrial Lighting:** High quality and Engineered to meet the rigorous demands of industrial environments.
3. **Bespoke Lighting Products:** Custom-designed lighting solutions that include mold management, product design, and the manufacturing of special and unique products in direct collaboration with our suppliers and customers.

## Our Expertise

At Nelux, we excel in professional mold product management and oversee the entire production process, specializing in die casting parts, CNC precision machining parts, and custom fabrication parts. Our commitment to quality is unwavering; we conduct thorough inspections and quality control throughout the entire production process.


## Our Strength

Our professional team, combined with the most advanced knowledge in lighting, empowers us to provide high-quality products with exceptional precision. We pride ourselves on our ability to deliver the best solutions tailored to your needs.

## Custom Solutions

We offer competitive quotes based on your drawings (preferred formats: STEP, DWG, and PDF) within 49 hours. Our goal is to provide you with unparalleled service and products that meet your exact specifications.



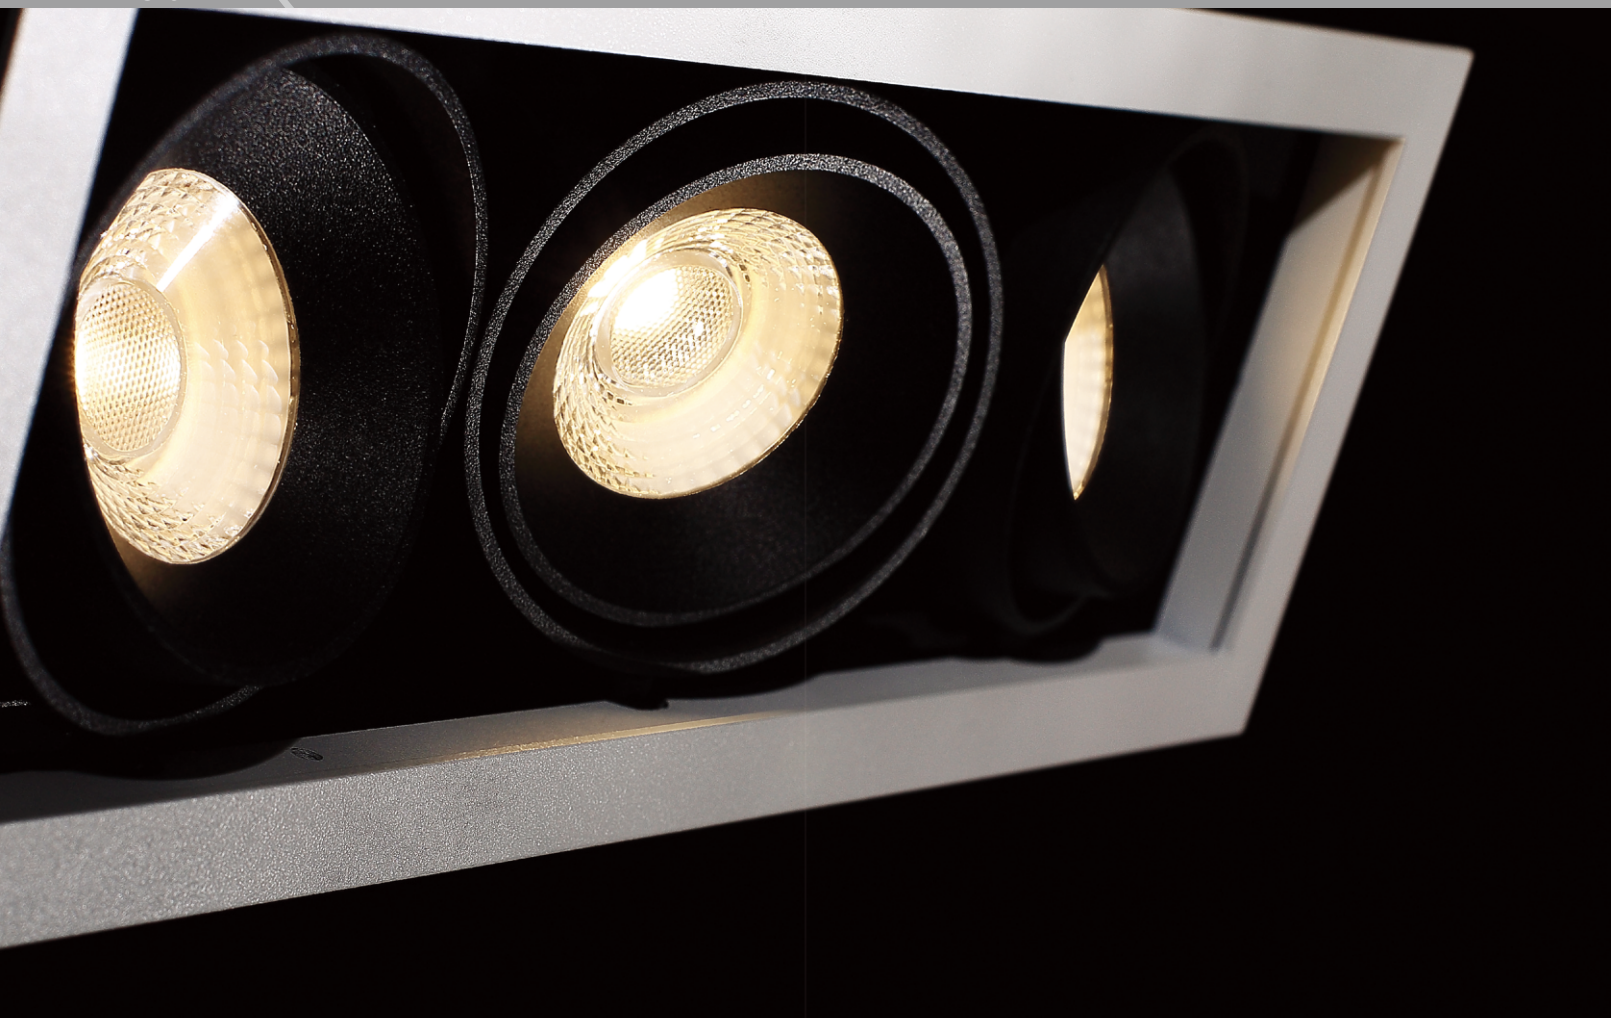

### CARDI Grilled Down Light

Iron frame and shell, die casting aluminum cross rings and LED module part.  
 360° tiltable with cross rings design, flexible to control the light direction.  
 Including 1 head, 2 heads, 3 heads. Rim and Trimless for different choice.




Diffuser options:



Lens  
10W



Reflector  
10W/15W/18W

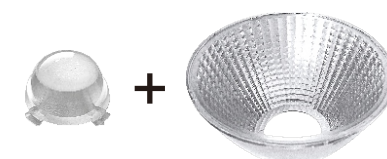

Lens + Reflector  
25W/30W/43W







**NR1051**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
10W	2700K	CREE COB	≥80	24°	851.9lm
15W	3000K			36°	842.3lm
	4000K			60°	792.7lm
	5000K			24°	1414.4lm
				36°	1396.8lm
				60°	1315.5lm

Size/CTN: 435×435×275 mm  
G.W./CTN: 10.38 kgs  
PCS/CTN: 18 pcs




Light distribution parameters

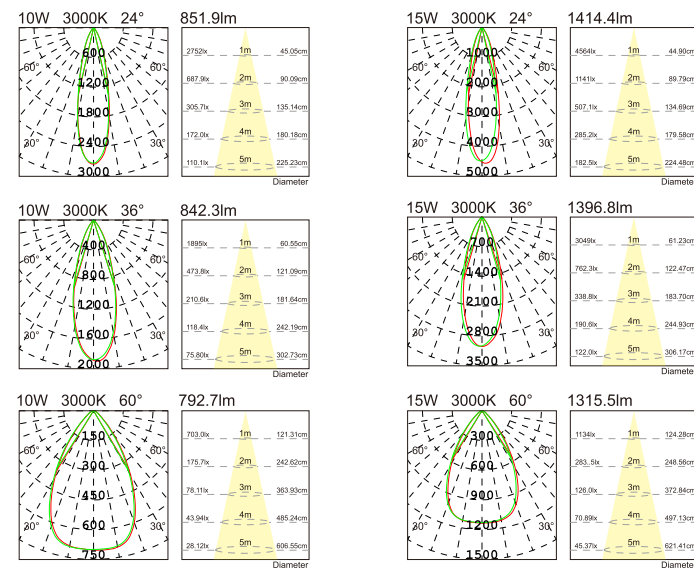


**NR1052**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
2x10W	2700K	CREE COB	≥80	24°	1733.9lm
2x15W	3000K			36°	1737.6lm
	4000K			60°	1612.6lm
	5000K			24°	2868.4lm
				36°	2851.3lm
				60°	2692.0lm

Size/CTN: 490×435×275 mm  
G.W./CTN: 12.15 kgs  
PCS/CTN: 12 pcs

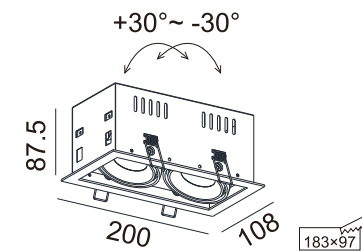

Light distribution parameters

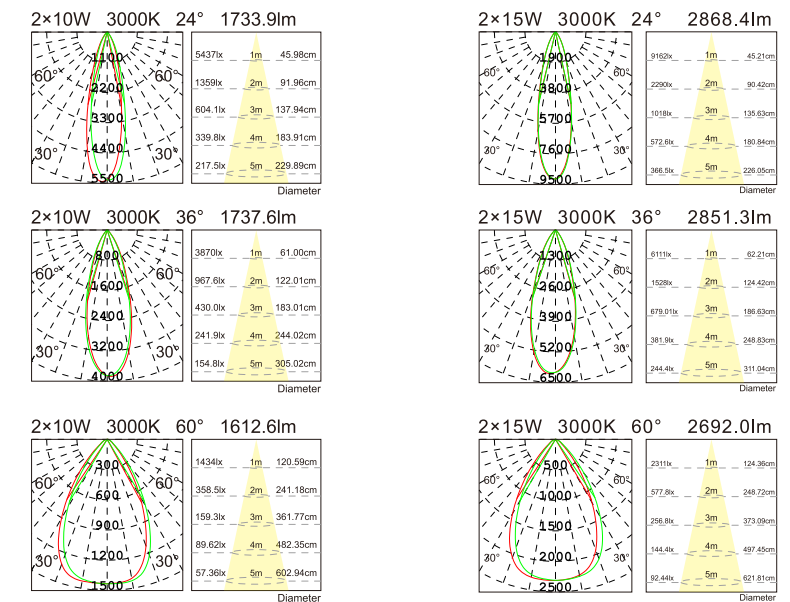





**NR1053**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
3x10W	2700K	CREE COB	≥80	24°	2622.8lm
3x15W	3000K			36°	2616.5lm
	4000K			60°	2391.2lm
	5000K			24°	4309.7lm
				36°	4338.3lm
				60°	4052.4lm

Size/CTN: 435×340×275 mm  
G.W./CTN: 8.77 kgs  
PCS/CTN: 6 pcs

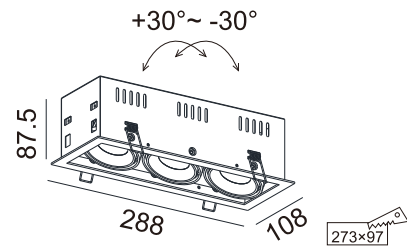


Light distribution parameters

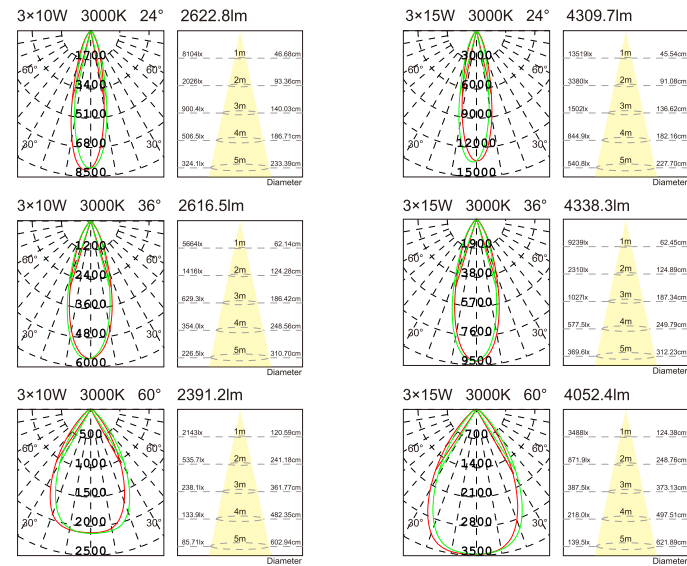


**NR1054**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
10W	2700K	CREE COB	≥80	24°	851.9lm
15W	3000K			36°	842.3lm
	4000K			60°	792.7lm
	5000K			24°	1414.4lm
				36°	1396.8lm
				60°	1315.5lm

Size/CTN: 480×450×275 mm  
G.W./CTN: 12.36 kgs  
PCS/CTN: 18 pcs



Light distribution parameters

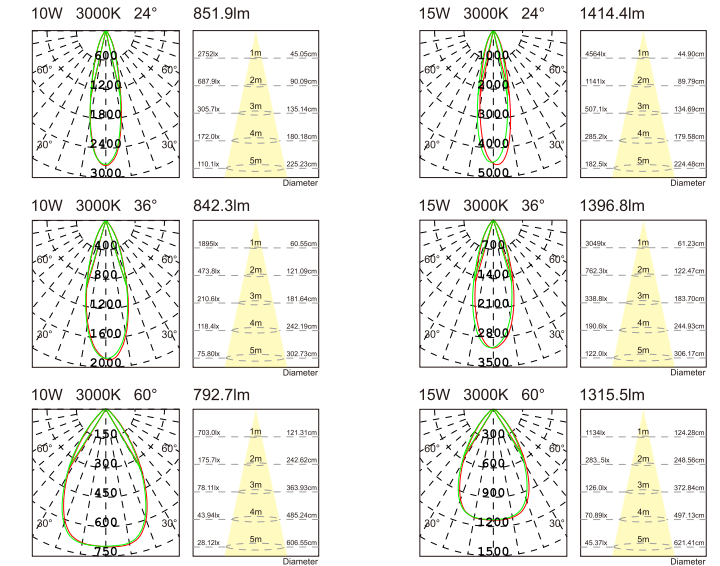







**NR1055**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
2x10W	2700K	CREE COB	≥80	24°	1733.9lm
2x15W	3000K			36°	1737.6lm
	4000K			60°	1612.6lm
	5000K			24°	2868.4lm
				36°	2851.3lm
				60°	2692.0lm

Size/CTN: 490×480×275 mm  
G.W./CTN: 14.96 kgs  
PCS/CTN: 12 pcs

Light distribution parameters

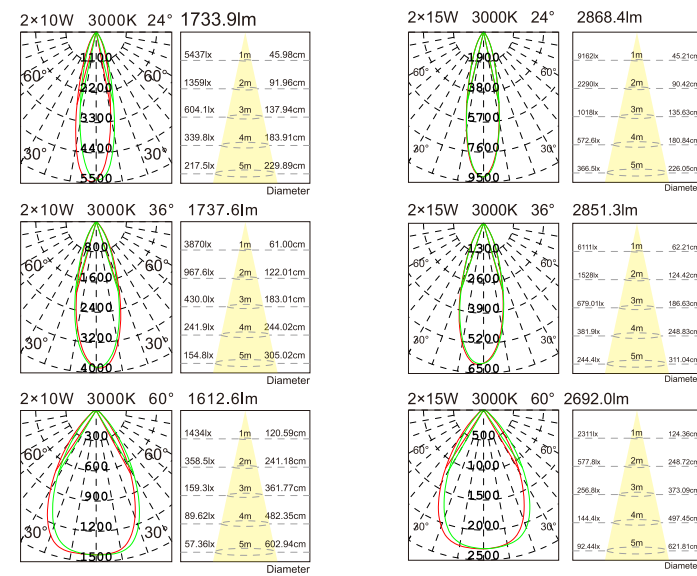
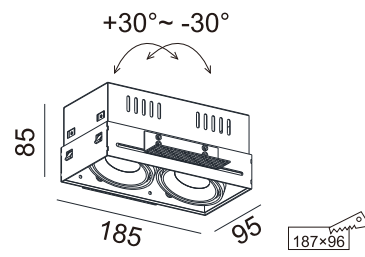


**NR1056**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
3x10W	2700K	CREE COB	≥80	24°	2622.8lm
3x15W	3000K			36°	2616.5lm
	4000K			60°	2391.2lm
	5000K			24°	4309.7lm
				36°	4338.3lm
				60°	4052.4lm

Size/CTN: 480×340×275 mm  
G.W./CTN: 10.47 kgs  
PCS/CTN: 6 pcs

Light distribution parameters

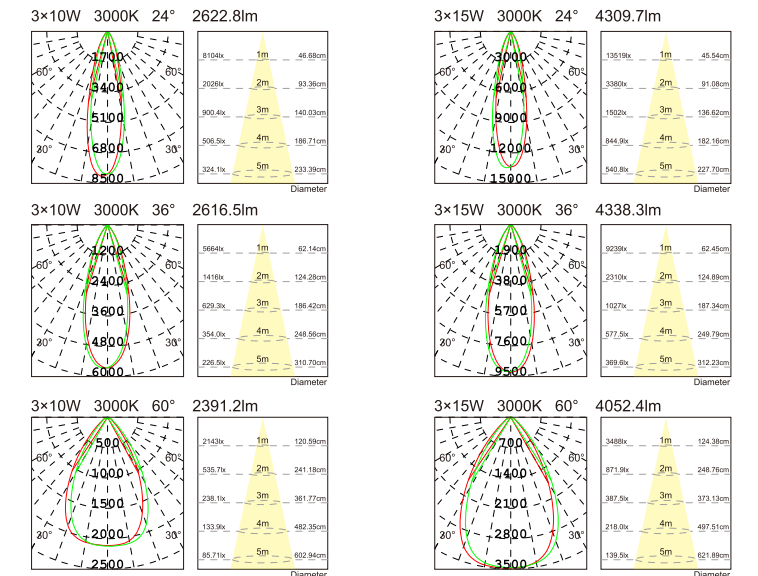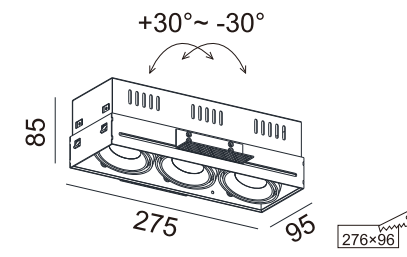



**NR1064**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
15W	2700K	CREE COB	≥80	15°	1309.5lm
18W	3000K			24°	1339.9lm
	4000K			50°	1338.3lm
	5000K			15°	1557.2lm
				24°	1534.6lm
				50°	1573.3lm


Size/CTN: 495×330×325 mm  
G.W./CTN: 15.89 kgs  
PCS/CTN: 12 pcs





**NR1066**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
2x15W	2700K	CREE COB	≥80	15°	2648.3lm
2x18W	3000K			24°	2672.9lm
	4000K			50°	2543.9lm
	5000K			15°	2965.5lm
				24°	2974.9lm
				50°	3063.8lm


Size/CTN: 595×330×325 mm  
G.W./CTN: 15.84 kgs  
PCS/CTN: 8 pcs



Light distribution parameters

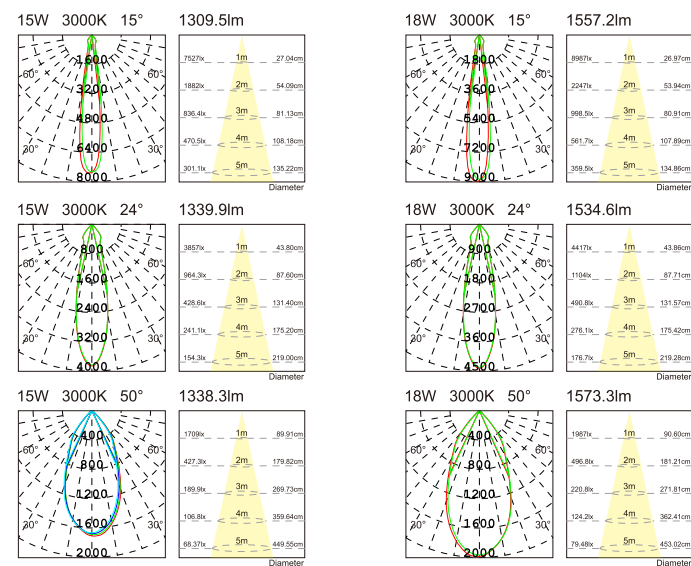

Light distribution parameters

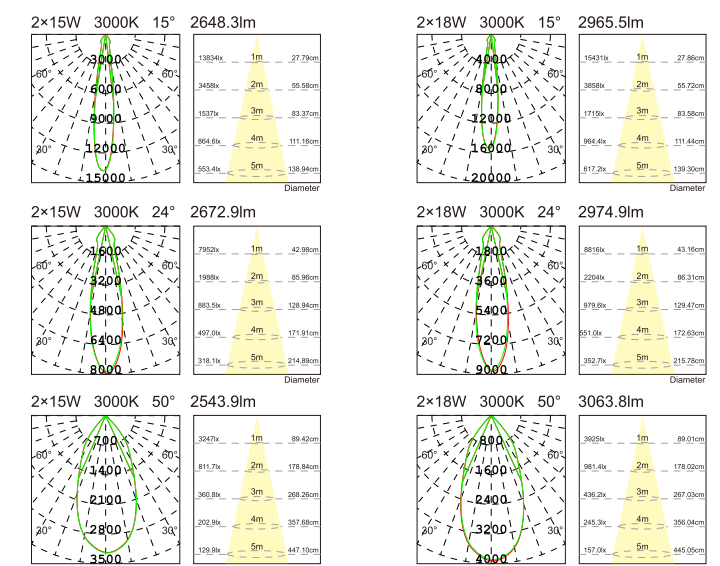







**NR1068**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
3x15W	2700K	CREE COB	≥80	15°	3673.4lm
3x18W	3000K			24°	3700.1lm
	4000K			50°	3936.2lm
	5000K			15°	4381.6lm
				24°	4362.1lm
		50°	4386.6lm		

Size/CTN: 495x420x325 mm  
G.W./CTN: 18.04 kgs  
PCS/CTN: 6 pcs

Light distribution parameters

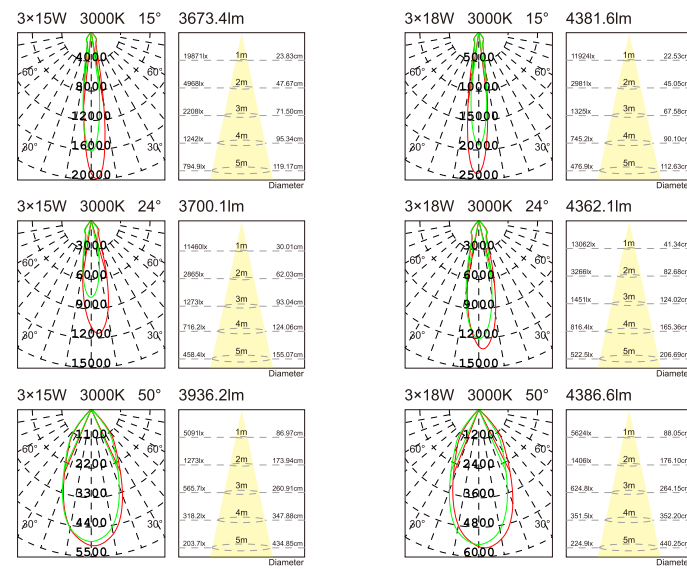
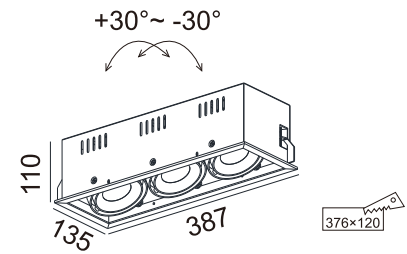


**NR1070**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
15W	2700K	CREE COB	≥80	15°	1309.5lm
18W	3000K			24°	1339.9lm
	4000K			50°	1338.3lm
	5000K			15°	1557.2lm
				24°	1534.6lm
		50°	1573.3lm		

Size/CTN: 495x385x325 mm  
G.W./CTN: 17.7 kgs  
PCS/CTN: 12 pcs

Light distribution parameters

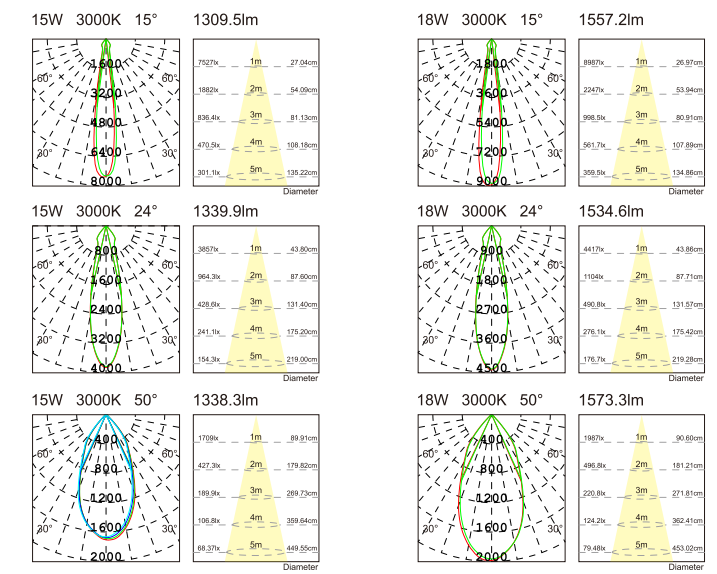





**NR1072**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
2x15W	2700K	CREE COB	≥80	15°	2648.3lm
2x18W	3000K			24°	2672.9lm
	4000K			50°	2543.9lm
	5000K			15°	2965.5lm
				24°	2974.9lm
				50°	3063.8lm

Size/CTN: 595×385×325 mm  
G.W./CTN: 18.79 kgs  
PCS/CTN: 8 pcs

Light distribution parameters

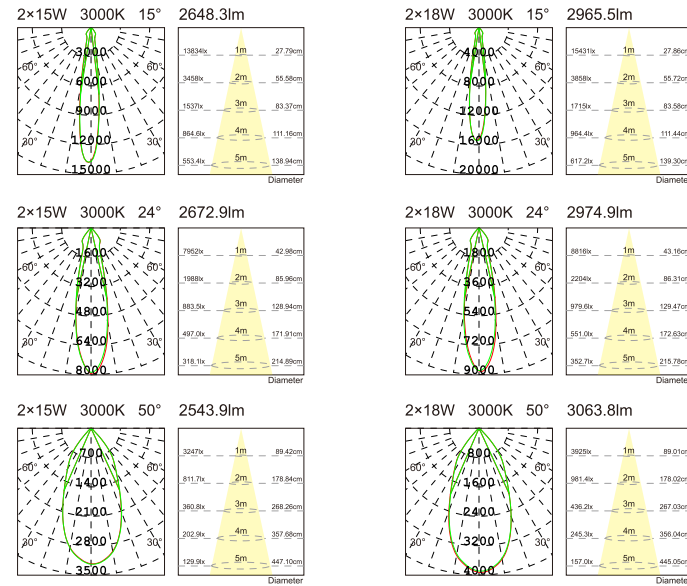



**NR1074**


Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
3x15W	2700K	CREE COB	≥80	15°	3673.4lm
3x18W	3000K			24°	3700.1lm
	4000K			50°	3926.2lm
	5000K			15°	4381.6lm
				24°	4362.1lm
				50°	4386.6lm

Size/CTN: 575×425×335 mm  
G.W./CTN: 18.66 kgs  
PCS/CTN: 6 pcs

Light distribution parameters

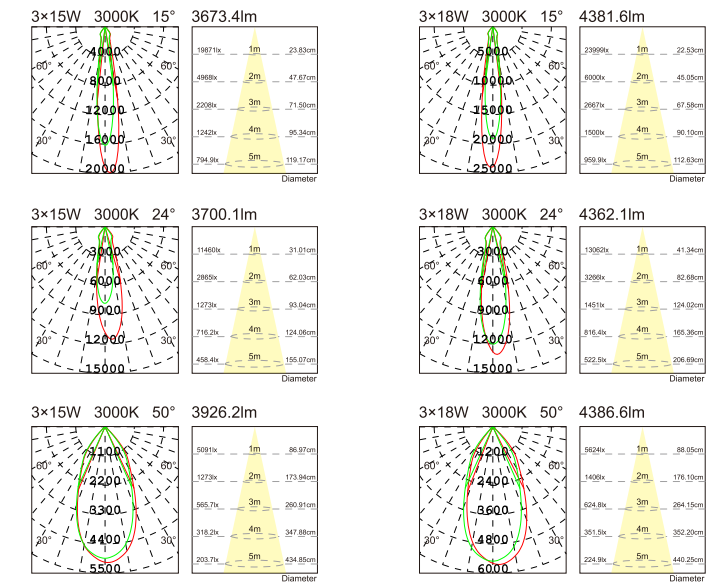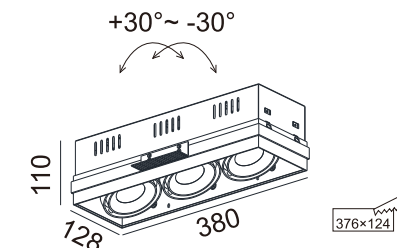







**NR1136**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
25W	2700K	CREE COB	≥80	15°	2523.7lm
30W	3000K			24°	2496.0lm
43W	4000K	CREE COB	≥80	38°	2450.1lm
	5000K			15°	2855.6lm
				24°	2829.4lm
				38°	2808.3lm
				15°	3575.8lm
				24°	3542.1lm
				38°	3521.2lm

Size/CTN: 415×415×355 mm  
G.W./CTN: 15.6 kgs  
PCS/CTN: 8 pcs

Light distribution parameters

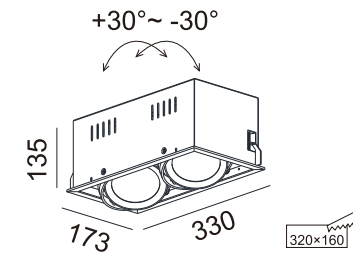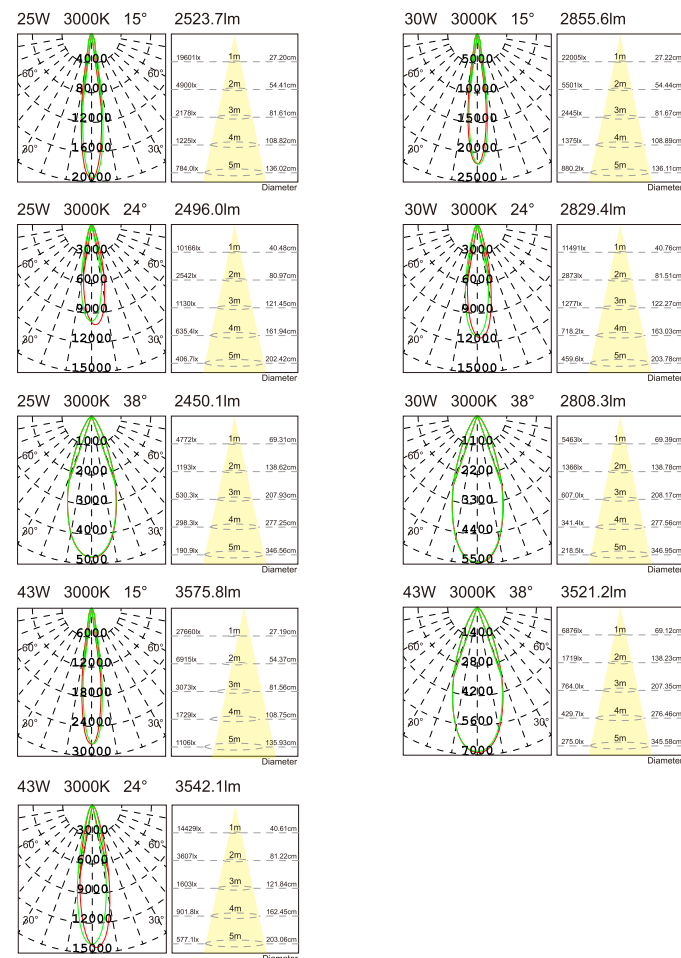



**NR1137**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
2x25W	2700K	CREE COB	≥80	15°	5278.5lm
2x30W	3000K			24°	5202.9lm
2x43W	4000K	CREE COB	≥80	38°	5070.1lm
	5000K			15°	6065.3lm
				24°	5994.5lm
				38°	5772.5lm
				15°	7542.0lm
				24°	7469.3lm
				38°	7295.9lm

Size/CTN: 615×365×365 mm  
G.W./CTN: 20.3 kgs  
PCS/CTN: 6 pcs

Light distribution parameters

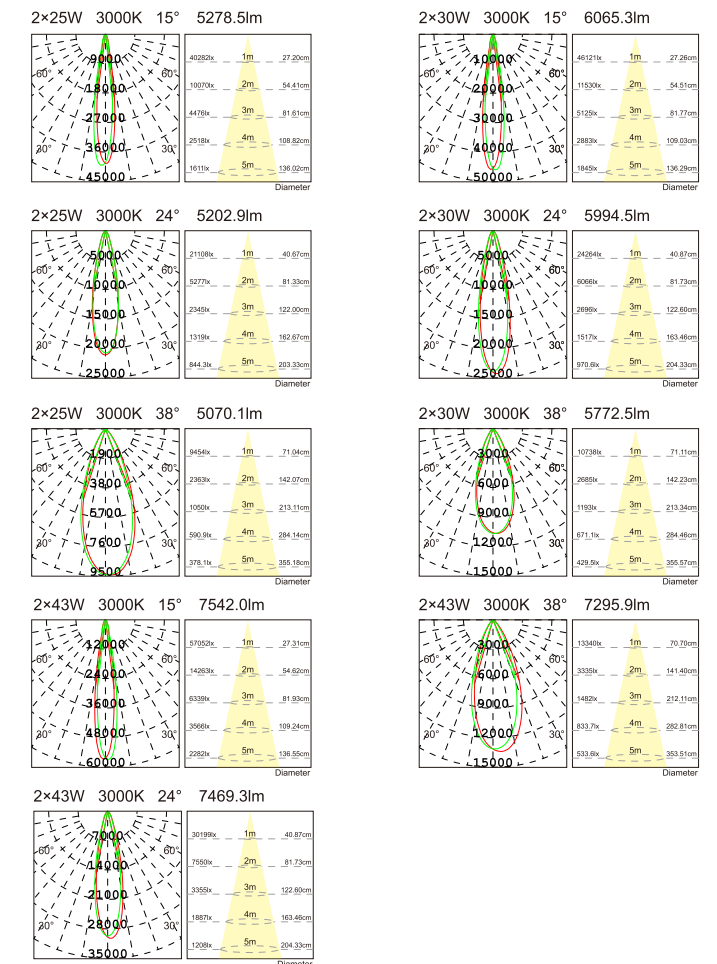





**NR1138**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
3x25W	2700K	CREE COB	≥80	15°	7606.8lm
3x30W	3000K			24°	7675.6lm
3x43W	4000K	CREE COB	≥80	38°	7561.2lm
	5000K			15°	8826.2lm
				24°	8618.7lm
				38°	8489.9lm
				15°	10990.6lm
				24°	10832.1lm
				38°	10654.5lm

Size/CTN: 540×410×355 mm  
G.W./CTN: 19.1 kgs  
PCS/CTN: 4 pcs

Light distribution parameters

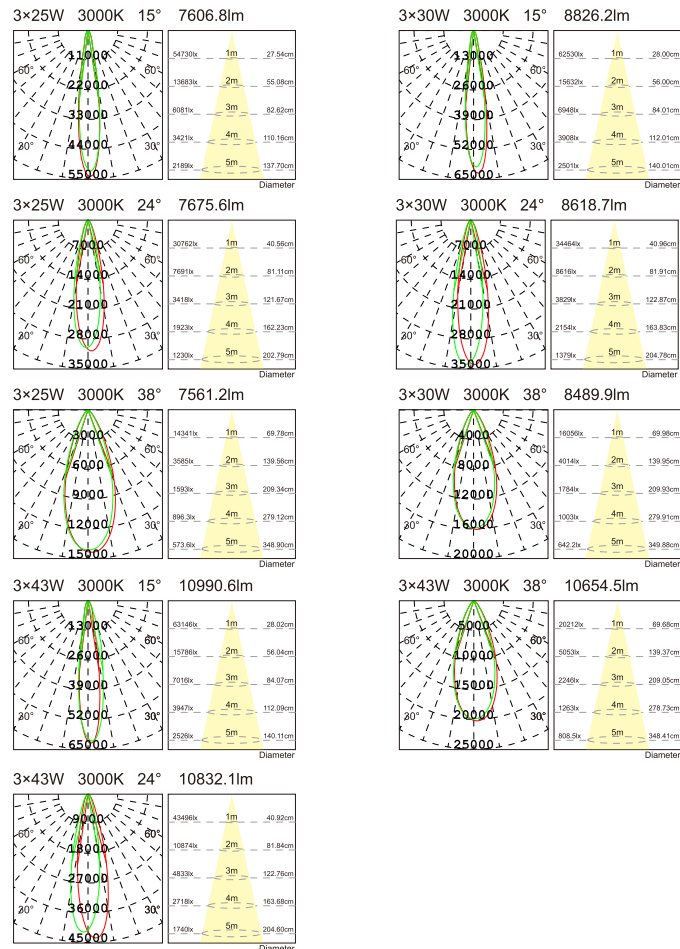


**NR1139**


Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
25W	2700K	CREE COB	≥80	15°	2523.7lm
30W	3000K			24°	2496.1lm
43W	4000K	CREE COB	≥80	38°	2450.1lm
	5000K			15°	2855.6lm
				24°	2829.4lm
				38°	2808.3lm
				15°	3575.8lm
				24°	3542.1lm
				38°	3521.2lm

Size/CTN: 465×410×365 mm  
G.W./CTN: 16.9 kgs  
PCS/CTN: 8 pcs

Light distribution parameters

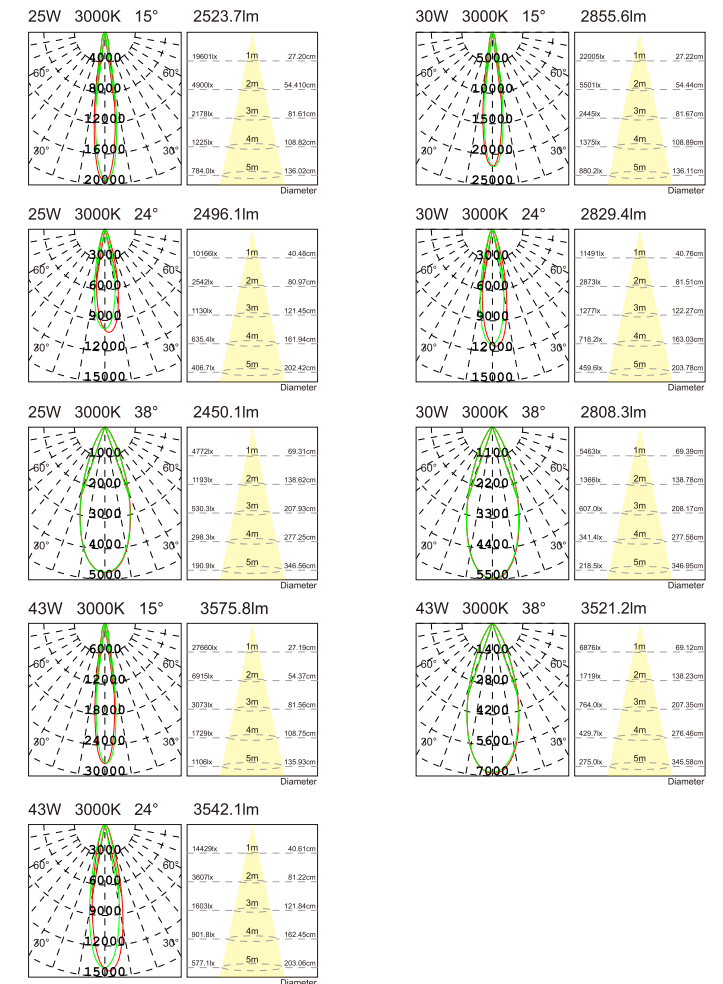




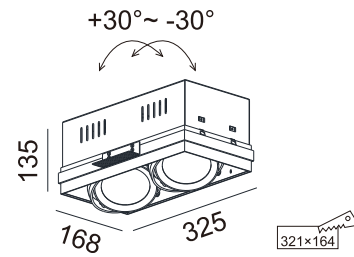


**NR1140**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
2x25W	2700K	CREE COB	≥80	15°	5278.5lm
2x30W	3000K			24°	5202.9lm
2x43W	4000K	CREE COB	≥80	38°	5070.1lm
	5000K			15°	6065.3lm
				24°	5994.5lm
				38°	5772.5lm
				15°	7542.0lm
				24°	7469.3lm
				38°	7295.9lm

Size/CTN: 690×365×365 mm  
G.W./CTN: 21.46 kgs  
PCS/CTN: 6 pcs

Light distribution parameters

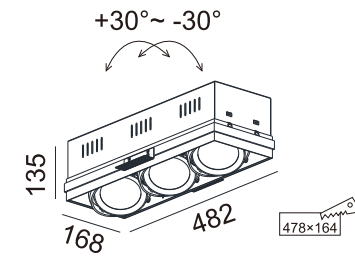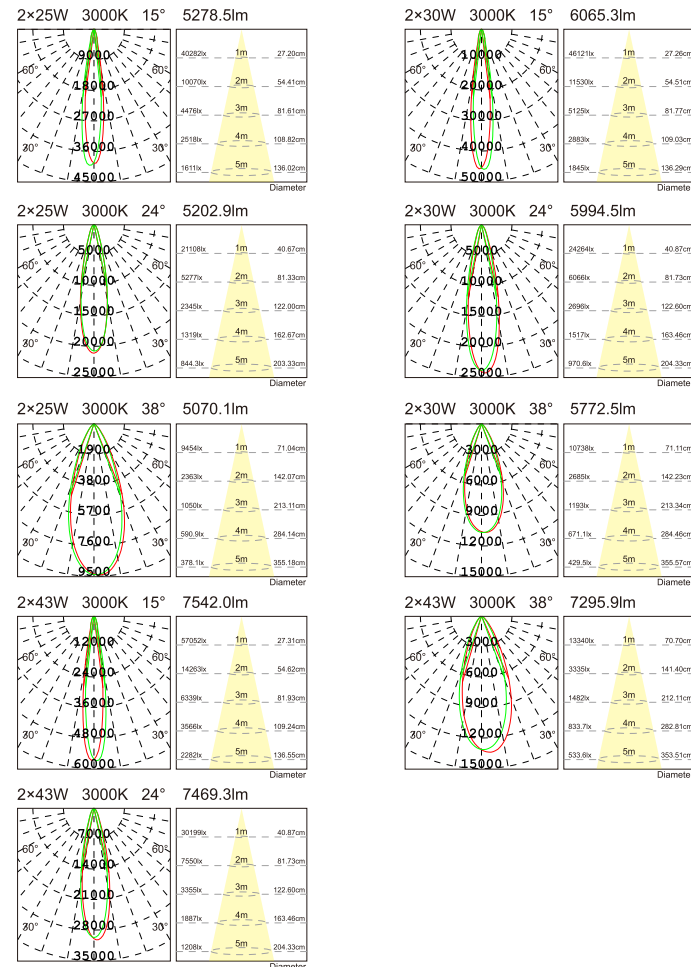

**NR1141**

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
3x25W	2700K	CREE COB	≥80	15°	7606.8lm
3x30W	3000K			24°	7675.6lm
3x43W	4000K	CREE COB	≥80	38°	7561.2lm
	5000K			15°	8826.2lm
				24°	8618.7lm
				38°	8489.9lm
				15°	10990.6lm
				24°	10832.1lm
				38°	10654.5lm

Size/CTN: 525×470×375 mm  
G.W./CTN: 19.7 kgs  
PCS/CTN: 4 pcs

Light distribution parameters

