

# NELUX TRACK SPOTLIGHT

## CATALOG 2022



nelux (HK) international,ltd

Track spot light for Museum, Art galleries, Fashion shops,...

SOROLLA series  
MUSEUM & GALLERY Track spot light




SOROLLA - A    SOROLLA - B    SOROLLA - C    SOROLLA - D    SOROLLA - E

PINAZO series  
MUSEUM & GALLERY Track spot light




PINAZO - A    PINAZO - B    PINAZO - C    PINAZO - D

MAX Z series  
MUSEUM & GALLERY Track spot light

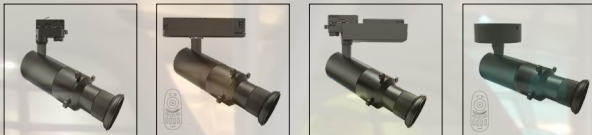

MAX Z - A    MAX Z - B    MAX Z - C    MAX Z - D

SUPRA series  
MUSEUM & GALLERY Track spot light

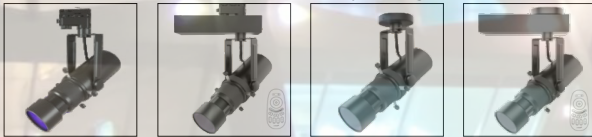

SUPRA - A    SUPRA - B    SUPRA - C    SUPRA - D

BENLIURE series  
MUSEUM & GALLERY Track spot light



BENLIURE - A    BENLIURE - B    BENLIURE - C    BENLIURE - D

MONGRELL series  
MUSEUM & GALLERY Track spot light



MONGRELL-A    MONGRELL-B    MONGRELL-C    MONGRELL-D

Track spot light for Retail shops, Fashion shops, Private houses, Hotels, apartments, modern kitchens,...

**MAX H** series

DIFFERENT APPLICATIONS Track spot light



MAX H - A



MAX H - B



MAX H - C



MAX H - D

**MASK** series

RETAIL & FASHION SHOP Track spot light



MASK

**ZOOM** series

RETAIL & FASHION SHOP Track spot light



TS85120



TS85265



TS71134




TS85152



TS95158

**DOTTY** series

RETAIL & FASHION SHOP Track spot light



TS12097



TS13894



TS180100

**PLANE** series

RETAIL & FASHION SHOP Track spot light



TS29166

**CONE** series

RETAIL & FASHION SHOP Track spot light



TS88110



TS100130



TS113150

**CEILA** series

RETAIL & FASHION SHOP Track spot light



TS85104



TS95112



TS106123

Track spot light for Retail shops, Fashion shops, Private houses, Hotels, apartments, modern kitchens,...

**PEQUE** series  
HOME application -Track spot light



PEQUE 6W

**KONIK** series  
RETAIL SHOPS application -Track spot light



KONIK-TS88110 20W



KONIK-TS100130 28W



KONIK-TS113150 35W-42W

**TUBE** series  
RETAIL SHOPS & HOME application -Track spot light



TUBE-TS58130 10W



TUBE-TS66135 14W





TUBE-TS73155 20W



TUBE-TS80170 24W

**SOROLLA SERIES**

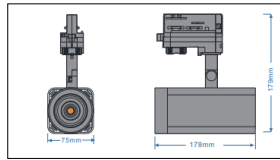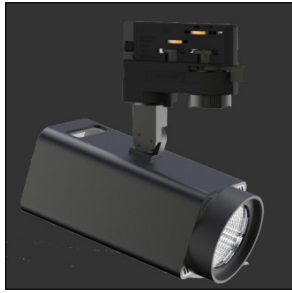

Technical Data / Datos técnicos



Model	SOROLLA-A	Working temperature	-20°C +45°C
Light source	CCT adjust	Material	Aluminum
Power	20W/25W	Housing colour	White/Black/White Oak/Red Oak/Walnut
Beam angle	15°/24°/36°/60°	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K/5000K/5700K	Working life	50000 Hrs
Luminous efficacy	100-120lm/W	Led chip	Citizen/Osram/Cree/Evercore
Input Voltage	AC220-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips/Lifud
Output Voltage	DC36V	Installation	Adapter on track
Binning initial	< 3 MacAdam	Warranty	5 Years

Packaging / Embalaje

N.W. Peso Neto ... 0.89Kg

G.W. Peso Bruto 1.01Kg/Box  
Size 125 x115 x210mm

G.W. Peso Bruto 11.02Kg/CTN - 10pcs/CTN  
Size 600 x265 x235mm

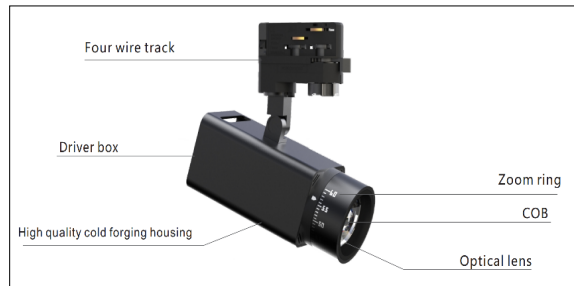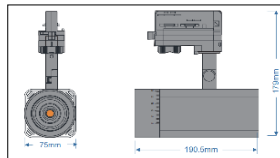

Technical Data / Datos técnicos


Model	SOROLLA-B	Working temperature	-20°C +45°C
Light source	CCT adjust	Material	Aluminum
Power	20W/25W	Housing colour	White/Black/White Oak/Red Oak/Walnut
Beam angle	10°~60°	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K/5000K/5700K	Working life	50000 Hrs
Luminous efficacy	100-120lm/W	Led chip	Citizen/Osram/Cree/Evercore
Input Voltage	AC220-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips/Lifud
Output Voltage	DC36V	Installation	Adapter on track
Binning initial	< 3 MacAdam	Warranty	5 Years

Packaging / Embalaje


N.W. Peso Neto ... 0.995Kg

G.W. Peso Bruto 1.15Kg/Box  
Size 125 x115 x210mm

G.W. Peso Bruto 12.7Kg/CTN - 10pcs/CTN  
Size 600 x265 x235mm

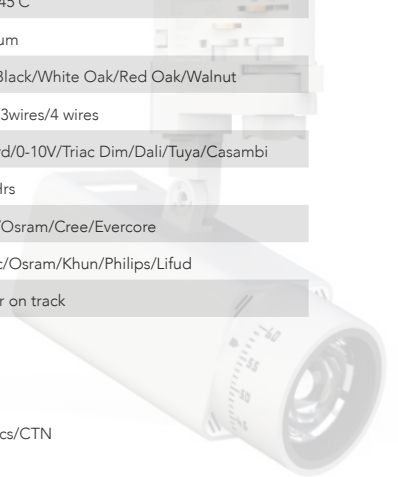

**SOROLLA SERIES**

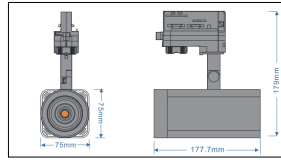

Technical Data / Datos técnicos



Model	SOROLLA-C	Working temperature	-20°C +45°C
Light source	CCT adjust	Material	Cold Forging+PC94V0
Power	20W/25W	Housing colour	White/Black/White Oak/Red Oak/Walnut
Beam angle	12°/15°/22°/24°/40°/60°	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K/5000K/5700K	Working life	50000 Hrs
Luminous efficacy	100-120lm/W	Led chip	Citizen/Osram/Cree/Evercore
Input Voltage	AC220-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips/Lifud
Output Voltage	DC36V	Installation	Adapter on track
Binning initial	< 3 MacAdam	Warranty	5 Years

Packaging / Embalaje

N.W. Peso Neto ... 0.95Kg

G.W. Peso Bruto 1.02Kg/Box  
Size 125 x115 x210mm

G.W. Peso Bruto 11.5Kg/CTN - 10pcs/CTN  
Size 600 x265 x235mm



Technical Data / Datos técnicos

Model	SOROLLA-D	Working temperature	-20°C +45°C
Light source	CCT adjust	Material	Aluminum
Power	20W/25W	Housing colour	White/Black/White Oak/Red Oak/Walnut
Beam angle	5°~60° zoomable	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K/5000K/5700K	Working life	50000 Hrs
Luminous efficacy	100-120lm/W	Led chip	Citizen/Osram/Cree/Evercore
Input Voltage	AC220-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips/Lifud
Output Voltage	DC36V	Installation	Adapter on track
Binning initial	< 3 MacAdam	Warranty	5 Years


Packaging / Embalaje

N.W. Peso Neto ... 1.1095Kg

G.W. Peso Bruto 1.20Kg/Box  
Size 125 x115 x210mm

G.W. Peso Bruto 12.5Kg/CTN - 10pcs/CTN  
Size 600 x265 x235mm

**SOROLLA SERIES**



Technical Data / Datos técnicos

Model	SOROLLA-E	Working temperature	-20°C +45°C
Light source	CCT adjust	Material	Aluminum
Power	20W/25W	Housing colour	White/Black/White Oak/Red Oak/Walnut
Beam angle	12°-70°	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K/5000K/5700K	Working life	50000 Hrs
Luminous efficacy	100-120lm/W	Led chip	Citizen/Osram/Cree/Evercore
Input Voltage	AC220-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips/Lifud
Output Voltage	DC36V	Installation	Adapter on track
Binning initial	< 3 MacAdam	Warranty	5 Years

Packaging / Embalaje

N.W. Peso Neto ... 1.02Kg



G.W. Peso Bruto 1.17Kg/Box  
Size 125 x115 x210mm



G.W. Peso Bruto 12.9Kg/CTN - 10pcs/CTN  
Size 600 x265 x235mm



**PINAZO SERIES**

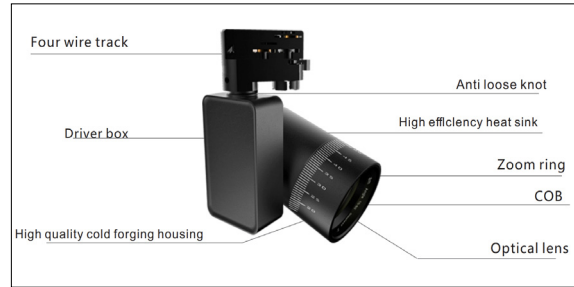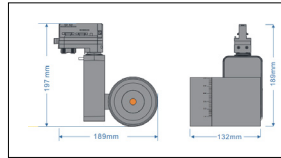

Technical Data / Datos técnicos



Model	PINAZO-A	Working temperature	-20°C +45°C
Light source	CCT adjust	Material	Cold Forging+PC94V0
Power	30W/35W	Housing colour	White/Black/White Oak/Red Oak/Walnut
Beam angle	10°-60°	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K/5000K/5700K	Working life	50000 Hrs
Luminous efficacy	100-120lm/W	Led chip	Citizen/Osram/Cree/Evercore
Input Voltage	AC220-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips/Lifud
Output Voltage	DC36V	Installation	Adapter on track
Binning initial	< 3 MacAdam	Warranty	5 Years

Packaging / Embalaje

N.W. Peso Neto ... 1.15Kg

G.W. Peso Bruto 1.26Kg/Box  
Size 170 x135 x230mm

G.W. Peso Bruto 13.7Kg/CTN - 10pcs/CTN  
Size 690 x360 x255mm

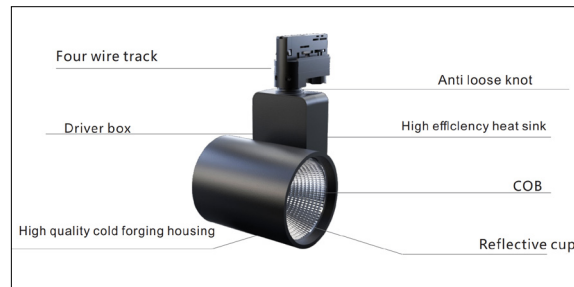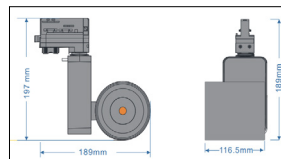

Technical Data / Datos técnicos

Model	PINAZO-B	Working temperature	-20°C +45°C
Light source	CCT adjust	Material	Aluminum
Power	30W/35W	Housing colour	White/Black/White Oak/Red Oak/Walnut
Beam angle	12°/24°/36°/60°	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K/5000K/5700K	Working life	50000 Hrs
Luminous efficacy	100-120lm/W	Led chip	Citizen/Osram/Cree/Evercore
Input Voltage	AC220-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips/Lifud
Output Voltage	DC36V	Installation	Adapter on track
Binning initial	< 3 MacAdam	Warranty	5 Years

Packaging / Embalaje



N.W. Peso Neto ... 0.92Kg

G.W. Peso Bruto 1.03Kg/Box  
Size 170 x135 x230mm

G.W. Peso Bruto 11.5Kg/CTN - 10pcs/CTN  
Size 690 x360 x255mm



**PINAZO SERIES**

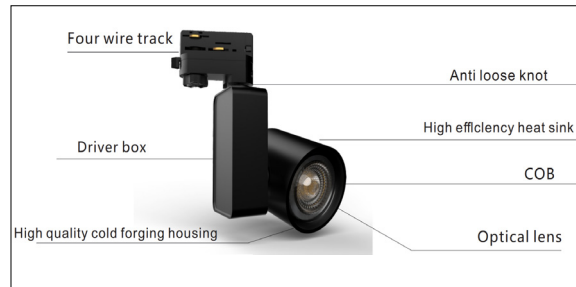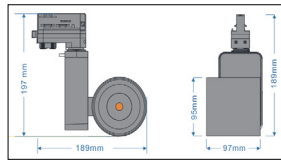

Technical Data / Datos técnicos




Model	PINAZO-C	Working temperature	-20°C +45°C
Light source	CCT adjust	Material	Cold Forging+PC94V0
Power	30W/35W	Housing colour	White/Black/White Oak/Red Oak/Walnut
Beam angle	12°/22°/38°/60°	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K/5000K/5700K	Working life	50000 Hrs
Luminous efficacy	100-120lm/W	Led chip	Citizen/Osram/Cree/Evercore
Input Voltage	AC220-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips/Lifud
Output Voltage	DC36V	Installation	Adapter on track
Binning initial	< 3 MacAdam	Warranty	5 Years

Packaging / Embalaje

N.W. Peso Neto ... 0.93Kg

G.W. Peso Bruto 1.04Kg/Box  
Size 170 x135 x230mm

G.W. Peso Bruto 11.5Kg/CTN - 10pcs/CTN  
Size 690 x360 x255mm

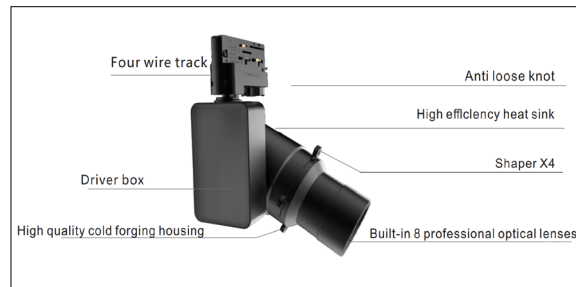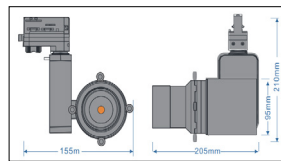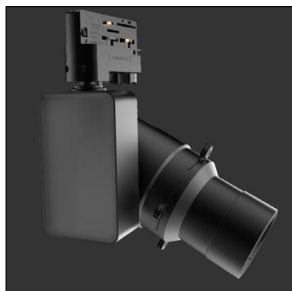

Technical Data / Datos técnicos


Model	PINAZO-D	Working temperature	-20°C +45°C
Light source	CCT adjust	Material	Aluminum
Power	30W/35W	Housing colour	White/Black/White Oak/Red Oak/Walnut
Beam angle	5°~60° zoomable	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K/5000K/5700K	Working life	50000 Hrs
Luminous efficacy	100-120lm/W	Led chip	Citizen/Osram/Cree/Evercore
Input Voltage	AC220-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips/Lifud
Output Voltage	DC36V	Installation	Adapter on track
Binning initial	< 3 MacAdam	Warranty	5 Years

Packaging / Embalaje

N.W. Peso Neto ... 1.85Kg

G.W. Peso Bruto 2.1Kg/Box  
Size 230 x225 x175mm

G.W. Peso Bruto 13.8Kg/CTN - 10pcs/CTN  
Size 695 x250 x290mm

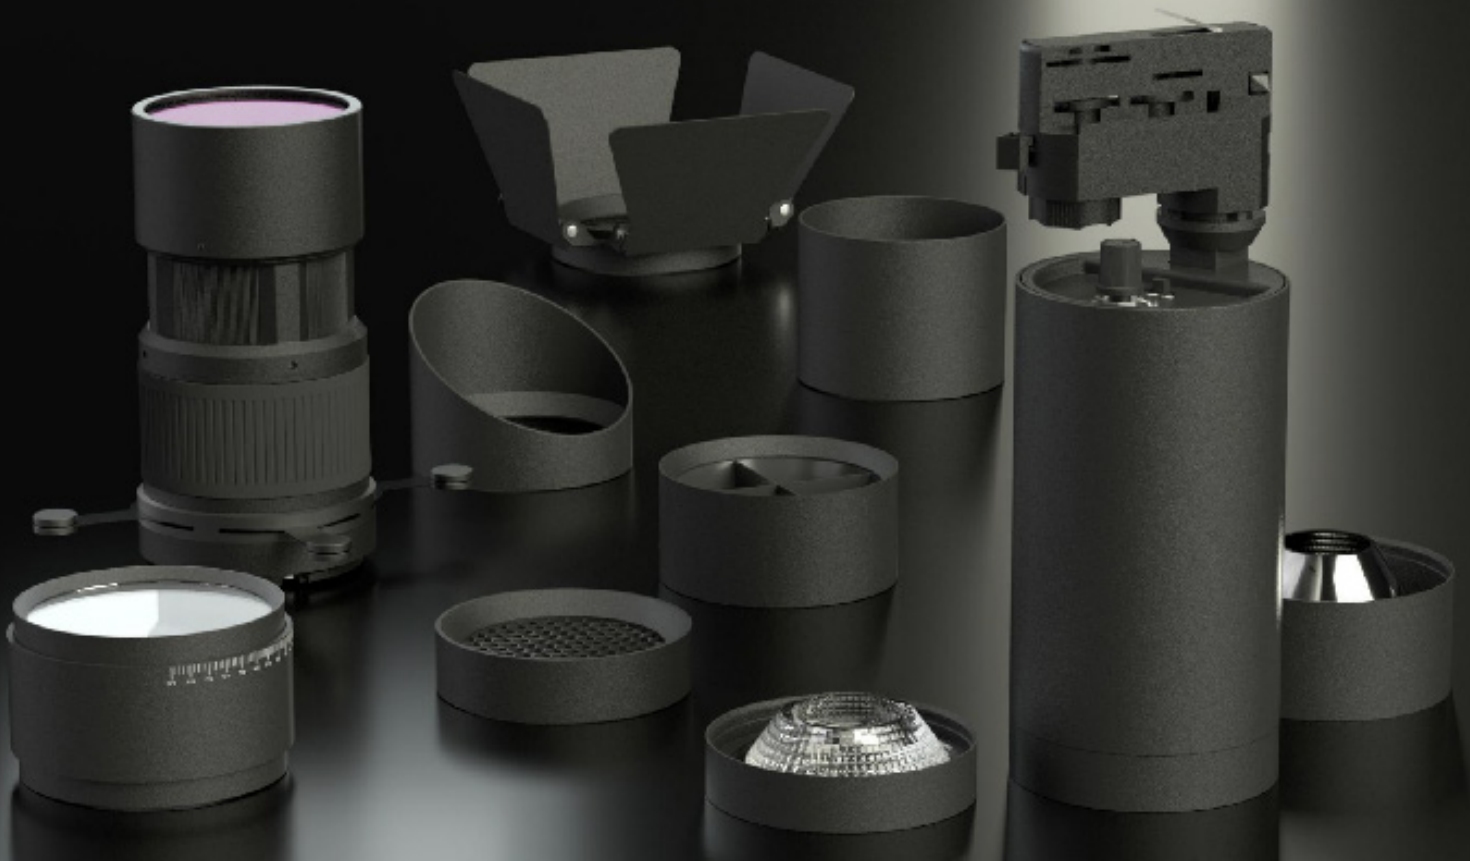

**Multiple track lights in just one**

- Changeable Beam Angle
- Changeable CCT
- Adjustable Brightness
- Light Shapes can be adjustable

**You can choose the right light source for your projects**

Butcher shop   Fish shop   Bakery   Greengrocery   Retail shop



**MAX H SERIES**

TRACK ADAPTOR



TRACK ADAPTOR




TRACK ADAPTOR




SURFACE MOUNTED




MAX H - A

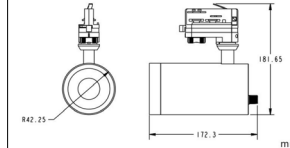



MAX H - B

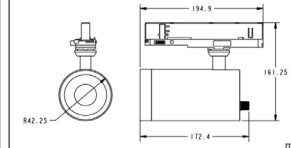


MAX H - C

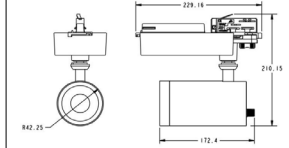

MAX H - D

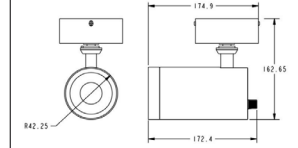

Accessories / Accesorios



Technical Data / Datos técnicos

Model	MAXH	Working temperature	-20°C +45°C
Light source	CCT adjust	Material	Aluminum
Power	20W/30W	Housing colour	White/Black
Beam angle	12°/24°/38°/60°/10°-60°	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim
CCT	2700K/3000K/4000K/5000K/5700K	Working life	50000 Hrs
Luminous efficacy	90-100lm/W	Led chip	Citizen/Osram/Cree
Input Voltage	AC220-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips
Output Voltage	DC36V	Installation	Adapter on track or Surface Mounted
Binning initial	< 3 MacAdam	Warranty	5 Years




**MAX Z SERIES**

TRACK ADAPTOR




MAX Z - A



TRACK ADAPTOR




MAX Z - B

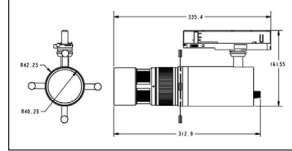

TRACK ADAPTOR






MAX Z - C



SURFACE MOUNTED



MAX Z - D



Different Shapes



Technical Data / Datos técnicos

Model	MAX-Z	Working temperature	-20°C +45°C
Light source	CCT adjust	Material	Aluminum
Power	20W/30W	Housing colour	White/Black
Beam angle	10°-60°	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim
CCT	2700K/3000K/4000K/5000K/5700K	Working life	50000 Hrs
Luminous efficacy	70lm/W	Led chip	Citizen/Osram/Cree
Input Voltage	AC220-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips
Output Voltage	DC36V	Installation	Adapter on track or Surface Mounted
Binning initial	< 3 MacAdam	Warranty	5 Years

Different Applications




**SUPRA SERIES**

TRACK ADAPTOR



SUPRA-A




On-Off / 0-10V dimmable

TRACK ADAPTOR



SUPRA-B

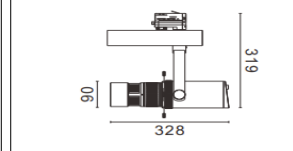


DALI/Triac/2.4G RF dimmable

SURFACE MOUNTED



SUPRA-C-SM




On-Off / 0-10V dimmable



SURFACE MOUNTED




SUPRA-D-SM

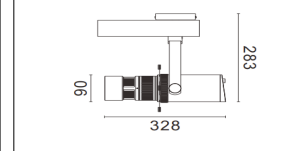

DALI/Triac/2.4G RF dimmable



Different Shapes



Technical Data / Datos técnicos

Model	SUPRA	Working temperature	-20°C +45°C
Light source	COB	Material	Aluminum
Power	25W 30W 35W	Housing colour	White/Black
Beam angle	5°-60° ZOOMABLE	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	DALI/0-10V/Triac Dim/2.4G RF
CCT	2700K/3000K/4000K/5000K/RGBW	Working life	50000 Hrs
Luminous efficacy	1250lm / 1500lm / 1750lm	Led chip	Citizen/Osram/Cree
Input Voltage	AC200-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips
Output Voltage	DC36V	Installation	Adapter on track or Surface Mounted
Binning initial	< 3 MacAdam	Warranty	5 Years

Different Applications Museum, Art gallery, Showrooms,...




**BENLLIURE SERIES**

TRACK ADAPTOR



BENLLIURE-A




On-Off / 0-10V dimmable

TRACK ADAPTOR



BENLLIURE-B




DALI/Triac/2.4G RF dimmable

SURFACE MOUNTED



BENLLIURE-C-SM




On-Off / 0-10V dimmable



SURFACE MOUNTED




BENLLIURE-D-SM



DALI/Triac/2.4G RF dimmable



Different Shapes



Technical Data / Datos técnicos

Model	BENLLIURE	Working temperature	-20°C +45°C
Light source	COB	Material	Aluminum
Power	20W 30W	Housing colour	White/Black
Beam angle	20°- 60° ZOOMABLE	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	DALI/0-10V/Triac Dim/2.4G RF
CCT	2700K/3000K/4000K/5000K/RGBW	Working life	50000 Hrs
Luminous efficacy	1000lm / 1500lm	Led chip	Citizen/Osram/Cree
Input Voltage	AC200-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips
Output Voltage	DC36V	Installation	Adapter on track or Surface Mounted
Binning initial	< 3 MacAdam	Warranty	5 Years






Different Applications Museum, Art gallery, Showrooms,...



**MONGRELL SERIES**






MONGRELL-A

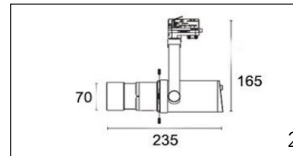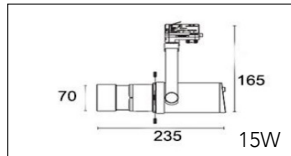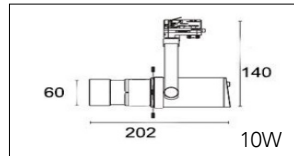

TRACK ADAPTOR On-Off and TRIAC dimmable



MONGRELL-B

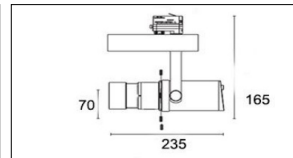
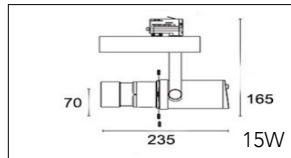
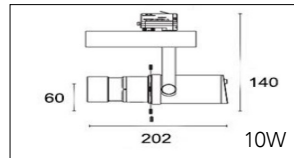


TRACK ADAPTOR DALI/0-10V/2.4G RF dimmable

20W






MONGRELL-C

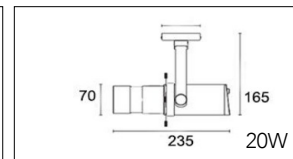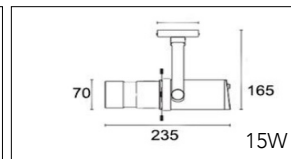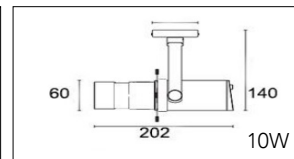



SURFACE MOUNTED On-Off and TRIAC dimmable



MONGRELL-D

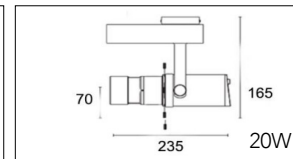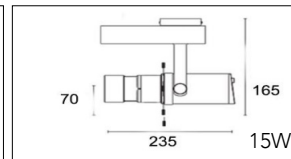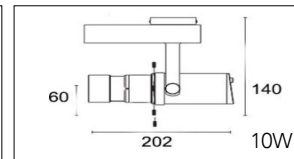

SURFACE MOUNTED DALI/0-10V/2.4G RF dimmable



Different Shapes






Different Shapes and colors



Technical Data / Datos técnicos

Model	MONGRELL	Working temperature	-20°C +45°C
Light source	COB	Material	Aluminum
Power	10W 15W 20W	Housing colour	White/Black
Beam angle	40°	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	DALI/0-10V/Triac Dim/2.4G RF
CCT	2700K/3000K/4000K/5000K/RGBW	Working life	50000 Hrs
Luminous efficacy	500lm / 750lm / 1000lm	Led chip	Citizen/Osram/Cree
Input Voltage	AC200-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips
Output Voltage	DC36V	Installation	Adapter on track or Surface Mounted
Binning initial	< 3 MacAdam	Warranty	5 Years

**MASK SERIES**



Technical Data / Datos técnicos

Model	MASK	Working temperature	-20°C +45°C
Light source	SMD5050	Material	Aluminum
Power	30W	Housing colour	White/Black
Beam angle	15°/24°/38°/50°/50x50°/35x75°	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	On-Off/0-10V
CCT	2700K/3000K/4000K/5000K/6000K	Working life	50000 Hrs
Luminous efficacy	80lm/W	Led chip	Citizen/Osram
Input Voltage	AC220-240V 50/60Hz	Driver	/Osram/Khun/Philips
Output Voltage	DC36V	Installation	Adapter on track
Binning initial	< 3 MacAdam	Warranty	5 Years

Packaging / Embalaje

N.W. Peso Neto ... 2.0Kg



G.W. Peso Bruto 2.1Kg/Box




G.W. Peso Bruto 22.7Kg/CTN - 10pcs/CTN

Description / Descripción

The main characteristic feature of MASK product is its avant-gard design. Housing integrates the control gear, with a sophisticated thermal management ensuring a long service life. Innovative photometrics, easy adjustment, and good performance are convincing arguments for using in museums, galleries, salesrooms, show-rooms. Mask is ideal for accent lighting across large distances in rooms with high ceilings as well as for intensive illumination of walls. It is a wonderful track spot light for creative lighting concepts with a really efficient visual comfort.

Beam angle shapes

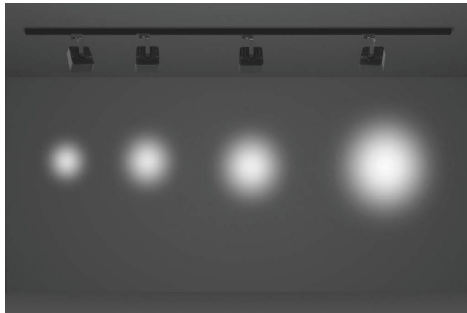

Back side



Beam angle shapes




Possible Applications / Aplicaciones posibles Fashion shops, modern offices



nelux (HK) international,ltd

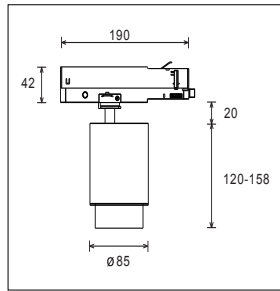


**ZOOM SERIES****Description**

Aluminium die-casting , electrostatic powder coating . Housing with lens  
 Color:White /Black /Grey  
 Power/Voltage 10W, 20W  
 Beam angle:6°-60°  
 LED Citizen CLU711 1204C4 or Lumileds 1204  
 HD 2700K, 3000K, 4000K  
 CRI80, and CRI90,92, 97 under demand  
 Driver Integrated allooking alw20-40050TK (1-10V DIM)  
 Warranty :5 years

**Technical Data / Datos técnicos**

Model	ZOOM-Z12085	Working temperature	-20°C +45°C
Light source	Citizen	Material	Alumimum die-casting
Power	10W/20W	Housing colour	White/Black/Grey
Beam angle	6°~60°	Wiring	2 wires/3wires/4 wires
CRI	80/90/92/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K	Working life	50000 Hrs
Luminous efficacy	400~920lm	Led chip	Citizen/Lumileds
Input Voltage	AC220-240V 50/60Hz	Driver	Alllooking
Output Voltage	-	Installation	Adapter driver on track
Binning initial	-	Warranty	5 Years

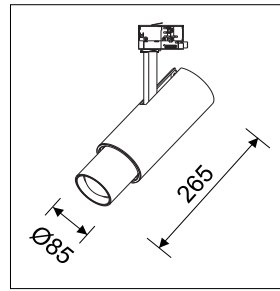**Description**

Aluminium die-casting , electrostatic powder coating . Housing with lens  
 Color:White /Black /Grey  
 Power/Voltage 25W  
 Beam angle:6°-60°  
 LED Citizen CLU711 1204C4 or Lumileds 1204  
 HD 2700K, 3000K, 4000K  
 CRI80, and CRI90,92, 97 under demand  
 Driver Integrated allooking alw20-40050TK (1-10V DIM)  
 Warranty :5 years


**Technical Data / Datos técnicos**

Model	ZOOM-Z85265	Working temperature	-20°C +45°C
Light source	CCT adjust	Material	Aluminum die-casting
Power	25W	Housing colour	White/Black/Grey
Beam angle	6°~60° zoomable	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K	Working life	50000 Hrs
Luminous efficacy	1010lm	Led chip	Citizen/Lumileds
Input Voltage	AC220-240V 50/60Hz	Driver	Alllooking
Output Voltage	-	Installation	Adapter driver on track
Binning initial	-	Warranty	5 Years

Possible Applications / Aplicaciones posibles Fashion shops, modern offices



**ZOOM SERIES**

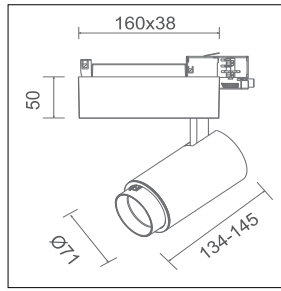



**Description**

Aluminium die-casting , electrostatic powder coating . Housing with lens  
 Input Voltage 220-240V AC 50-60Hz  
 Color:White /Black /Grey  
 Power/Voltage 20W  
 Beam angle:15°-45°  
 LED LUMILEDS  
 CCT 2700K, 3000K, 4000K  
 CRI80, and CRI90,92, 97 under demand  
 Driver PHILIPS, OSRAM , TRIDONIC  
 Warranty :5 years



**Technical Data / Datos técnicos**

Model	ZOOM-Z71134	Working temperature	-15°C +35°C
Light source	Lumiled	Material	Alumimum die-casting
Power	20W	Housing colour	White/Black/Grey
Beam angle	15°~45°	Wiring	2 wires/3wires/4 wires
CRI	80/90/92/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K	Working life	50000 Hrs
Luminous efficacy	1550~1870lm	Optic	led lens
Input Voltage	AC220-240V 50/60Hz	Driver	Philips, Osram, Tridonic
Output Voltage	-	Installation	Adapter driver on track
Binning initial	-	Warranty	5 Years

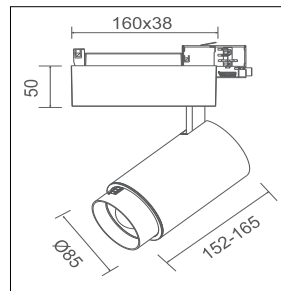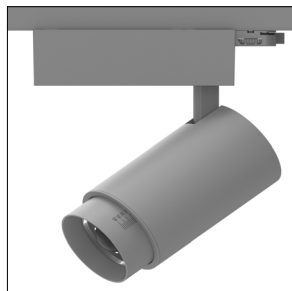

**Description**

Aluminium die-casting , electrostatic powder coating . Housing with lens  
 Input Voltage 220-240V AC 50-60Hz  
 Color:White /Black /Grey  
 Power/Voltage 28W  
 Beam angle:15°-65°  
 LED LUMILEDS  
 CCT 2700K, 3000K, 4000K  
 CRI80, and CRI90,92, 97 under demand  
 Driver PHILIPS, OSRAM , TRIDONIC  
 Warranty :5 years




**Technical Data / Datos técnicos**

Model	ZOOM-Z85152	Working temperature	-15°C +35°C
Light source	Lumiled	Material	Aluminum die-casting
Power	28W	Housing colour	White/Black/Grey
Beam angle	15°~60° zoomable	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K	Working life	50000 Hrs
Luminous efficacy	2290~3040lm	Optic	Led lens
Input Voltage	AC220-240V 50/60Hz	Driver	Philips, Osram, Tridonic
Output Voltage	-	Installation	Adapter driver on track
Binning initial	-	Warranty	5 Years

Possible Applications / Aplicaciones posibles Fashion shops, modern offices

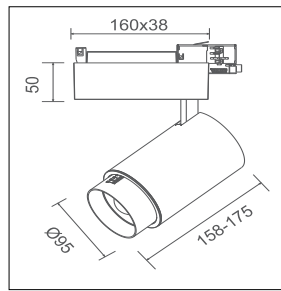

**ZOOM SERIES****Description**

Aluminium die-casting , electrostatic powder coating . Housing with lens  
 Input Voltage 220-240V AC 50-60Hz  
 Color:White /Black /Grey  
 Power/Voltage 35W  
 Beam angle:15°-60°  
 LED LUMILEDS  
 CCT 2700K, 3000K, 4000K  
 CRI80, and CRI90,92, 97 under demand  
 Driver PHILIPS, OSRAM , TRIDONIC  
 Warranty :5 years

**Technical Data / Datos técnicos**

Model	ZOOM-Z85158	Working temperature	-15°C +35°C
Light source	Lumiled	Material	Alumimum die-casting
Power	35W	Housing colour	White/Black/Grey
Beam angle	15°~60°	Wiring	2 wires/3wires/4 wires
CRI	80/90/92/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K	Working life	50000 Hrs
Luminous efficacy	2700~3230lm	Optic	led lens
Input Voltage	AC220-240V 50/60Hz	Driver	Philips, Osram, Tridonic
Output Voltage	-	Installation	Adapter driver on track
Binning initial	-	Warranty	5 Years

**Possible Applications / Aplicaciones posibles Fashion shops, modern offices**

nelux (HK) international,ltd

**DOTTY SERIES**






DOTTY - TS12097



DOTTY - TS13894



DOTTY - TS180100




**Description**

Aluminium die-casting , electrostatic powder coating . Reflector PC  
 Input Voltage 220-240V AC 50-60Hz and Multi-voltage  
 Color:White /Black /Grey  
 Power/Voltage 18W, 24W, 28W  
 Beam angle:15°, 35°, 45°  
 LED Osram  
 CCT 3000K, 4000K as standard other CCT available  
 CRI80, and CRI90,92, 97 under demand  
 Driver Integrated Powegear, OSRAM ,  
 Warranty :5 years


**Technical Data / Datos técnicos**

Model	DOTTY series	Working temperature	-20°C +45°C
Light source	COB	Material	Aluminum die-casting
Power	18W, 24W, 28W	Housing colour	White/Black/Grey
Beam angle	15°, 35°, 45°	Wiring	Track connector 2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	DALI/0-10V/Triac Dim/2.4G RF
CCT	3000K/4000K	Working life	50000 Hrs
Luminous efficacy	1250lm / 1650lm / 1920lm	Led chip	Osram
Input Voltage	AC200-240V 50/60Hz	Driver	Powergear, Osram
Output Voltage	-	Installation	Adapter on track or Surface Mounted
Binning initial	-	Warranty	5 Years


**Possible Applications / Aplicaciones posibles** Fashion shops, modern offices

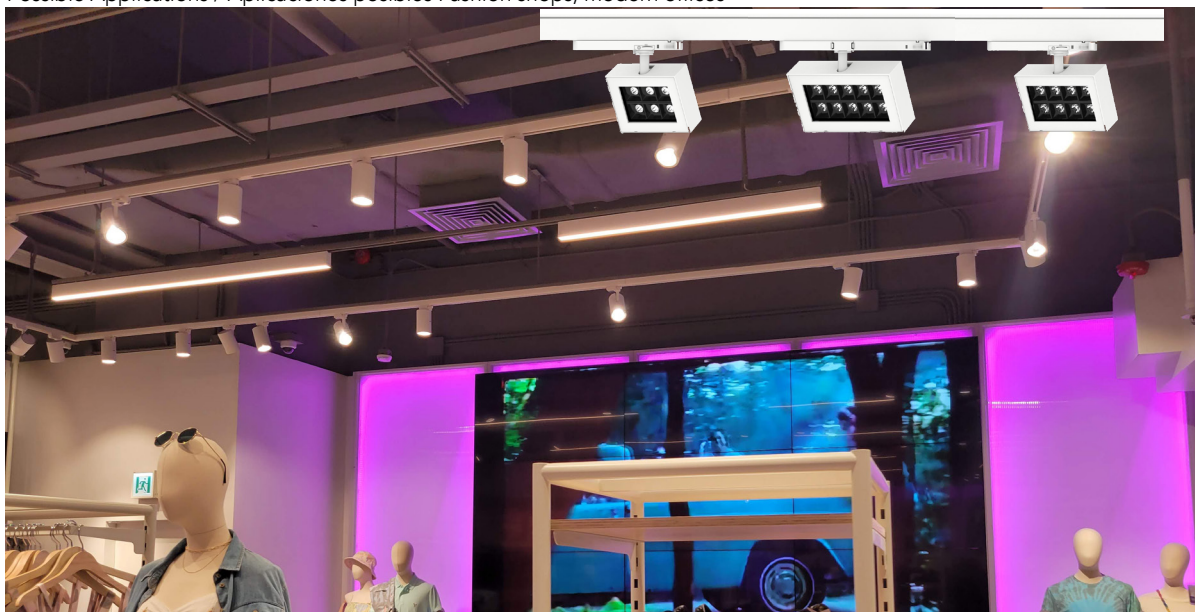

nelux (HK) international,ltd

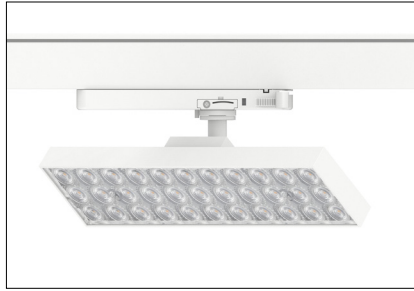**PLANE SERIES**

PLANE - TS291166

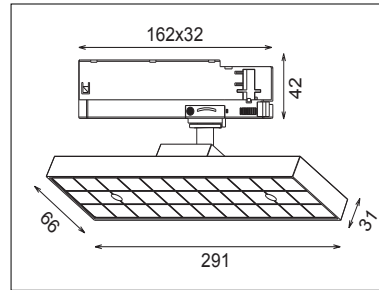**Main Data**


Aluminium die-casting , electrostatic powder coating . Led  
 Lens PC  
 Input Voltage 220-240V AC 50-60Hz and Multi-voltage  
 Color:White /Black /Grey  
 Power/Voltage 18W, 24W, 28W  
 Beam angle:30°, 60°, 90°  
 LED Bridgelux  
 CCT 3000K, 4000K as standard other CCT available  
 CRI80, and CRI90,92, 97 under demand  
 Driver Integrated Powegear, OSRAM ,  
 Warranty :5 years

**Technical Data / Datos técnicos**

Model	PLANE TS291166	Working temperature	-20°C +45°C
Light source	Led	Material	Aluminum die-casting
Power	20W	Housing colour	White/Black
Beam angle	30°/60°/90°	Wiring	2 wires/3wires/4 wires
CRI	> 80 as standard and 90/92/95/97 as option	Dimmable	On-Off/0-10V
CCT	3000K/4000K	Working life	50000 Hrs
Luminous efficacy	2100lm	Led chip	Bridgelux
Input Voltage	AC220-240V 50/60Hz	Driver	/Osram/Khun/Powergear
Output Voltage	-	Installation	Adapter on track
Binning initial	-	Warranty	5 Years

**Description / Descripción**

The main characteristic feature of PLANE product is its avant-gard design. Integrated driver with a sophisticated thermal management ensuring a long service life. Innovative photometrics , easy adjustment, and good performance are convincing arguments for using in museums, galleries , salesrooms, showrooms. PLANE is ideal for general lighting in rooms with high ceilings as well as for intensive illumination of walls. It is a wonderful track spot light for creative lighting concepts with a really efficient visual comfort.

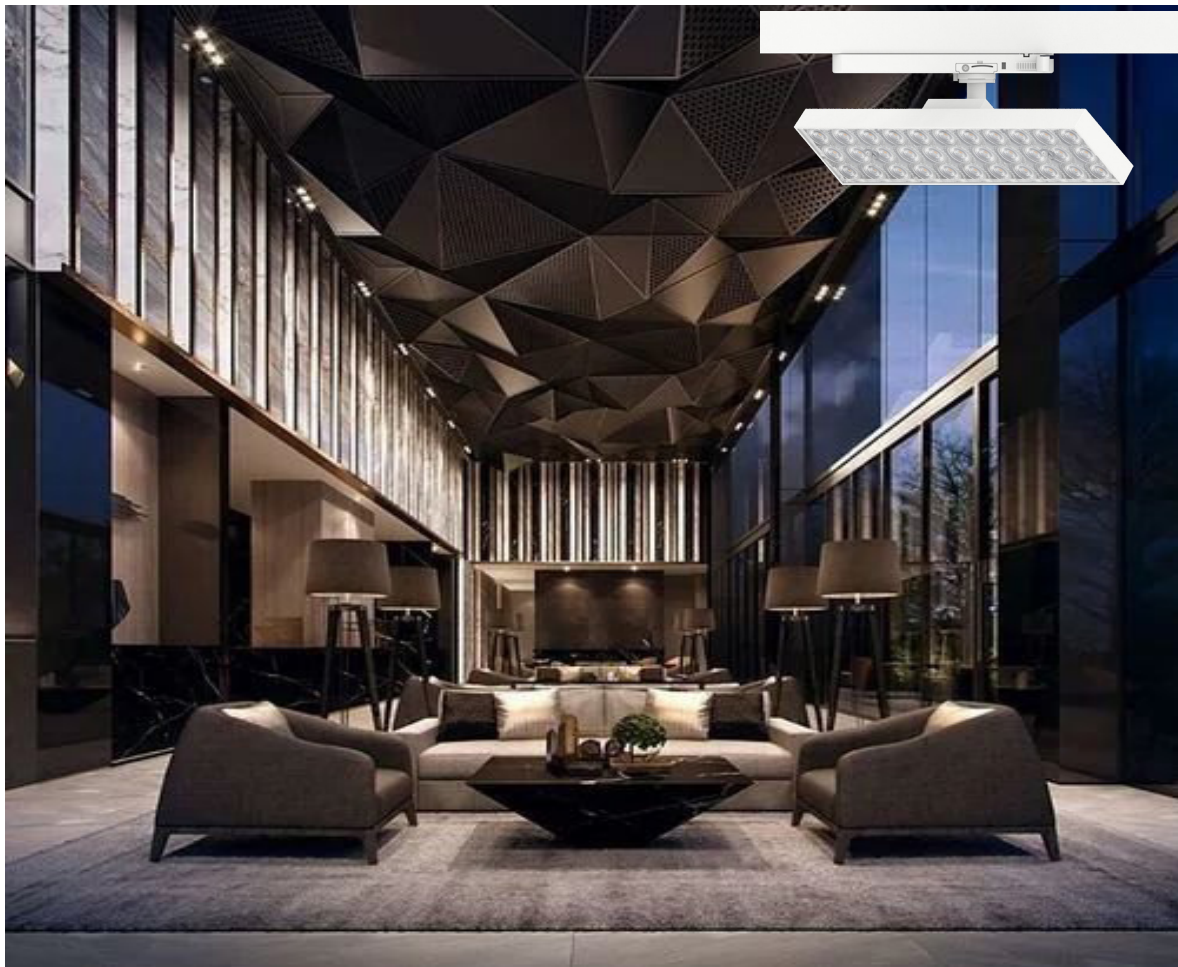**Possible Applications / Aplicaciones posibles Fashion shops, modern offices, hotels,...**

nelux (HK) international,ltd

**CONE SERIES**






CONE - TS88110



CONE - TS100130



CONE - TS113150



**Description**

Aluminium die-casting , electrostatic powder coating . Reflector Aluminum anodized specular silver  
 Input Voltage 220-240V AC 50-60Hz and Multi-voltage  
 Color:White /Black /Grey  
 Power/Voltage 18W, 25W, 32W  
 Beam angle:15°, 30°, 45° - and 32W 12°, 30°, 45°, 55°  
 LED CREE or Philips  
 CCT 3000K, 4000K as standard other CCT available  
 CRI80, and CRI90,92, 97 under demand  
 Driver Integrated Powegear, OSRAM , Global, Philips  
 Warranty :5 years

**Technical Data / Datos técnicos**

Model	CONE series	Working temperature	-20°C +45°C
Light source	COB	Material	Aluminum die-casting
Power	18W, 25W, 32W	Housing colour	White/Black/Grey
Beam angle	15°, 30°, 45°/ 32W 12°, 30°, 45°, 55°	Wiring	Track connector 2 wires/3wires/4 wires
CRI	>80 standard and 90/92/95/97 as option	Dimmable	DALI/0-10V/Triac Dim/2.4G RF
CCT	3000K/4000K	Working life	50000 Hrs
Luminous efficacy	1530lm / 2300lm / 2800lm	Led chip	Osram
Input Voltage	AC200-240V 50/60Hz	Driver	Powergear, Osram, Global, Philips
Output Voltage	-	Installation	Adapter on track or Surface Mounted
Binning initial	-	Warranty	5 Years

**Possible Applications / Aplicaciones posibles** Fashion shops, modern offices



nelux (HK) international,ltd


**CEILA SERIES**

Accessories / Accesorios




18W

CEILA - TS




25W

CEILA - TS



32W

CEILA - TS106123




**Description**

Aluminium die-casting , electrostatic powder coating . Reflector Aluminum anodized specular silver  
 Input Voltage 220-240V AC 50-60Hz and Multi-voltage  
 Color:White /Black /Grey  
 Power/Voltage 18W, 25W, 32W  
 Beam angle:15°, 30°, 45° - and 32W 12°, 30°, 45°, 55°  
 LED CREE or Philips  
 CCT 3000K, 4000K as standard other CCT available  
 CRI80, and CRI90,92, 97 under demand  
 Driver Integrated Powegear, OSRAM , Global, Philips  
 Warranty :5 years

**Technical Data / Datos técnicos**

Model	CEILA series	Working temperature	-20°C +45°C
Light source	COB	Material	Aluminum die-casting
Power	18W, 25W, 32W	Housing colour	White/Black/Grey
Beam angle	15°, 30°, 45/ 32W 12°, 30°, 45°, 55°	Wiring	Track connector 2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	DALI/0-10V/Triac Dim/2.4G RF
CCT	3000K/4000K	Working life	50000 Hrs
Luminous efficacy	1250lm / 1650lm / 1920lm	Led chip	Osram
Input Voltage	AC200-240V 50/60Hz	Driver	Powergear, Osram
Output Voltage	-	Installation	Adapter on track or Surface Mounted

**Possible Applications / Aplicaciones posibles** Fashion shops, modern offices

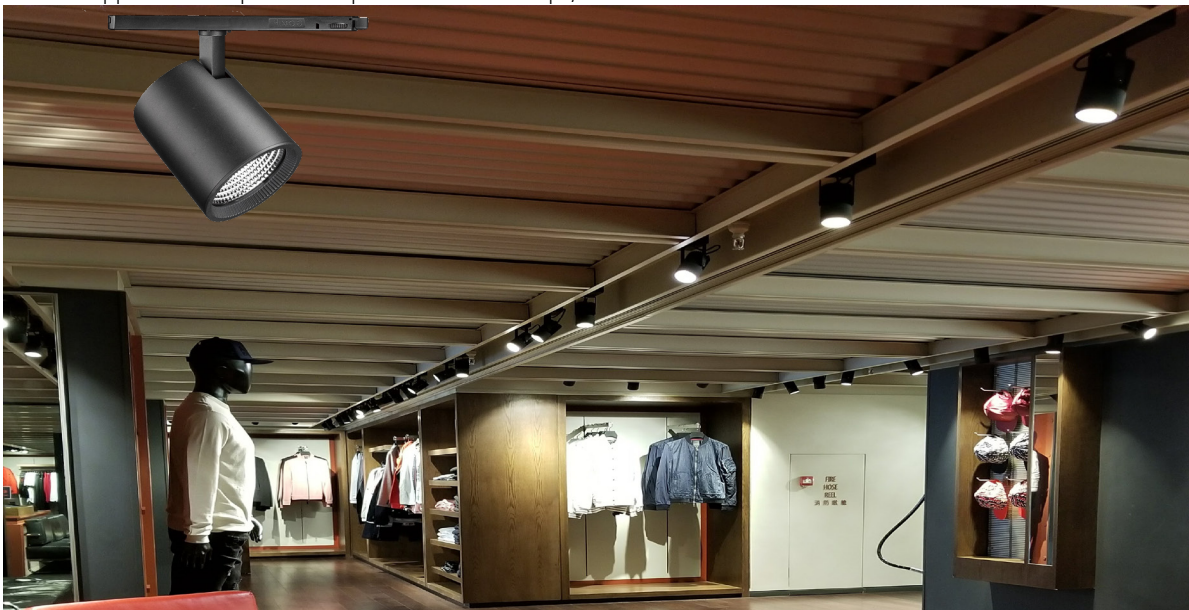


nelux (HK) international,ltd

**PEQUE SERIES**

6W

PEQUE - TS5992

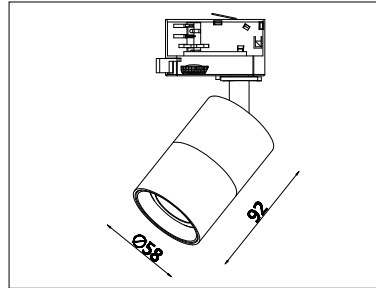**Main Data**

Aluminium die-casting , electrostatic powder coating  
 Led Lens PC  
 Input Voltage 220-240V AC 50-60Hz and Multi-voltage  
 Color:White /Black /Grey  
 Power/Voltage 6W  
 Beam angle: 24°, 36°  
 LED Kangrong  
 CCT 3000K, 4000K as standard other CCT available  
 CRI80, and CRI90,92, 97 under demand  
 Driver Integrated Powegear, OSRAM , ...  
 Warranty :5 years

**Technical Data / Datos técnicos**

Model	PEQUE TS5992	Working temperature	-20°C +45°C
Light source	Led	Material	Aluminum die-casting
Power	6W	Housing colour	White/Black
Beam angle	24°/36°	Wiring	2 wires/3wires/4 wires
CRI	> 80 as standard and 90/92/95/97 as option	Dimmable	On-Off/0-10V
CCT	3000K/4000K	Working life	50000 Hrs
Luminous efficacy	~550lm	Led chip	Kang rong
Input Voltage	AC220-240V 50/60Hz and multivoltage	Driver	/Osram/Khun/Powergear
Output Voltage	-	Installation	Adapter on track
Binning initial	-	Warranty	5 Years

**Description / Descripción**

The main characteristic feature of PEQUE product is its avant-gard design. Integrated driver with a sophisticated thermal management ensuring a long service life. Innovative photometrics , easy adjustment, and good performance are convincing arguments for using in museums, galleries , salesrooms, showrooms. PEQUE is ideal for general lighting in rooms with low ceilings as well as for intensive illumination of walls. It is a wonderful track spot light for creative lighting concepts with a really efficient visual comfort.

Possible Applications / Aplicaciones posibles Fashion shops, modern offices, hotels,...




nelux (HK) international,ltd




**KONIK SERIES**




KONIK - TS88110



KONIK - TS100130



KONIK - TS113150

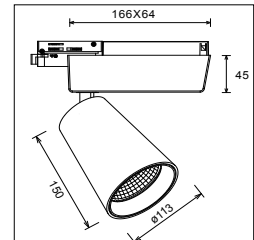

**Description**

Aluminium die-casting , electrostatic powder coating . Reflector Aluminum anodized specular silver  
 Input Voltage 220-240V AC 50-60Hz and Multi-voltage  
 Color:White /Black /Grey  
 Power/Voltage 20W, 28W, 35W, 42W  
 Beam angle:15°, 30°, 45° - and 35W/42W 12°, 30°, 45°, 55°  
 LED CREE, Philips, Citizen  
 CCT 3000K, 4000K as standard other CCT available  
 CRI80, and CRI90,92, 97 under demand  
 Driver Gear box, OSRAM , Tridonic , Philips, Khun  
 Warranty :5 years

**Technical Data / Datos técnicos**

Model	KONIK series	Working temperature	-20°C +45°C
Light source	COB	Material	Aluminum die-casting
Power	20W, 28W, 35W, 42W	Housing colour	White/Black
Beam angle	15°, 30°, 45° and 35W/42W 12°, 30°, 45°, 55°	Wiring	Track connector 2 wires/3wires/4 wires
CRI	CRI>80 and 90/92/95/97 as an option	Dimmable	DALI/0-10V/Triac Dim/2.4G RF
CCT	3000K/4000K	Working life	50000 Hrs
Luminous efficacy	~16600lm/ 2700lm /35000lm/4000lm	Led chip	Cree / Philips
Input Voltage	AC200-240V 50/60Hz and Multi-voltage	Driver	OSRAM , Tridonic , Philips, Khun
Output Voltage	-	Installation	Adapter on track
Binning initial	-	Warranty	5 Years

Possible Applications / Aplicaciones posibles Fashion shops, modern offices



**TUBE SERIES**

TUBE - TS58130 10W







TUBE - TS66135 14W



TUBE - TS73155 20W



TUBE - TS80170 24W

**Description**

Aluminium die-casting , electrostatic powder coating . Reflector Led Lens . Mounting Ring Aluminum Anodizing Coating  
 Input Voltage 220-240V AC 50-60Hz and Multi-voltage  
 Color: White /Black /Grey  
 Power/Voltage 10W, 14W, 20W, 24W  
 Beam angle:10W/ 20', 24', 36' - and - 14W/20W/24W 15', 24', 36'  
 LED CREE, Philips  
 CCT 3000K, 4000K as standard other CCT available  
 CRI80, and CRI90,92, 97 under demand  
 Driver Integrated Tridonic  
 Warranty :5 years

**Technical Data / Datos técnicos**

Model	TUBE series	Working temperature	-20°C +45°C
Light source	COB	Material	Aluminum die-casting
Power	10W, 14W, 20W, 24W	Housing colour	White/Black/Grey
Beam angle	15°, 30°, 45° and 35W/42W 12°, 30°, 45°, 55°	Wiring	Track connector 2 wires/3wires/4 wires
CRI	CRI>80 and 90/92/95/97 as an option	Dimmable	DALI/0-10V/Triac Dim/2.4G RF
CCT	3000K/4000K	Working life	50000 Hrs
Luminous efficacy	~950lm/ ~1310lm / ~2000lm/ ~2300lm	Led chip	Cree / Philips
Input Voltage	AC200-240V 50/60Hz and Multi-voltage	Driver	Tridonic, Khun
Output Voltage	-	Installation	Adapter on track
Binning initial	-	Warranty	5 Years

**Possible Applications / Aplicaciones posibles Fashion shops, modern offices**

nelux (HK) international,ltd

**Thank you for checking our track spot light catalog 2022**

**More products**


[www.nelux.com.hk](http://www.nelux.com.hk)  
[www.valentiae.com](http://www.valentiae.com)  
[www.solucionled.com](http://www.solucionled.com)

Contact us


[sales@nelux.com.hk](mailto:sales@nelux.com.hk)  
whatsapp +852 5349 0724  
wechat neluxury  
skype neluxlightng  
Head Office +852 28600042

**LENIS SERIES**


LENIS - TS60160 17W



LENIS - TS80200 32W



LENIS - TS91215 54W

**Description**

Aluminium die-casting , electrostatic powder coating . Reflector Led Lens .  
 Input Voltage 220-240V AC 50-60Hz and Multi-voltage  
 Color: White /Black /Grey  
 Power/Voltage 17W, 32W, 54W  
 Beam angle:24°, 36°, 54°  
 LED Bridgelux COB  
 CCT 2700K/3000K/4000K/5000K as standard  
 CRI90,92, 97 under demand  
 Driver Non-dimmable, built in side  
 Warranty :5 years

**Technical Data / Datos técnicos**

Model	LENIS series	Working temperature	-20°C +45°C
Light source	COB	Material	Aluminum die-casting
Power	17W, 32W, 54W	Housing colour	White/Black/Grey
Beam angle	24°, 36°, 54°	Wiring	Track connector 4 wires
CRI	CRI90 and 90/92/95/97 as an option	Dimmable	DALI/0-10V/Triac Dim/2.4G RF - optional -
CCT	2700K/3000K/4000K/5000K	Working life	50000 Hrs
Luminous efficacy	~950lm/ ~1310lm / ~2000lm/ ~2300lm	Led chip	Bridgelux
Input Voltage	AC200-240V 50/60Hz and Multi-voltage	Driver	Customised Khun
Output Voltage	-	Installation	Adapter on track
Binning initial	-	Warranty	5 Years

**Possible Applications / Aplicaciones posibles Fashion shops, modern offices**

nelux (HK) international,ltd