

CEILA TRACK SPOT LIGHT SERIES

MODELS TSL85104_18 - TSL95112_25 - TSL106123_32


Light source

CREE and PHILIPS




Driver

TCL and Power



Track Spot Light

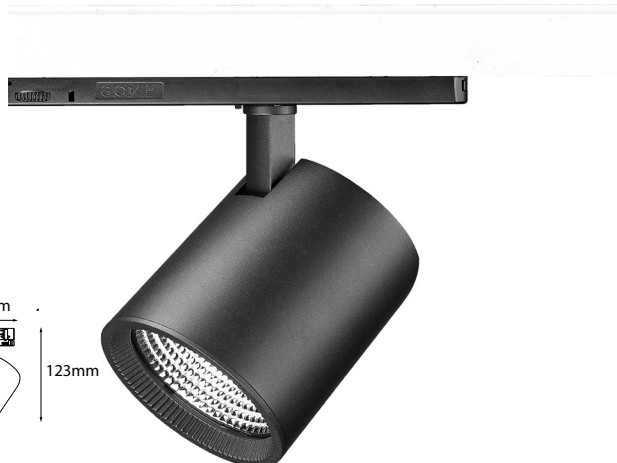

Power range

18W, 25W, 32W

Models

Three references

Product features

Lamp housing Al.electrostatic powder coating
Heat sink Al.electrostatic powder coating
Mounting ring AL anodizing coating
Reflector Al.Anodized specular silver
Installation 3 phase adapter on 3 phase track

Electrical specifications

- * Track in Adapter
- * Rated supply voltage 220-240VAC
- * Optional AC voltage range 120-277V -50/60 Hz

Product dimensions

- * Ref.TSL85104_18 (Ø85mm x L104mm)
- * Ref.TSL95112_25 (Ø95mm x L112mm)
- * Ref.TSL106123_32 (Ø106mm x L123mm)

Driver specifications

- * Track in Adapter LED Driver
- * For luminaires of protection class I and II
- * Up to 90 % efficiency
- * For ambient temperatures up to 60 °C
- * Nominal lifetime up to 50,000 h (at ta 50 °C)
- * 5 years guarantee

Optical specifications

- * Reflector specular
- * Ref.TSL85104_18 Beam angle (12°, 24°, 45°, 55°)
- * Ref.TSL95112_25 Beam angle (15°, 30°, 40°, 55°)
- * Ref.TSL106123_32 Beam angle (15°, 30°, 40°, 60°)

Optional Accessories

Barn door Anti-glare ring Honey comb



CCT range and lumens

- * Power 18W CCT 3000K ... 1500lm
- * Power 18W CCT 4000K ... 1580lm
- * Power 25W CCT 3000K ... 2300lm
- * Power 25W CCT 4000K ... 2400lm
- * Power 32W CCT 3000K ... 2800lm
- * Power 32W CCT 4000K ... 2900lm

CRI > 80 as standard

Mechanical features

- * Rotation 360°
- * Tilttable 90°
- * Adjustable

Ingress protection

IP20

Finished color

White, Black, Grey

Warranty

5 Years

Prices

sales@nelux.com.hk

