

NELUX TRACK SPOTLIGHT

CATALOG 2022



nelux (HK) international,ltd

Track spot light for Museum, Art galleries, Fashion shops,...

SOROLLA series
MUSEUM & GALLERY Track spot light



SOROLLA - A

SOROLLA - B

SOROLLA - C

SOROLLA - D

SOROLLA - E

PINAZO series
MUSEUM & GALLERY Track spot light



PINAZO - A

PINAZO - B

PINAZO - C

PINAZO - D

MAX Z series
MUSEUM & GALLERY Track spot light




MAX Z - A

MAX Z - B

MAX Z - C

MAX Z - D

SUPRA series
MUSEUM & GALLERY Track spot light

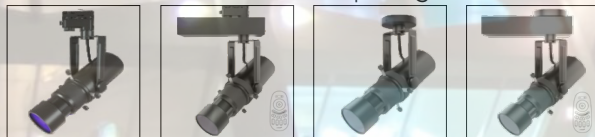

SUPRA - A

SUPRA - B

SUPRA - C

SUPRA - D

BENLLIURE series
MUSEUM & GALLERY Track spot light



BENLLIURE - A

BENLLIURE - B

BENLLIURE - C

BENLLIURE - D

MONGRELL series
MUSEUM & GALLERY Track spot light



MONGRELL-A

MONGRELL-B

MONGRELL-C

MONGRELL-D

Track spot light for Retail shops, Fashion shops, Private houses, Hotels, apartments, modern kitchens,...

MAX H series

DIFFERENT APPLICATIONS Track spot light



MAX H - A



MAX H - B



MAX H - C



MAX H - D

MASK series

RETAIL & FASHION SHOP Track spot light



MASK

ZOOM series


RETAIL & FASHION SHOP Track spot light




TS85120



TS85265



TS71134



TS85152



TS95158

DOTTY series

RETAIL & FASHION SHOP Track spot light



TS12097




TS13894



TS180100

PLANE series

RETAIL & FASHION SHOP Track spot light



TS29166

CONE series

RETAIL & FASHION SHOP Track spot light



TS88110



TS100130



TS113150

CEILA series

RETAIL & FASHION SHOP Track spot light



TS85104



TS95112



TS106123

Track spot light for Retail shops, Fashion shops, Private houses, Hotels, apartments, modern kitchens,...

PEQUE series

HOME application -Track spot light




PEQUE 6W

KONIK series

RETAIL SHOPS application -Track spot light



KONIK-TS88110 20W




KONIK-TS100130 28W



KONIK-TS113150 35W-42W

TUBE series

RETAIL SHOPS & HOME application -Track spot light



TUBE-TS58130 10W





TUBE-TS66135 14W



TUBE-TS73155 20W



TUBE-TS80170 24W

SOROLLA SERIES

Accessories / Accesorios




Technical Data / Datos técnicos


Model	SOROLLA-A	Working temperature	-20°C +45°C
Light source	CCT adjust	Material	Aluminum
Power	20W/25W	Housing colour	White/Black/White Oak/Red Oak/Walnut
Beam angle	15°/24°/36°/60°	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K/5000K/5700K	Working life	50000 Hrs
Luminous efficacy	100-120lm/W	Led chip	Citizen/Osram/Cree/Evercore
Input Voltage	AC220-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips/Lifud
Output Voltage	DC36V	Installation	Adapter on track
Binning initial	< 3 MacAdam	Warranty	5 Years

Packaging / Embalaje

N.W. Peso Neto ... 0.89Kg

G.W. Peso Bruto 1.01Kg/Box
Size 125 x115 x210mmG.W. Peso Bruto 11.02Kg/CTN - 10pcs/CTN
Size 600 x265 x235mm

Accessories / Accesorios

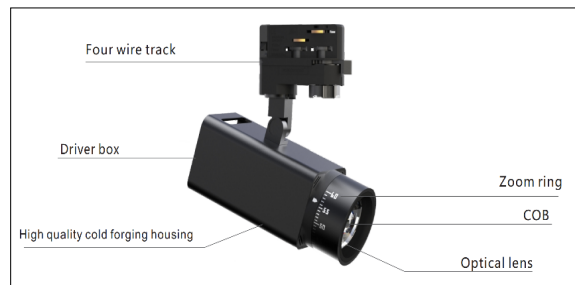


Technical Data / Datos técnicos

Model	SOROLLA-B	Working temperature	-20°C +45°C
Light source	CCT adjust	Material	Aluminum
Power	20W/25W	Housing colour	White/Black/White Oak/Red Oak/Walnut
Beam angle	10°~60°	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K/5000K/5700K	Working life	50000 Hrs
Luminous efficacy	100-120lm/W	Led chip	Citizen/Osram/Cree/Evercore
Input Voltage	AC220-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips/Lifud
Output Voltage	DC36V	Installation	Adapter on track
Binning initial	< 3 MacAdam	Warranty	5 Years

Packaging / Embalaje

N.W. Peso Neto ... 0.995Kg

G.W. Peso Bruto 1.15Kg/Box
Size 125 x115 x210mmG.W. Peso Bruto 12.7Kg/CTN - 10pcs/CTN
Size 600 x265 x235mm

SOROLLA SERIES**Accessories / Accesorios**


Honeycomb Barndoor Antiglare Wallwasher

**Technical Data / Datos técnicos**

Model	SOROLLA-C	Working temperature	-20°C +45°C
Light source	CCT adjust	Material	Cold Forging+PC94V0
Power	20W/25W	Housing colour	White/Black/White Oak/Red Oak/Walnut
Beam angle	12°/15°/22°/24°/40°/60°	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K/5000K/5700K	Working life	50000 Hrs
Luminous efficacy	100-120lm/W	Led chip	Citizen/Osram/Cree/Evercore
Input Voltage	AC220-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips/Lifud
Output Voltage	DC36V	Installation	Adapter on track
Binning initial	< 3 MacAdam	Warranty	5 Years

Packaging / Embalaje

N.W. Peso Neto ... 0.95Kg

G.W. Peso Bruto 1.02Kg/Box
Size 125 x115 x210mmG.W. Peso Bruto 11.5Kg/CTN - 10pcs/CTN
Size 600 x265 x235mm**Accessories / Accesorios**

Honeycomb Barndoor Antiglare Wallwasher

**Technical Data / Datos técnicos**



Model	SOROLLA-D	Working temperature	-20°C +45°C
Light source	CCT adjust	Material	Aluminum
Power	20W/25W	Housing colour	White/Black/White Oak/Red Oak/Walnut
Beam angle	5°~60° zoomable	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K/5000K/5700K	Working life	50000 Hrs
Luminous efficacy	100-120lm/W	Led chip	Citizen/Osram/Cree/Evercore
Input Voltage	AC220-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips/Lifud
Output Voltage	DC36V	Installation	Adapter on track
Binning initial	< 3 MacAdam	Warranty	5 Years

Packaging / Embalaje

N.W. Peso Neto ... 1.1095Kg

G.W. Peso Bruto 1.20Kg/Box
Size 125 x115 x210mmG.W. Peso Bruto 12.5Kg/CTN - 10pcs/CTN
Size 600 x265 x235mm

SOROLLA SERIES

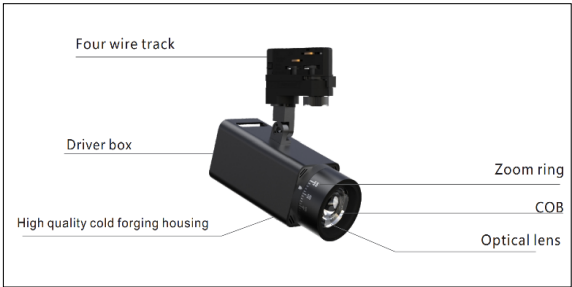

Technical Data / Datos técnicos

Model	SOROLLA-E	Working temperature	-20°C +45°C
Light source	CCT adjust	Material	Aluminum
Power	20W/25W	Housing colour	White/Black/White Oak/Red Oak/Walnut
Beam angle	12°-70°	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K/5000K/5700K	Working life	50000 Hrs
Luminous efficacy	100-120lm/W	Led chip	Citizen/Osram/Cree/Evercore
Input Voltage	AC220-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips/Lifud
Output Voltage	DC36V	Installation	Adapter on track
Binning initial	< 3 MacAdam	Warranty	5 Years

Packaging / Embalaje

N.W. Peso Neto ... 1.02Kg





G.W. Peso Bruto 1.17Kg/Box
Size 125 x115 x210mm



G.W. Peso Bruto 12.9Kg/CTN - 10pcs/CTN
Size 600 x265 x235mm

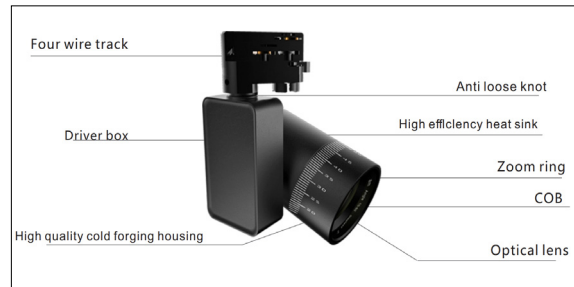



PINAZO SERIES**Technical Data / Datos técnicos**

Model	PINAZO-A	Working temperature	-20°C +45°C
Light source	CCT adjust	Material	Cold Forging+PC94V0
Power	30W/35W	Housing colour	White/Black/White Oak/Red Oak/Walnut
Beam angle	10°-60°	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K/5000K/5700K	Working life	50000 Hrs
Luminous efficacy	100-120lm/W	Led chip	Citizen/Osram/Cree/Evercore
Input Voltage	AC220-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips/Lifud
Output Voltage	DC36V	Installation	Adapter on track
Binning initial	< 3 MacAdam	Warranty	5 Years

Packaging / Embalaje

N.W. Peso Neto ... 1.15Kg

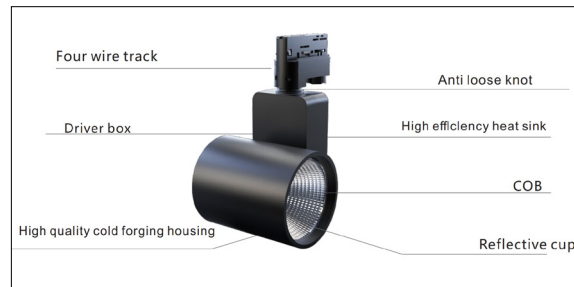

G.W. Peso Bruto 1.26Kg/Box
Size 170 x135 x230mmG.W. Peso Bruto 13.7Kg/CTN - 10pcs/CTN
Size 690 x360 x255mm**Technical Data / Datos técnicos**

Model	PINAZO-B	Working temperature	-20°C +45°C
Light source	CCT adjust	Material	Aluminum
Power	30W/35W	Housing colour	White/Black/White Oak/Red Oak/Walnut
Beam angle	12°/24°/36°/60°	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K/5000K/5700K	Working life	50000 Hrs
Luminous efficacy	100-120lm/W	Led chip	Citizen/Osram/Cree/Evercore
Input Voltage	AC220-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips/Lifud
Output Voltage	DC36V	Installation	Adapter on track
Binning initial	< 3 MacAdam	Warranty	5 Years

Packaging / Embalaje

N.W. Peso Neto ... 0.92Kg





G.W. Peso Bruto 1.03Kg/Box
Size 170 x135 x230mmG.W. Peso Bruto 11.5Kg/CTN - 10pcs/CTN
Size 690 x360 x255mm

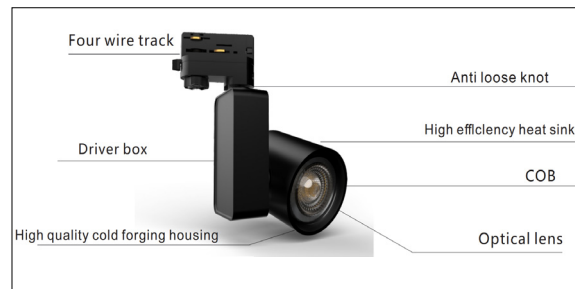PINAZO SERIES**Accessories / Accesorios****Optional colors / Colores****Technical Data / Datos técnicos**

Model	PINAZO-C	Working temperature	-20°C +45°C
Light source	CCT adjust	Material	Cold Forging+PC94V0
Power	30W/35W	Housing colour	White/Black/White Oak/Red Oak/Walnut
Beam angle	12°/22°/38°/60°	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K/5000K/5700K	Working life	50000 Hrs
Luminous efficacy	100-120lm/W	Led chip	Citizen/Osram/Cree/Evercore
Input Voltage	AC220-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips/Lifud
Output Voltage	DC36V	Installation	Adapter on track
Binning initial	< 3 MacAdam	Warranty	5 Years

Packaging / Embalaje

N.W. Peso Neto ... 0.93Kg

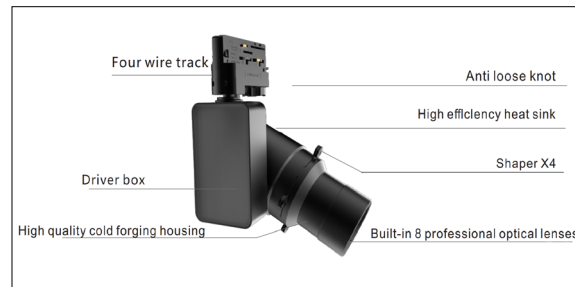
G.W. Peso Bruto 1.04Kg/Box
Size 170 x135 x230mmG.W. Peso Bruto 11.5Kg/CTN - 10pcs/CTN
Size 690 x360 x255mm**Accessories / Accesorios****Technical Data / Datos técnicos**

Model	PINAZO-D	Working temperature	-20°C +45°C
Light source	CCT adjust	Material	Aluminum
Power	30W/35W	Housing colour	White/Black/White Oak/Red Oak/Walnut
Beam angle	5°~60° zoomable	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K/5000K/5700K	Working life	50000 Hrs
Luminous efficacy	100-120lm/W	Led chip	Citizen/Osram/Cree/Evercore
Input Voltage	AC220-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips/Lifud
Output Voltage	DC36V	Installation	Adapter on track
Binning initial	< 3 MacAdam	Warranty	5 Years

Packaging / Embalaje

N.W. Peso Neto ... 1.85Kg

G.W. Peso Bruto 2.1Kg/Box
Size 230 x225 x175mmG.W. Peso Bruto 13.8Kg/CTN - 10pcs/CTN
Size 695 x250 x290mm

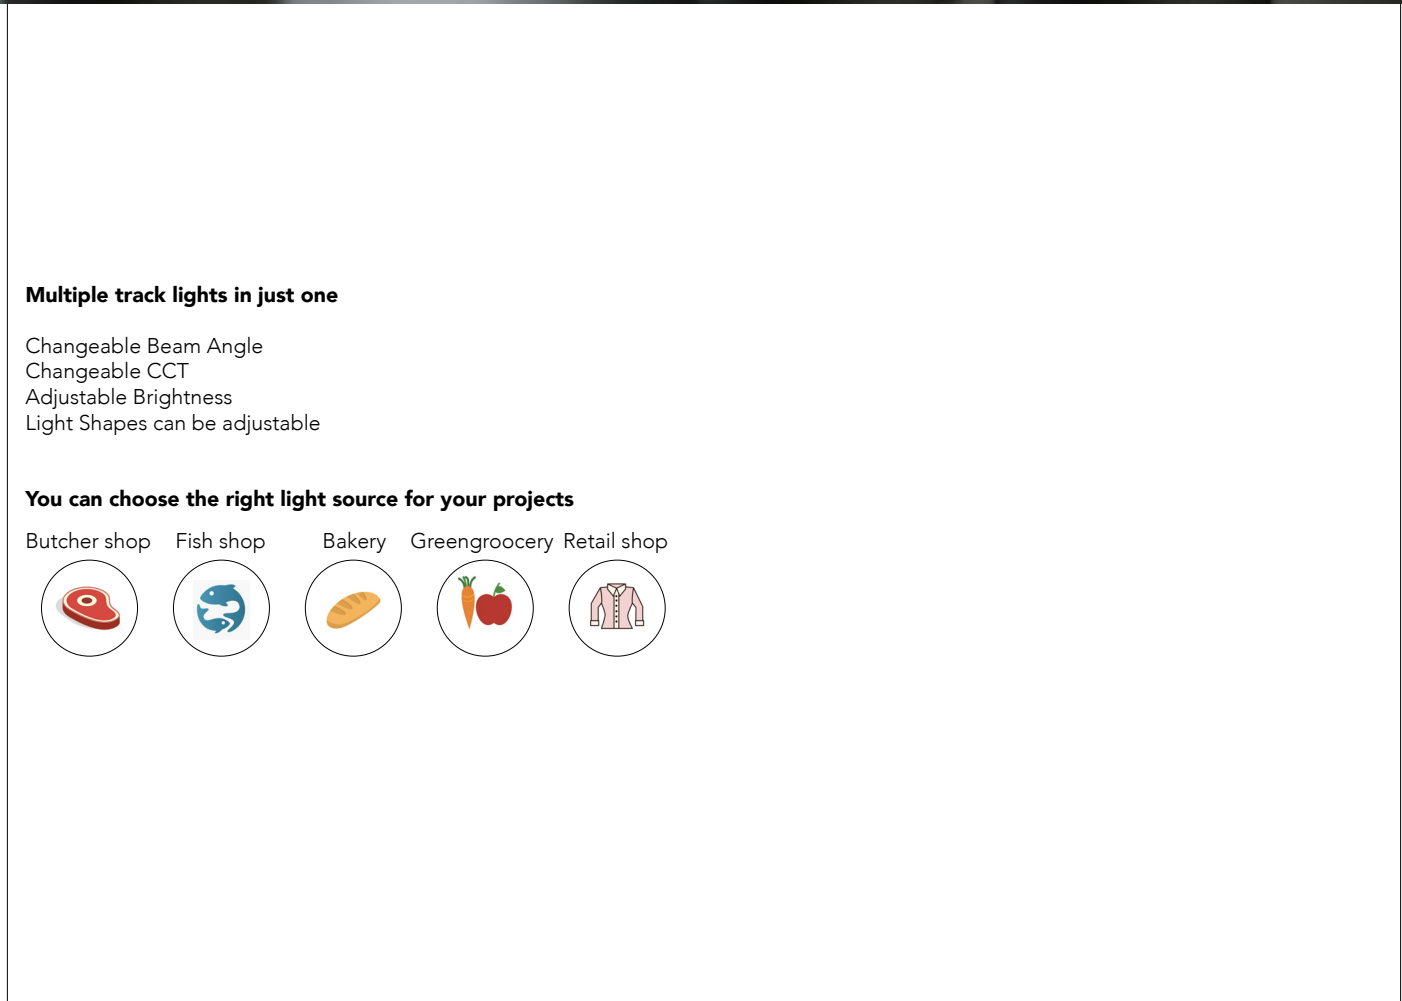

Changeable Beam Angle

- Changeable CCT
- Adjustable Brightness
- Light Shapes can be adjustable

Butcher shop Fish shop Bakery Greengrocery R





MAX H SERIES

TRACK ADAPTOR




MAX H - A



TRACK ADAPTOR




MAX H - B



TRACK ADAPTOR




MAX H - C



SURFACE MOUNTED



MAX H - D



Accessories / Accesorios



Technical Data / Datos técnicos

Model	MAXH	Working temperature	-20°C +45°C
Light source	CCT adjust	Material	Aluminum
Power	20W/30W	Housing colour	White/Black
Beam angle	12°/24°/38°/60°/10°-60°	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim
CCT	2700K/3000K/4000K/5000K/5700K	Working life	50000 Hrs
Luminous efficacy	90-100lm/W	Led chip	Citizen/Osram/Cree
Input Voltage	AC220-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips
Output Voltage	DC36V	Installation	Adapter on track or Surface Mounted
Binning initial	< 3 MacAdam	Warranty	5 Years





MAX Z SERIES

TRACK ADAPTOR



MAX Z - A



Red

Orange

Yellow

Green

Cyan


Blue

Purple

TRACK ADAPTOR




MAX Z - B



TRACK ADAPTOR




MAX Z - C



SURFACE MOUNTED



MAX Z - D



Different Shapes



Technical Data / Datos técnicos

Model	MAX-Z	Working temperature	-20°C +45°C
Light source	CCT adjust	Material	Aluminum
Power	20W/30W	Housing colour	White/Black
Beam angle	10°-60°	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim
CCT	2700K/3000K/4000K/5000K/5700K	Working life	50000 Hrs
Luminous efficacy	70lm/W	Led chip	Citizen/Osram/Cree
Input Voltage	AC220-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips
Output Voltage	DC36V	Installation	Adapter on track or Surface Mounted
Binning initial	< 3 MacAdam	Warranty	5 Years

Different Applications




SUPRA SERIES

TRACK ADAPTOR



SUPRA-A




On-Off / 0-10V dimmable

TRACK ADAPTOR



SUPRA-B




DALI/Triac/2.4G RF dimmable

SURFACE MOUNTED



SUPRA-C-SM




On-Off / 0-10V dimmable



SURFACE MOUNTED




SUPRA-D-SM



DALI/Triac/2.4G RF dimmable



Different Shapes



Technical Data / Datos técnicos

Model	SUPRA	Working temperature	-20°C +45°C
Light source	COB	Material	Aluminum
Power	25W 30W 35W	Housing colour	White/Black
Beam angle	5°-60° ZOOMABLE	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	DALI/0-10V/Triac Dim/2.4G RF
CCT	2700K/3000K/4000K/5000K/RGBW	Working life	50000 Hrs
Luminous efficacy	1250lm / 1500lm / 1750lm	Led chip	Citizen/Osram/Cree
Input Voltage	AC200-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips
Output Voltage	DC36V	Installation	Adapter on track or Surface Mounted
Binning initial	< 3 MacAdam	Warranty	5 Years

Different Applications Museum, Art gallery, Showrooms,...




BENLLIURE SERIES

TRACK ADAPTOR



BENLLIURE-A




On-Off / 0-10V dimmable

TRACK ADAPTOR



BENLLIURE-B




DALI/Triac/2.4G RF dimmable

SURFACE MOUNTED



BENLLIURE-C-SM




On-Off / 0-10V dimmable



SURFACE MOUNTED



BENLLIURE-D-SM



DALI/Triac/2.4G RF dimmable



Red

Orange

Yellow


Green

Cyan

Blue

Purple

Different Shapes



Technical Data / Datos técnicos

Model	BENLLIURE	Working temperature	-20°C +45°C
Light source	COB	Material	Aluminum
Power	20W 30W	Housing colour	White/Black
Beam angle	20°- 60° ZOOMABLE	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	DALI/0-10V/Triac Dim/2.4G RF
CCT	2700K/3000K/4000K/5000K/RGBW	Working life	50000 Hrs
Luminous efficacy	1000lm / 1500lm	Led chip	Citizen/Osram/Cree
Input Voltage	AC200-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips
Output Voltage	DC36V	Installation	Adapter on track or Surface Mounted
Binning initial	< 3 MacAdam	Warranty	5 Years






Different Applications Museum, Art gallery, Showrooms,...



MONGRELL SERIES




MONGRELL-A



TRACK ADAPTOR On-Off and TRIAC dimmable



MONGRELL-B






TRACK ADAPTOR DALI/0-10V/2.4G RF dimmable

20W






MONGRELL-C





SURFACE MOUNTED On-Off and TRIAC dimmable




MONGRELL-D



SURFACE MOUNTED DALI/0-10V/2.4G RF dimmable



Different Shapes





Different Shapes and colors



Technical Data / Datos técnicos

Model	MONGRELL	Working temperature	-20°C +45°C
Light source	COB	Material	Aluminum
Power	10W 15W 20W	Housing colour	White/Black
Beam angle	40°	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	DALI/0-10V/Triac Dim/2.4G RF
CCT	2700K/3000K/4000K/5000K/RGBW	Working life	50000 Hrs
Luminous efficacy	500lm / 750lm / 1000lm	Led chip	Citizen/Osram/Cree
Input Voltage	AC200-240V 50/60Hz	Driver	Tridonic/Osram/Khun/Philips
Output Voltage	DC36V	Installation	Adapter on track or Surface Mounted
Binning initial	< 3 MacAdam	Warranty	5 Years

MASK SERIES

Accessories / Accesorios



Technical Data / Datos técnicos

Model	MASK	Working temperature	-20°C +45°C
Light source	SMD5050	Material	Aluminum
Power	30W	Housing colour	White/Black
Beam angle	15°/24°/38°/50°/50x50°/35x75°	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	On-Off/0-10V
CCT	2700K/3000K/4000K/5000K/6000K	Working life	50000 Hrs
Luminous efficacy	80lm/W	Led chip	Citizen/Osram
Input Voltage	AC220-240V 50/60Hz	Driver	/Osram/Khun/Philips
Output Voltage	DC36V	Installation	Adapter on track
Binning initial	< 3 MacAdam	Warranty	5 Years

Packaging / Embalaje

N.W. Peso Neto ... 2.0Kg



G.W. Peso Bruto 2.1Kg/Box




G.W. Peso Bruto 22.7Kg/CTN - 10pcs/CTN

Description / Descripción

The main characteristic feature of MASK product is its avant-gard design. Housing integrates the control gear, with a sophisticated thermal management ensuring a long service life. Innovative photometrics, easy adjustment, and good performance are convincing arguments for using in museums, galleries, salesrooms, show-rooms. Mask is ideal for accent lighting across large distances in rooms with high ceilings as well as for intensive illumination of walls. It is a wonderful track spot light for creative lighting concepts with a really efficient visual comfort.

Beam angle shapes

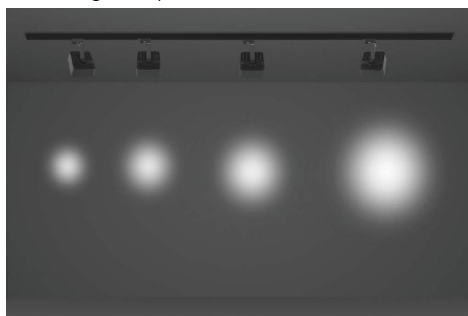

Back side




Beam angle shapes



Possible Applications / Aplicaciones posibles Fashion shops, modern offices




nelux (HK) international,ltd

ZOOM SERIES**Description**

Aluminium die-casting , electrostatic powder coating . Housing with lens
 Color:White /Black /Grey
 Power/Voltage 10W, 20W
 Beam angle:6°-60°
 LED Citizen CLU711 1204C4 or Lumileds 1204
 HD 2700K, 3000K, 4000K
 CRI80, and CRI90,92, 97 under demand
 Driver Integrated allooking alw20-40050TK (1-10V DIM)
 Warranty :5 years

**Technical Data / Datos técnicos**

Model	ZOOM-Z12085	Working temperature	-20°C +45°C
Light source	Citizen	Material	Alumimum die-casting
Power	10W/20W	Housing colour	White/Black/Grey
Beam angle	6°~60°	Wiring	2 wires/3wires/4 wires
CRI	80/90/92/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K	Working life	50000 Hrs
Luminous efficacy	400~920lm	Led chip	Citizen/Lumileds
Input Voltage	AC220-240V 50/60Hz	Driver	Allooking
Output Voltage	-	Installation	Adapter driver on track
Binning initial	-	Warranty	5 Years

**Description**

Aluminium die-casting , electrostatic powder coating . Housing with lens
 Color:White /Black /Grey
 Power/Voltage 25W
 Beam angle:6°-60°
 LED Citizen CLU711 1204C4 or Lumileds 1204
 HD 2700K, 3000K, 4000K
 CRI80, and CRI90,92, 97 under demand
 Driver Integrated allooking alw20-40050TK (1-10V DIM)
 Warranty :5 years


**Technical Data / Datos técnicos**

Model	ZOOM-Z85265	Working temperature	-20°C +45°C
Light source	CCT adjust	Material	Aluminum die-casting
Power	25W	Housing colour	White/Black/Grey
Beam angle	6°~60° zoomable	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K	Working life	50000 Hrs
Luminous efficacy	1010lm	Led chip	Citizen/Lumileds
Input Voltage	AC220-240V 50/60Hz	Driver	Allooking
Output Voltage	-	Installation	Adapter driver on track
Binning initial	-	Warranty	5 Years

Possible Applications / Aplicaciones posibles Fashion shops, modern offices





nelux (HK) international,ltd

ZOOM SERIES**Description**

Aluminium die-casting , electrostatic powder coating . Housing with lens
 Input Voltage 220-240V AC 50-60Hz
 Color:White /Black /Grey
 Power/Voltage 20W
 Beam angle:15°-45°
 LED LUMILEDS
 CCT 2700K, 3000K, 4000K
 CRI80, and CRI90,92, 97 under demand
 Driver PHILIPS, OSRAM , TRIDONIC
 Warranty :5 years

**Technical Data / Datos técnicos**

Model	ZOOM-Z71134	Working temperature	-15°C +35°C
Light source	Lumiled	Material	Alumimum die-casting
Power	20W	Housing colour	White/Black/Grey
Beam angle	15°~45°	Wiring	2 wires/3wires/4 wires
CRI	80/90/92/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K	Working life	50000 Hrs
Luminous efficacy	1550~1870lm	Optic	led lens
Input Voltage	AC220-240V 50/60Hz	Driver	Philips, Osram, Tridonic
Output Voltage	-	Installation	Adapter driver on track
Binning initial	-	Warranty	5 Years

**Description**

Aluminium die-casting , electrostatic powder coating . Housing with lens
 Input Voltage 220-240V AC 50-60Hz
 Color:White /Black /Grey
 Power/Voltage 28W
 Beam angle:15°-65°
 LED LUMILEDS
 CCT 2700K, 3000K, 4000K
 CRI80, and CRI90,92, 97 under demand
 Driver PHILIPS, OSRAM , TRIDONIC
 Warranty :5 years


**Technical Data / Datos técnicos**

Model	ZOOM-Z85152	Working temperature	-15°C +35°C
Light source	Lumiled	Material	Aluminum die-casting
Power	28W	Housing colour	White/Black/Grey
Beam angle	15°~60° zoomable	Wiring	2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K	Working life	50000 Hrs
Luminous efficacy	2290~3040lm	Optic	Led lens
Input Voltage	AC220-240V 50/60Hz	Driver	Philips, Osram, Tridonic
Output Voltage	-	Installation	Adapter driver on track
Binning initial	-	Warranty	5 Years

Possible Applications / Aplicaciones posibles Fashion shops, modern offices



nelux (HK) international,ltd

ZOOM SERIES**Description**

Aluminium die-casting , electrostatic powder coating . Housing with lens
 Input Voltage 220-240V AC 50-60Hz
 Color:White /Black /Grey
 Power/Voltage 35W
 Beam angle:15°-60°
 LED LUMILEDS
 CCT 2700K, 3000K, 4000K
 CRI80, and CRI90,92, 97 under demand
 Driver PHILIPS, OSRAM , TRIDONIC
 Warranty :5 years

**Technical Data / Datos técnicos**

Model	ZOOM-Z85158	Working temperature	-15°C +35°C
Light source	Lumiled	Material	Alumimum die-casting
Power	35W	Housing colour	White/Black/Grey
Beam angle	15°~60°	Wiring	2 wires/3wires/4 wires
CRI	80/90/92/97	Dimmable	Standard/0-10V/Triac Dim/Dali/Tuya/Casambi
CCT	2700K/3000K/4000K	Working life	50000 Hrs
Luminous efficacy	2700~3230lm	Optic	led lens
Input Voltage	AC220-240V 50/60Hz	Driver	Philips, Osram, Tridonic
Output Voltage	-	Installation	Adapter driver on track
Binning initial	-	Warranty	5 Years

Possible Applications / Aplicaciones posibles Fashion shops, modern offices



nelux (HK) international,ltd

DOTTY SERIES




DOTTY - TS12097



DOTTY - TS13894




DOTTY - TS180100

**Description**

Aluminium die-casting , electrostatic powder coating . Reflector PC
 Input Voltage 220-240V AC 50-60Hz and Multi-voltage
 Color:White /Black /Grey
 Power/Voltage 18W, 24W, 28W
 Beam angle:15°, 35°, 45°
 LED Osram
 CCT 3000K, 4000K as standard other CCT available
 CRI80, and CRI90,92, 97 under demand
 Driver Integrated Powegear, OSRAM ,
 Warranty :5 years

Technical Data / Datos técnicos


Model	DOTTY series	Working temperature	-20°C +45°C
Light source	COB	Material	Aluminum die-casting
Power	18W, 24W, 28W	Housing colour	White/Black/Grey
Beam angle	15°, 35°, 45°	Wiring	Track connector 2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	DALI/0-10V/Triac Dim/2.4G RF
CCT	3000K/4000K	Working life	50000 Hrs
Luminous efficacy	1250lm / 1650lm / 1920lm	Led chip	Osram
Input Voltage	AC200-240V 50/60Hz	Driver	Powegear, Osram
Output Voltage	-	Installation	Adapter on track or Surface Mounted
Binning initial	-	Warranty	5 Years

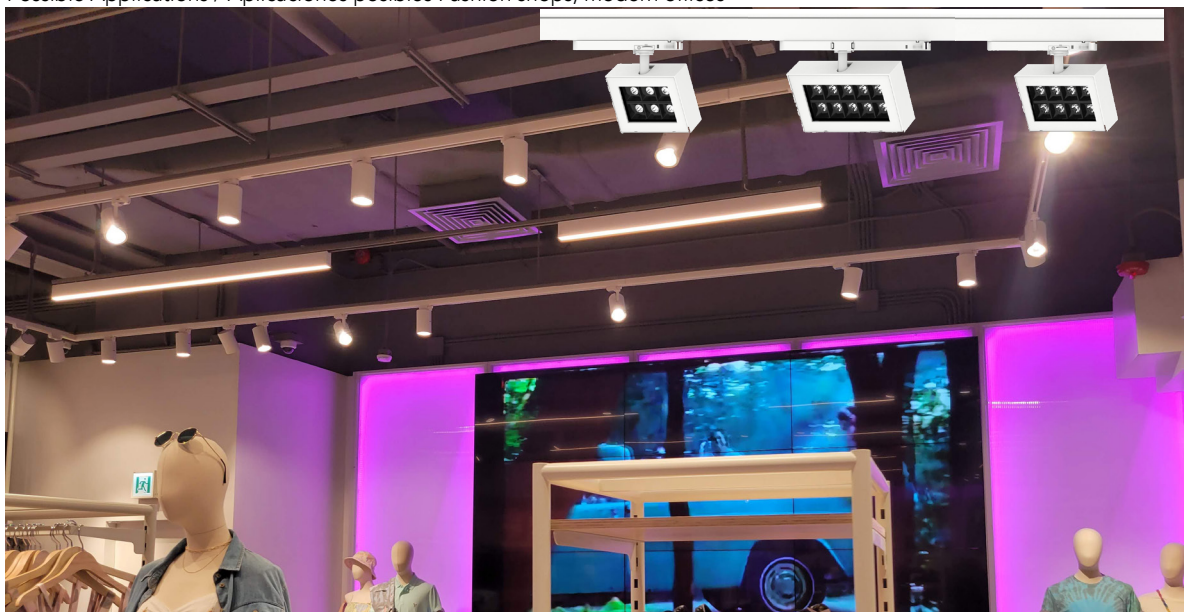Possible Applications / Aplicaciones posibles Fashion shops, modern offices

nelux (HK) international,ltd

PLANE SERIES

PLANE - TS291166

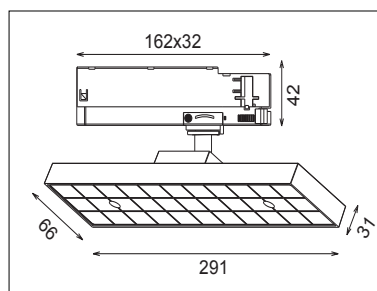**Main Data**


Aluminium die-casting , electrostatic powder coating . Led
 Lens PC
 Input Voltage 220-240V AC 50-60Hz and Multi-voltage
 Color:White /Black /Grey
 Power/Voltage 18W, 24W, 28W
 Beam angle:30°, 60°, 90°
 LED Bridgelux
 CCT 3000K, 4000K as standard other CCT available
 CRI80, and CRI90,92, 97 under demand
 Driver Integrated Powegear, OSRAM ,
 Warranty :5 years

Technical Data / Datos técnicos

Model	PLANE TS29166	Working temperature	-20°C +45°C
Light source	Led	Material	Aluminum die-casting
Power	20W	Housing colour	White/Black
Beam angle	30°/60°/90°	Wiring	2 wires/3wires/4 wires
CRI	> 80 as standard and 90/92/95/97 as option	Dimmable	On-Off/0-10V
CCT	3000K/4000K	Working life	50000 Hrs
Luminous efficacy	2100lm	Led chip	Bridgelux
Input Voltage	AC220-240V 50/60Hz	Driver	/Osram/Khun/Powergear
Output Voltage	-	Installation	Adapter on track
Binning initial	-	Warranty	5 Years

Description / Descripción

The main characteristic feature of PLANE product is its avant-gard design. Integrated driver with a sophisticated thermal management ensuring a long service life. Innovative photometrics , easy adjustment, and good performance are convincing arguments for using in museums, galleries , salesrooms, showrooms. PLANE is ideal for general lighting in rooms with high ceilings as well as for intensive illumination of walls. It is a wonderful track spot light for creative lighting concepts with a really efficient visual comfort.

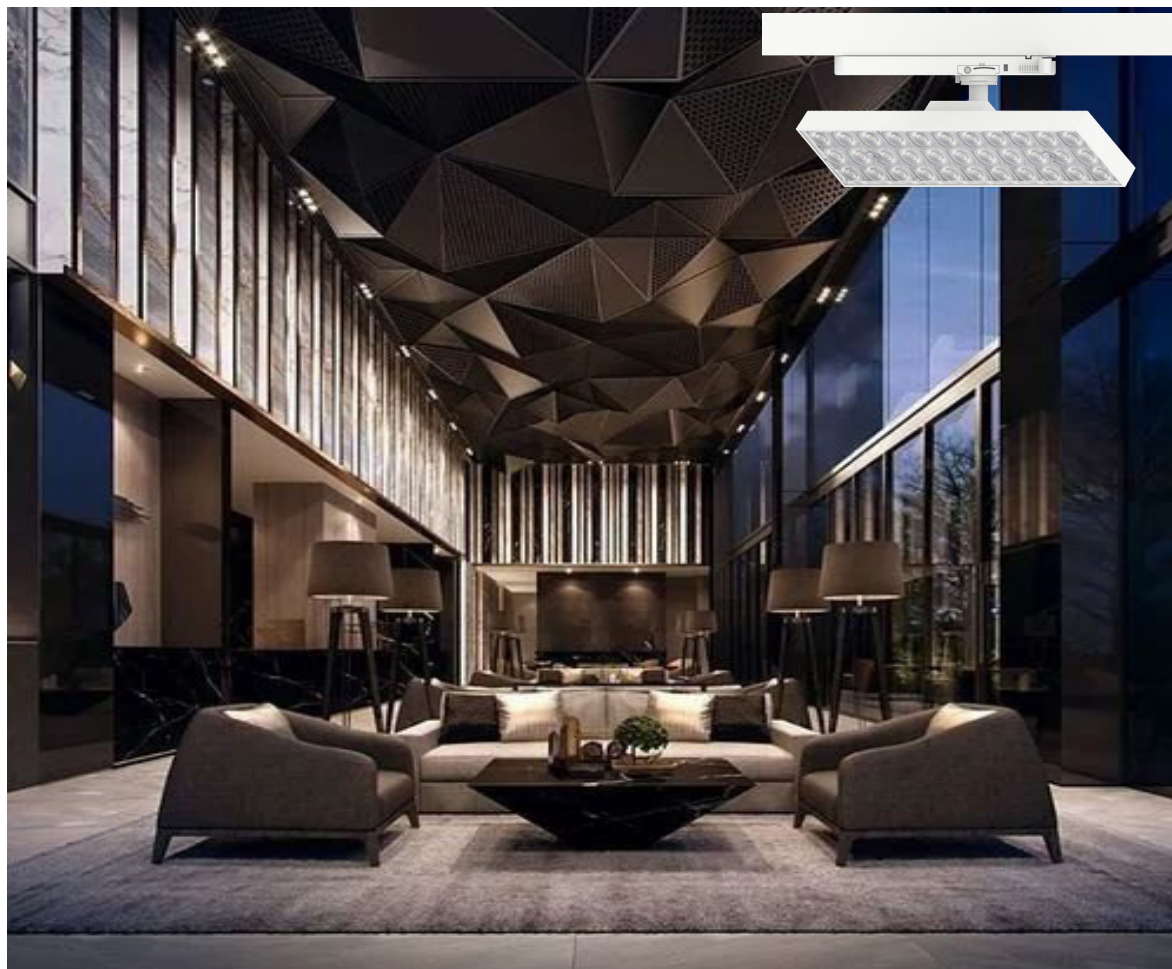Possible Applications / Aplicaciones posibles Fashion shops, modern offices, hotels,...

nelux (HK) international,ltd

CONE SERIES




CONE - TS88110



CONE - TS100130



CONE - TS113150

**Description**

Aluminium die-casting, electrostatic powder coating. Reflector Aluminum anodized specular silver
 Input Voltage 220-240V AC 50-60Hz and Multi-voltage
 Color: White / Black / Grey
 Power/Voltage 18W, 25W, 32W
 Beam angle: 15°, 30°, 45° - and 32W 12°, 30°, 45°, 55°
 LED CREE or Philips
 CCT 3000K, 4000K as standard other CCT available
 CRI80, and CRI90,92, 97 under demand
 Driver Integrated Powegear, OSRAM, Global, Philips
 Warranty :5 years

Technical Data / Datos técnicos

Model	CONE series	Working temperature	-20°C +45°C
Light source	COB	Material	Aluminum die-casting
Power	18W, 25W, 32W	Housing colour	White/Black/Grey
Beam angle	15°, 30°, 45°/ 32W 12°, 30°, 45°, 55°	Wiring	Track connector 2 wires/3wires/4 wires
CRI	>80 standard and 90/92/95/97 as option	Dimmable	DALI/0-10V/Triac Dim/2.4G RF
CCT	3000K/4000K	Working life	50000 Hrs
Luminous efficacy	1530lm / 2300lm / 2800lm	Led chip	Osram
Input Voltage	AC200-240V 50/60Hz	Driver	Powergear, Osram, Global, Philips
Output Voltage	-	Installation	Adapter on track or Surface Mounted
Binning initial	-	Warranty	5 Years

Possible Applications / Aplicaciones posibles Fashion shops, modern offices



nelux (HK) international,ltd


CEILA SERIES

Accessories / Accesorios




18W

CEILA - TS




25W

CEILA - TS



32W


CEILA - TS106123

**Description**

Aluminium die-casting , electrostatic powder coating . Reflector Aluminum anodized specular silver
 Input Voltage 220-240V AC 50-60Hz and Multi-voltage
 Color:White /Black /Grey
 Power/Voltage 18W, 25W, 32W
 Beam angle:15°, 30°, 45° - and 32W 12°, 30°, 45°, 55°
 LED CREE or Philips
 CCT 3000K, 4000K as standard other CCT available
 CRI80, and CRI90,92, 97 under demand
 Driver Integrated Powegear, OSRAM , Global, Philips
 Warranty :5 years

Technical Data / Datos técnicos

Model	CEILA series	Working temperature	-20°C +45°C
Light source	COB	Material	Aluminum die-casting
Power	18W, 25W, 32W	Housing colour	White/Black/Grey
Beam angle	15°, 30°, 45°/ 32W 12°, 30°, 45°, 55°	Wiring	Track connector 2 wires/3wires/4 wires
CRI	90/92/95/97	Dimmable	DALI/0-10V/Triac Dim/2.4G RF
CCT	3000K/4000K	Working life	50000 Hrs
Luminous efficacy	1250lm / 1650lm / 1920lm	Led chip	Osram
Input Voltage	AC200-240V 50/60Hz	Driver	Powergear, Osram
Output Voltage	-	Installation	Adapter on track or Surface Mounted

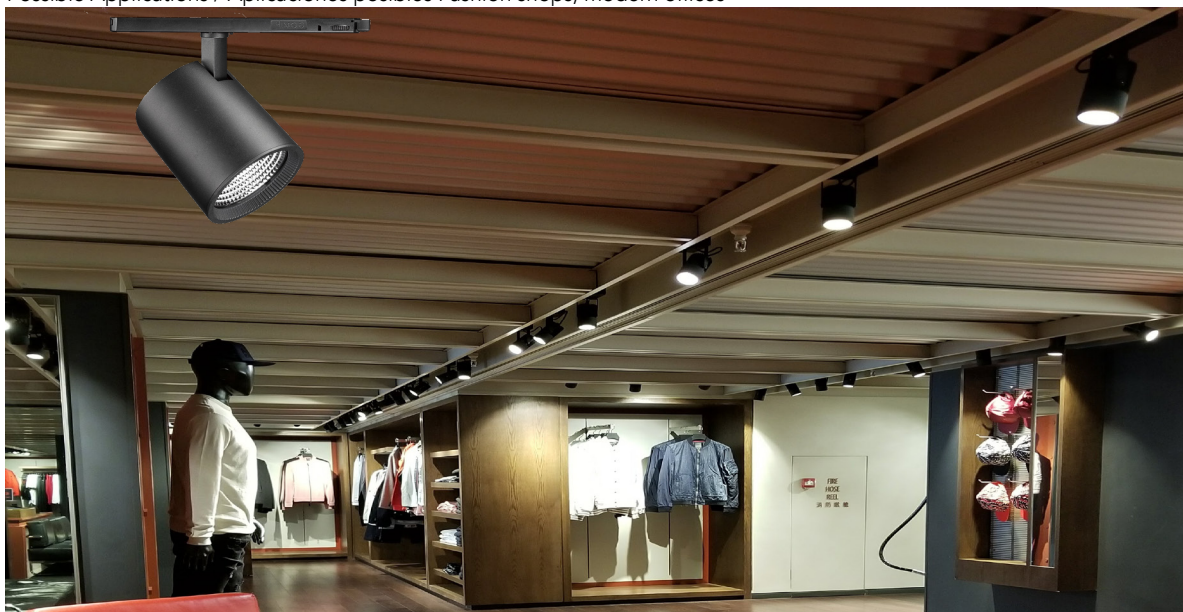
Possible Applications / Aplicaciones posibles Fashion shops, modern offices

nelux (HK) international,ltd

PEQUE SERIES

6W

PEQUE - TS5992

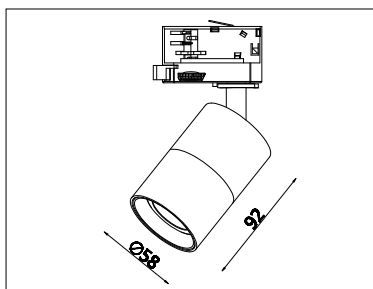**Main Data**

Aluminium die-casting , electrostatic powder coating
 Led Lens PC
 Input Voltage 220-240V AC 50-60Hz and Multi-voltage
 Color:White /Black /Grey
 Power/Voltage 6W
 Beam angle: 24°, 36°
 LED Kangrong
 CCT 3000K, 4000K as standard other CCT available
 CRI80, and CRI90,92, 97 under demand
 Driver Integrated Powegear, OSRAM , ...
 Warranty :5 years

Technical Data / Datos técnicos

Model	PEQUE TS5992	Working temperature	-20°C +45°C
Light source	Led	Material	Aluminum die-casting
Power	6W	Housing colour	White/Black
Beam angle	24°/36°	Wiring	2 wires/3wires/4 wires
CRI	> 80 as standard and 90/92/95/97 as option	Dimmable	On-Off/0-10V
CCT	3000K/4000K	Working life	50000 Hrs
Luminous efficacy	~550lm	Led chip	Kang rong
Input Voltage	AC220-240V 50/60Hz and multivoltage	Driver	/Osram/Khun/Powergear
Output Voltage	-	Installation	Adapter on track
Binning initial	-	Warranty	5 Years

Description / Descripción

The main characteristic feature of PEQUE product is its avant-gard design. Integrated driver with a sophisticated thermal management ensuring a long service life. Innovative photometrics , easy adjustment, and good performance are convincing arguments for using in museums, galleries , salesrooms, showrooms. PEQUE is ideal for general lighting in rooms with low ceilings as well as for intensive illumination of walls. It is a wonderful track spot light for creative lighting concepts with a really efficient visual comfort.


Possible Applications / Aplicaciones posibles Fashion shops, modern offices, hotels,...




nelux (HK) international,ltd

KONIK SERIES


KONIK - TS88110



KONIK - TS100130



KONIK - TS113150

**Description**

Aluminium die-casting , electrostatic powder coating . Reflector Aluminum anodized specular silver
 Input Voltage 220-240V AC 50-60Hz and Multi-voltage
 Color:White /Black /Grey
 Power/Voltage 20W, 28W, 35W, 42W
 Beam angle:15°, 30°, 45° - and 35W/42W 12°, 30°, 45°, 55°
 LED CREE, Philips, Citizen
 CCT 3000K, 4000K as standard other CCT available
 CRI80, and CRI90,92, 97 under demand
 Driver Gear box, OSRAM , Tridonic , Philips, Khun
 Warranty :5 years

Technical Data / Datos técnicos

Model	KONIK series	Working temperature	-20°C +45°C
Light source	COB	Material	Aluminum die-casting
Power	20W, 28W, 35W, 42W	Housing colour	White/Black
Beam angle	15°, 30°, 45° and 35W/42W 12°, 30°, 45°, 55°	Wiring	Track connector 2 wires/3wires/4 wires
CRI	CRI>80 and 90/92/95/97 as an option	Dimmable	DALI/0-10V/Triac Dim/2.4G RF
CCT	3000K/4000K	Working life	50000 Hrs
Luminous efficacy	~16600lm/ 2700lm /35000lm/4000lm	Led chip	Cree / Philips
Input Voltage	AC200-240V 50/60Hz and Multi-voltage	Driver	OSRAM , Tridonic , Philips, Khun
Output Voltage	-	Installation	Adapter on track
Binning initial	-	Warranty	5 Years

Possible Applications / Aplicaciones posibles Fashion shops, modern offices



nelux (HK) international,ltd

TUBE SERIES

TUBE - TS58130 10W







TUBE - TS66135 14W



TUBE - TS73155 20W



TUBE - TS80170 24W

**Description**

Aluminium die-casting . electrostatic powder coating . Reflector Led Lens . Mounting Ring Aluminum Anodizing Coating
 Input Voltage 220-240V AC 50-60Hz and Multi-voltage
 Color: White /Black /Grey
 Power/Voltage 10W, 14W, 20W, 24W
 Beam angle: 10W/ 20°, 24°, 36° - and - 14W/20W/24W 42W 15°, 24°, 36°
 LED CREE, Philips
 CCT 3000K, 4000K as standard other CCT available
 CRI80, and CRI90,92, 97 under demand
 Driver Integrated Tridonic
 Warranty :5 years

Technical Data / Datos técnicos

Model	TUBE series	Working temperature	-20°C +45°C
Light source	COB	Material	Aluminum die-casting
Power	10W, 14W, 20W, 24W	Housing colour	White/Black/Grey
Beam angle	15°, 30°, 45° and 35W/42W 12°, 30°, 45°, 55°	Wiring	Track connector 2 wires/3wires/4 wires
CRI	CRI>80 and 90/92/95/97 as an option	Dimmable	DALI/0-10V/Triac Dim/2.4G RF
CCT	3000K/4000K	Working life	50000 Hrs
Luminous efficacy	~950lm/ ~1310lm / ~2000lm/ ~2300lm	Led chip	Cree / Philips
Input Voltage	AC200-240V 50/60Hz and Multi-voltage	Driver	Tridonic, Khun
Output Voltage	-	Installation	Adapter on track
Binning initial	-	Warranty	5 Years

Possible Applications / Aplicaciones posibles Fashion shops, modern offices



nelux (HK) international,ltd

Thank you for checking our track spot light catalog 2022

More products

www.nelux.com.hk
www.valentiae.com
www.solucionled.com

Contact us

sales@nelux.com.hk
whatsapp +852 5349 0724
wechat neluxury
skype neluxlightng
Head Office +852 28600042