

nelux

Producing your dreams

Comercial & Architectural LED lighting
Since 2010

Nelux Architectural Lighting Products

INLINE LINEAR SPOT LIGHT

Scan Our QR



Producing Your Dreams

Nelux (HK) Internation,ltd

nelux architectural lighting

18 Harbour road, Central Plaza, 32/F, Office 3208,
Wanchai, HK, China
sales@nelux.com.hk
+852 53490724

neluxury
neluxlighting
www.nelux.com.hk

NELUX (HK) INTERNATIONAL,LTD



NELUX ARCHITECTURAL LIGHTING architectural lighting products

Nelux: Illuminating Excellence for Over Three Decades

With over 32 years of combined experience, Nelux has been at the forefront of the lighting industry, specializing in fixtures for diverse lighting projects. Our journey began with the same enthusiasm and dedication that drives us today. We aim to leverage our extensive expertise to contribute meaningfully to the knowledge and development of lighting solutions, catering specifically to lighting designers, architects, interior designers, and decorators.

Since the establishment of our head office in Hong Kong in 2010, Nelux has developed three primary product lines:

1. **Architectural Lighting Products:** Products to enhance the aesthetic and functional aspects of architectural spaces.
2. **Industrial Lighting:** High quality and Engineered to meet the rigorous demands of industrial environments.
3. **Bespoke Lighting Products:** Custom-designed lighting solutions that include mold management, product design, and the manufacturing of special and unique products in direct collaboration with our suppliers and customers.

Our Expertise

At Nelux, we excel in professional mold product management and oversee the entire production process, specializing in die casting parts, CNC precision machining parts, and custom fabrication parts. Our commitment to quality is unwavering; we conduct thorough inspections and quality control throughout the entire production process.

Our Strength


Our professional team, combined with the most advanced knowledge in lighting, empowers us to provide high-quality products with exceptional precision. We pride ourselves on our ability to deliver the best solutions tailored to your needs.

Custom Solutions

We offer competitive quotes based on your drawings (preferred formats: STEP, DWG, and PDF) within 49 hours. Our goal is to provide you with unparalleled service and products that meet your exact specifications.

INLINE Linear Spot Light


Exclusive design, Die casting aluminum frame and aluminum profile heatsink.
TOP 1 hot selling series 1 head, 2 heads, 3 heads, 4 heads, 5 heads and 10 heads.
3 kinds of structure: Fixed, Adjustable and Trimless.




10 LED




5 LED

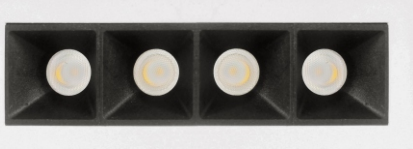


4 LED



3 LED




2 LED



1 LED




Trimless

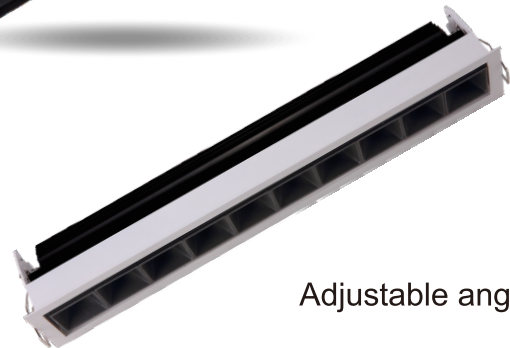

Adjustable angle



INLINE Linear Spot Light

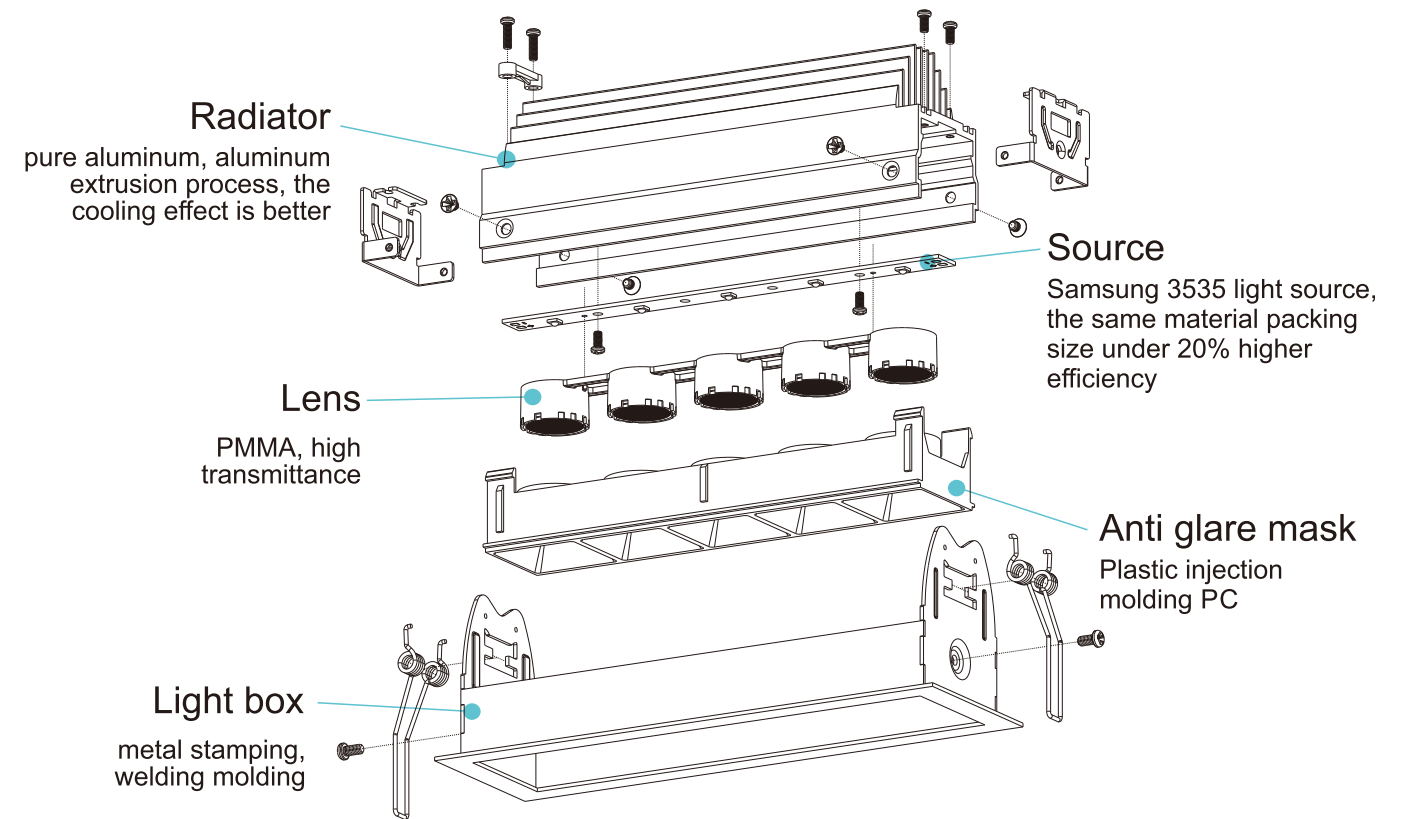







NR1158

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
3W	2700K	Samsung 3535	≥90	15°	134.9lm
	3000K			30°	134.9lm
	4000K			50°	136.0lm

Size/CTN: 395×315×300 mm
G.W./CTN: 10.17 kgs
PCS/CTN: 60 pcs

Light distribution parameters







NR1159

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
2×3W	2700K	Samsung 3535	≥90	15°	303.2lm
	3000K			30°	304.1lm
	4000K			50°	304.4lm

Size/CTN: 540×435×300 mm
G.W./CTN: 13.56 kgs
PCS/CTN: 60 pcs

Light distribution parameters







NR1160

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
3×3W	2700K	Samsung 3535	≥90	15°	518.2lm
	3000K			30°	520.4lm
	4000K			50°	508.1lm

Size/CTN: 555×435×300 mm
G.W./CTN: 20.34 kgs
PCS/CTN: 48 pcs

Light distribution parameters

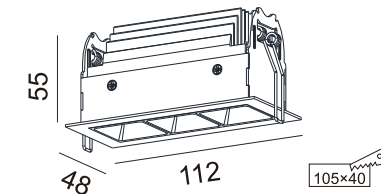





NR1161

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
4×3W	2700K	Samsung 3535	≥90	15°	687.1lm
	3000K			30°	688.5lm
	4000K			50°	688.2lm

Size/CTN: 480×315×300 mm
G.W./CTN: 20.34 kgs
PCS/CTN: 45 pcs

Light distribution parameters

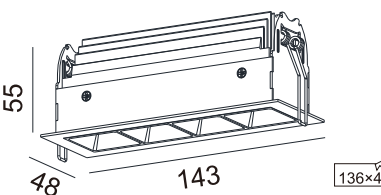





NR1156

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
5×3W	2700K	Samsung 3535	≥90	15°	903.5lm
	3000K			30°	901.1lm
	4000K			50°	896.6lm

Size/CTN: 395×315×300 mm
G.W./CTN: 16.84 kgs
PCS/CTN: 30 pcs

Light distribution parameters

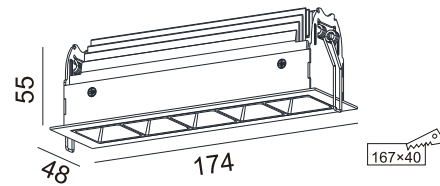
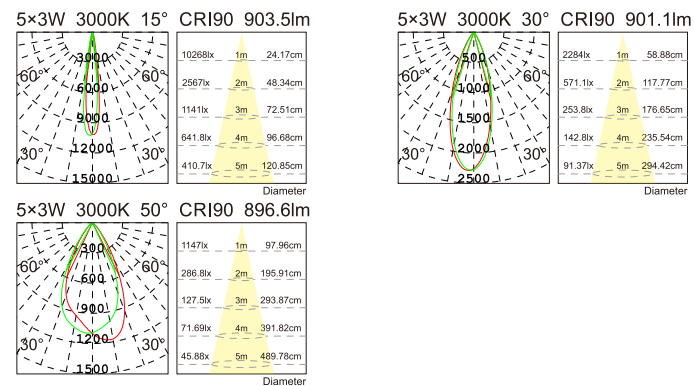


NR1211

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
3W	2700K	Samsung 3535	≥90	15°	134.9lm
	3000K			30°	133.1lm
	4000K			50°	136.0lm

Size/CTN: 395×315×300 mm
G.W./CTN: 10.17 kgs
PCS/CTN: 60 pcs

Light distribution parameters


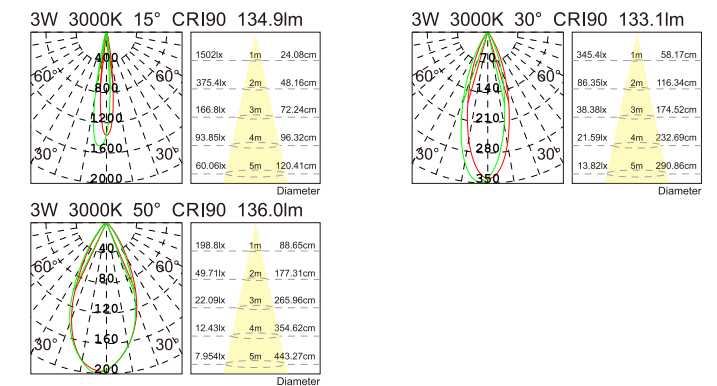


NR1157

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
10×3W	2700K	Samsung 3535	≥90	15°	1928.8lm
	3000K			30°	1908.3lm
	4000K			50°	1909.2lm

Size/CTN: 390×365×315 mm
G.W./CTN: 16.84 kgs
PCS/CTN: 15 pcs

Light distribution parameters

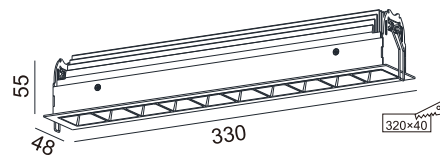
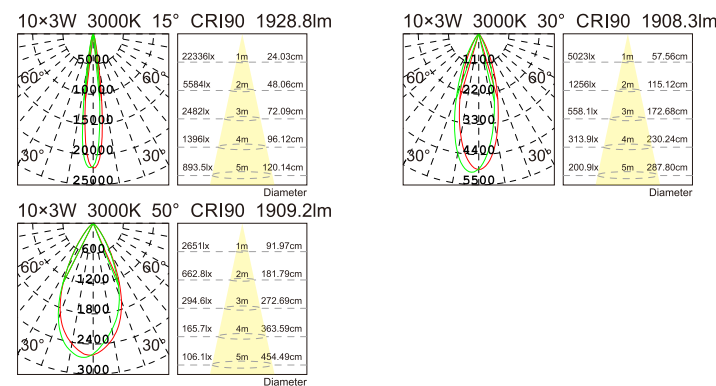


NR1212

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
2×3W	2700K	Samsung 3535	≥90	15°	303.2lm
	3000K			30°	304.1lm
	4000K			50°	304.4lm

Size/CTN: 540×435×300 mm
G.W./CTN: 13.56 kgs
PCS/CTN: 60 pcs

Light distribution parameters

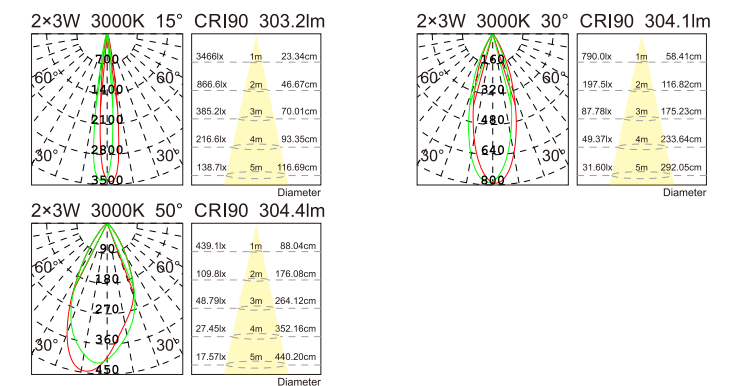





NR1213

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
3×3W	2700K	Samsung 3535	≥90	15°	518.2lm
	3000K			30°	514.3lm
	4000K			50°	508.1lm

Size/CTN: 515×315×300 mm
G.W./CTN: 20.34 kgs
PCS/CTN: 60 pcs

Light distribution parameters

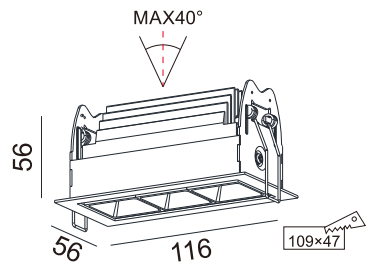
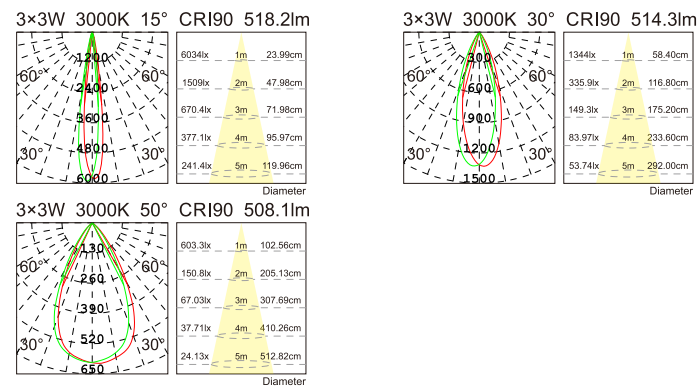


NR1214

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
4×3W	2700K	Samsung 3535	≥90	15°	687.1lm
	3000K			30°	688.5lm
	4000K			50°	688.2lm

Size/CTN: 480×315×300 mm
G.W./CTN: 20.34 kgs
PCS/CTN: 45 pcs

Light distribution parameters

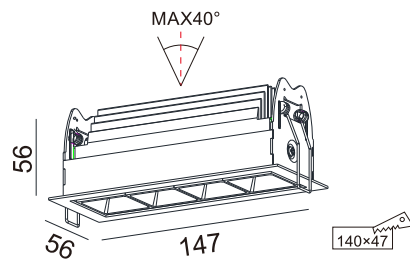
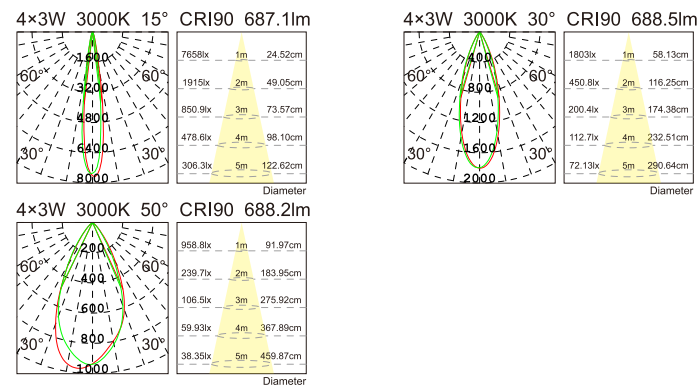


NR1209

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
5×3W	2700K	Samsung 3535	≥90	15°	903.5lm
	3000K			30°	901.1lm
	4000K			50°	896.6lm

Size/CTN: 540×410×300 mm
G.W./CTN: 16.84 kgs
PCS/CTN: 30 pcs

Light distribution parameters

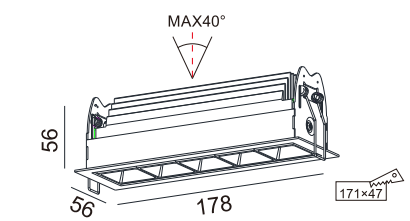
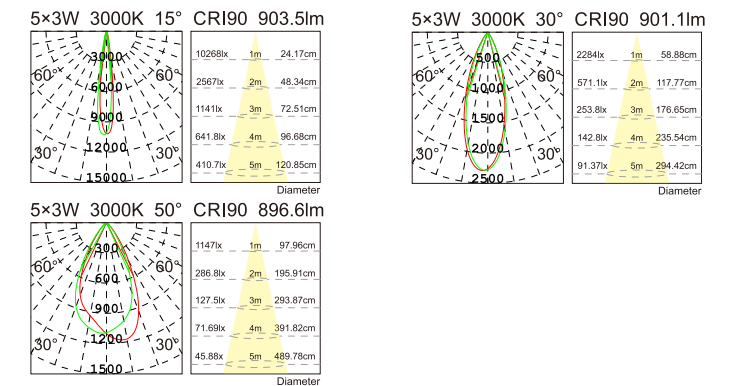


NR1210

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
10×3W	2700K	Samsung 3535	≥90	15°	1928.8lm
	3000K			30°	1908.3lm
	4000K			50°	1909.2lm

Size/CTN: 540×375×300 mm
G.W./CTN: 16.84 kgs
PCS/CTN: 15 pcs

Light distribution parameters

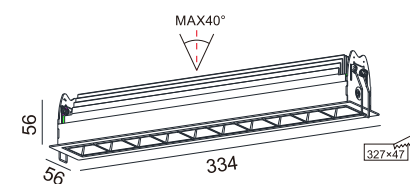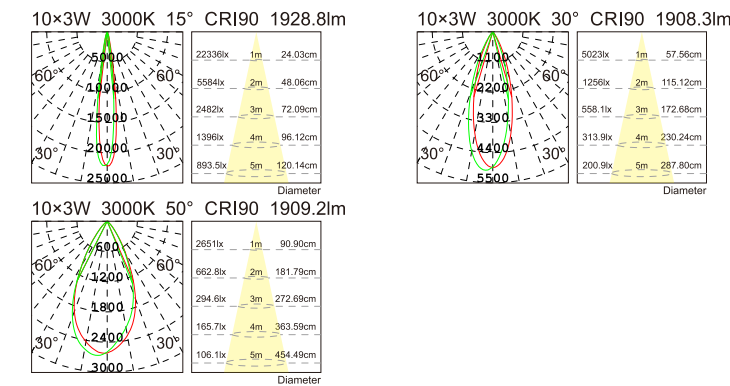







NR1219

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
3W	2700K	Samsung 3535	≥90	15°	134.9lm
	3000K			30°	133.1lm
	4000K			50°	136.0lm

Size/CTN: 540×435×300 mm
G.W./CTN: 10.17 kgs
PCS/CTN: 60 pcs

Light distribution parameters







NR1220

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
2×3W	2700K	Samsung 3535	≥90	15°	303.2lm
	3000K			30°	304.1lm
	4000K			50°	304.4lm

Size/CTN: 395×315×300 mm
G.W./CTN: 13.56 kgs
PCS/CTN: 60 pcs

Light distribution parameters







NR1221

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
3×3W	2700K	Samsung 3535	≥90	15°	518.2lm
	3000K			30°	514.3lm
	4000K			50°	508.1lm

Size/CTN: 555×435×300 mm
G.W./CTN: 20.34 kgs
PCS/CTN: 48 pcs

Light distribution parameters

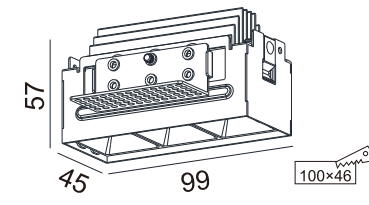





NR1222

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
4×3W	2700K	Samsung 3535	≥90	15°	687.1lm
	3000K			30°	688.5lm
	4000K			50°	688.2lm

Size/CTN: 510×435×300 mm
G.W./CTN: 20.34 kgs
PCS/CTN: 36 pcs

Light distribution parameters

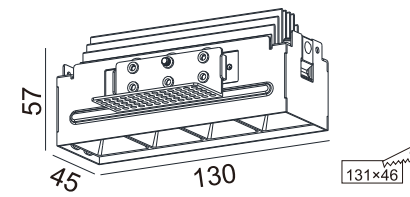







NR1207

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
5×3W	2700K	Samsung 3535	≥90	15°	903.5lm
	3000K			30°	901.1lm
	4000K			50°	896.6lm

Size/CTN: 540×410×300 mm
G.W./CTN: 16.84 kgs
PCS/CTN: 30 pcs

Light distribution parameters

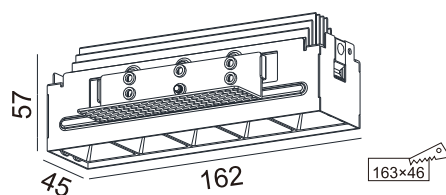

NR1208

Power	CCT	Optical Source	CRI	Beam angle	Luminous flux
10×3W	2700K	Samsung 3535	≥90	15°	1928.8lm
	3000K			30°	1908.3lm
	4000K			50°	1909.2lm

Size/CTN: 540×375×300 mm
G.W./CTN: 16.84 kgs
PCS/CTN: 15 pcs

Light distribution parameters

