

COLLECTION 2018-2022

nelux hong kong international, ltd



CEILING RECESSED



ARCHITECTURAL LIGHTING

Our CEILING RECESSED are made from Aluminium Die-casting, electrostatic powder coating, and aluminum Reflectors made from Aluminium anodized specular silver. Brand of Chip CREE and other brands like Citizen, Samsung, Bridgelux available, Led Driver Khün, Xz, Osram, Philips.

Input Voltage Multivoltage and 220-240VAC/50-60Hz



CR63235 16W
CR76265 25W
CR90295 32W



CR85160 16W



CR85100 11W



CR135105 11W



CR85100SMT 6W




CR135105SMT 16W



CEILING RECEESED, PILL Series,
reference CR85100 11W finished
white color

CR63235

Input Voltage AC220-240V, Multivoltage
 Light Power 16W
 Luminous flux ~1140lm
 Light Source CREE COB
 CCT 2700K, 3000K, 4000K, 5000K
 CRI 80 as standard, CRI90, CRI97
 Beam Angle 20°, 30°, 40°
 Output DC36V 450mA


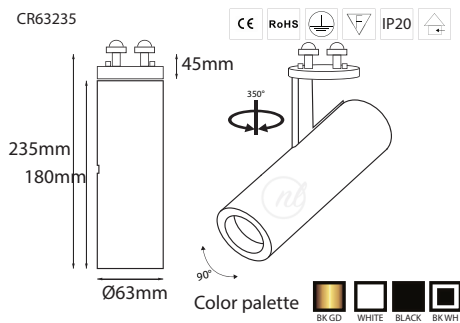


CR90295

Input Voltage AC220-240V, Multivoltage
 Light Power 32W
 Luminous flux ~2200lm
 Light Source CREE COB
 CCT 2700K, 3000K, 4000K, 5000K
 CRI 80 as standard, CRI90, CRI97
 Beam Angle 20°, 30°, 40°
 Output DC36V 900mA

CR76265

Input Voltage AC220-240V, Multivoltage
 Light Power 25W
 Luminous flux ~1800lm
 Light Source CREE COB
 CCT 2700K, 3000K, 4000K, 5000K
 CRI 80 as standard, CRI90, CRI97
 Beam Angle 20°, 30°
 Output DC36V 700mA

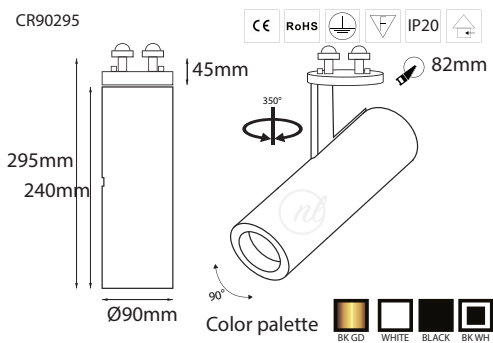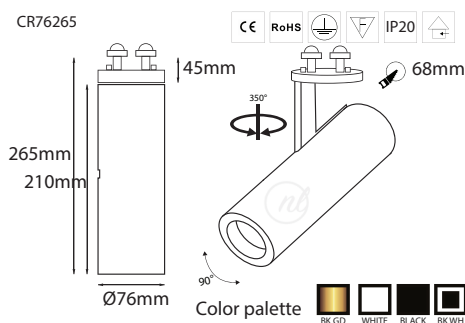


CANY SERIES

CR85160

Input Voltage AC220-240V, Multivoltage
 Light Power 16W
 Luminous flux ~1140lm
 Light Source CREE COB
 CCT 2700K, 3000K, 4000K, 5000K
 CRI 80 as standard, CRI90, CRI97
 Beam Angle 20°, 30°, 40°
 Output DC36V 450mA



CR85160

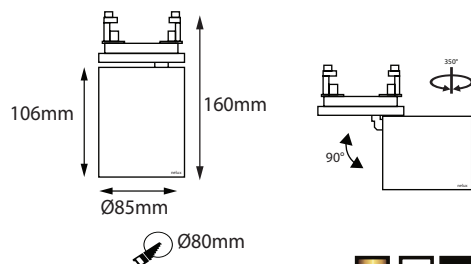

Color palette




CR85100

Input Voltage AC220-240V, Multivoltage
 Light Power 11W
 Luminous flux ~840lm
 Light Source CREE COB
 CCT 2700K, 3000K, 4000K, 5000K
 CRI 80 as standard, CRI90, CRI97
 Beam Angle 18°, 24°, 40°
 Output DC36V 300mA


CR135105

Input Voltage AC220-240V, Multivoltage
 Light Power 11W
 Luminous flux ~840lm
 Light Source CREE COB
 CCT 2700K, 3000K, 4000K, 5000K
 CRI 80 as standard, CRI90, CRI97
 Beam Angle 18°, 24°, 40°
 Output DC36V 300mA


CR85100

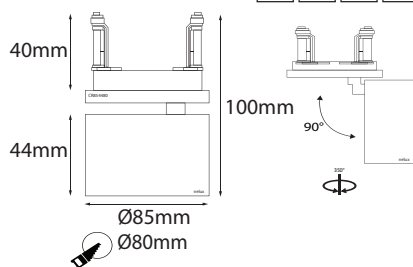

Color palette

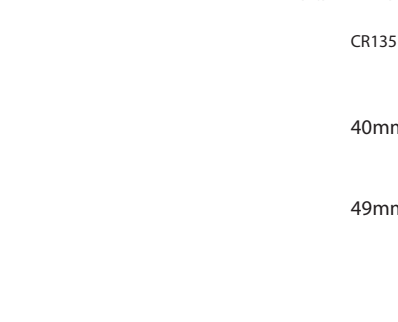

CR135105

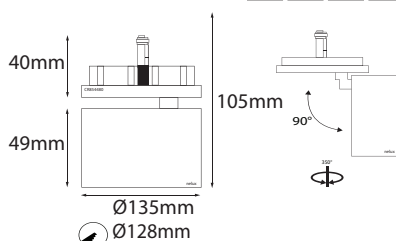

Color palette




PILL SERIES



CR85100SMT

Input Voltage AC220-240V, Multivoltage
 Light Power 6W
 Luminous flux ~560lm
 Light Source Edison SMT
 CCT 2700K, 3000K, 4000K, 5000K
 CRI 80 as standard
 Beam Angle 90°
 Output DC21V 300mA

CR85100SMT

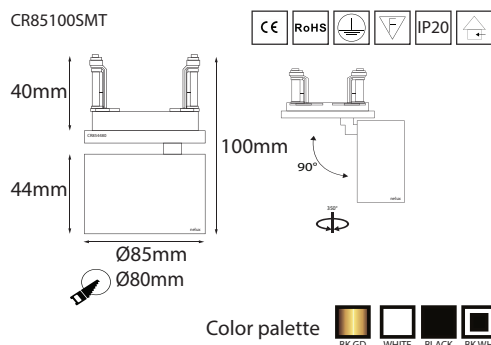

CR135105SMT

Input Voltage AC220-240V, Multivoltage
 Light Power 16W
 Luminous flux ~1500lm
 Light Source Edison SMT
 CCT 2700K, 3000K, 4000K, 5000K
 CRI 80 as standard
 Beam Angle 90°
 Output DC36V 450mA

CR135105SMT

