



C9585

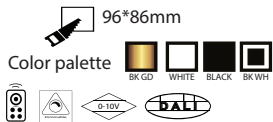

C9585TL TRIM-LESS

Input Voltage AC220-240V, Multivoltage
 Light Power 1*10W
 Luminous flux Lens ~890lm, Reflector ~830lm
 Light Source CREE, other options available
 CCT 2700K, 3000K, 4000K
 CRI 80 as standard, CRI90, 95, 97
 Beam Angle LENS 24°, 36°, 60° Reflector 15°, 24°, 38°, 60°
 Driver, Khun, Xz other options available
 Dimmable 0-10V, Triac, Dali as an option




C18585TL TRIM-LESS



Input Voltage AC220-240V, Multivoltage
 Light Power 2*10W
 Luminous flux Lens ~1630lm, Reflector ~1570lm
 Light Source CREE, other options available
 CCT 2700K, 3000K, 4000K
 CRI 80 as standard, CRI90, 95, 97
 Beam Angle LENS 24°, 36°, 60° Reflector 15°, 24°, 38°, 60°
 Driver, Khun, Xz other options available
 Dimmable 0-10V, Triac, Dali as an option



C18585

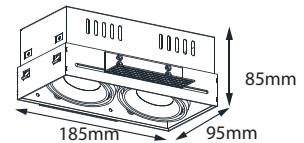

C27585

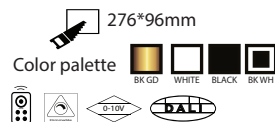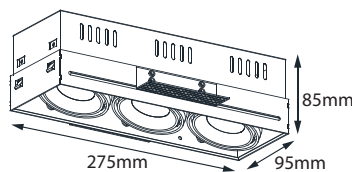

C27585TL TRIM-LESS

Input Voltage AC220-240V, Multivoltage
 Light Power 3*10W
 Luminous flux Lens ~2480lm, Reflector ~2250lm
 Light Source CREE, other options available
 CCT 2700K, 3000K, 4000K
 CRI 80 as standard, CRI90, 95, 97
 Beam Angle LENS 24°, 36°, 60° Reflector 15°, 24°, 38°, 60°
 Driver, Khun, Xz other options available
 Dimmable 0-10V, Triac, Dali as an option

RETAIL 10 TRIM-LESS SERIES

