



SS2839



GENERAL DATA

Power	3W and 1W as an option
Led type	1pcs 3W CREE XPE
Lumens	90~100lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	>80
Beam angle	15°, 25°, 38°, 45°, 60°
Dimension	Ø28*H39mm
Cut out	-
Net weight	0.097kg
Warranty	3 years


MAIN DATA

IP rating	IP67
IK rating	IK04
Housing material	Aluminium CNC machined
Protection finishing	20~25µm thickness anodized film for housing
Trim	Aluminium
Glass	Tempered Glass T=4mm
Loading capacity	220 kgs
Cable gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	PVC spike as standard, and round base for wall mounting as an option

ELECTRICAL DATA

Input voltage	DC12V/DC24V
Insulation class	Class III
Cable	1 PVC cable 1.5M H05RN-F 2x0.75mm square
Driver	Low voltage constant current output, excluding the transformer

SS2839

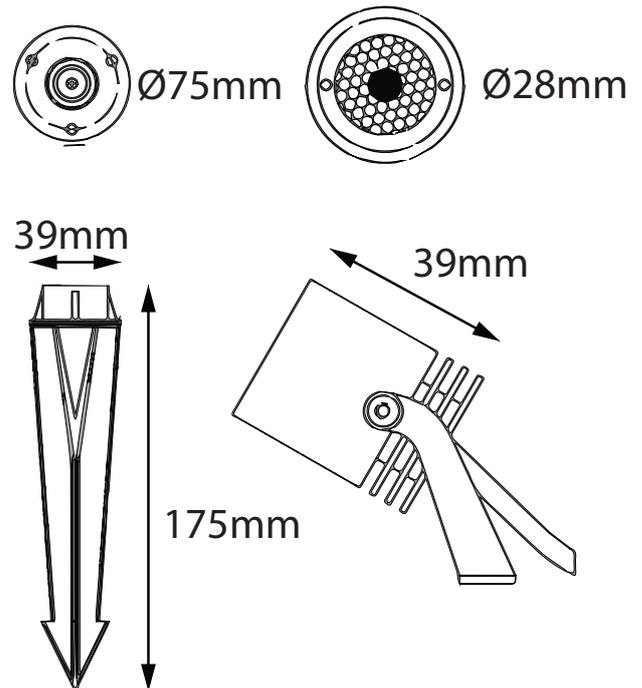



SS4277



GENERAL DATA

Power	5W
Led type	1 pcs 5W COB LED
Lumens	350~400lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	>80
Beam angle	15°, 25°
Dimension	Ø42*H77mm
Cut out	-
Net weight	0.29kg
Warranty	3 years


MAIN DATA

IP rating	IP67
IK rating	IK04
Housing material	Aluminium CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey standard, silver color as an option.
Trim	Aluminium
Glass	Tempered Glass T=3mm
Loading capacity	220 kgs
Cable gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	PVC spike as standard, and round base for wall mounting as an option

ELECTRICAL DATA

Input voltage AC95-265V and DC12V/DC24V as an option
 Insulation class Class I
 Cable 1 PC rubber cable 1.5M H05RN-F 3x0.75mm square
 Driver Built-in high voltage constant current driver with transformer

SS4277

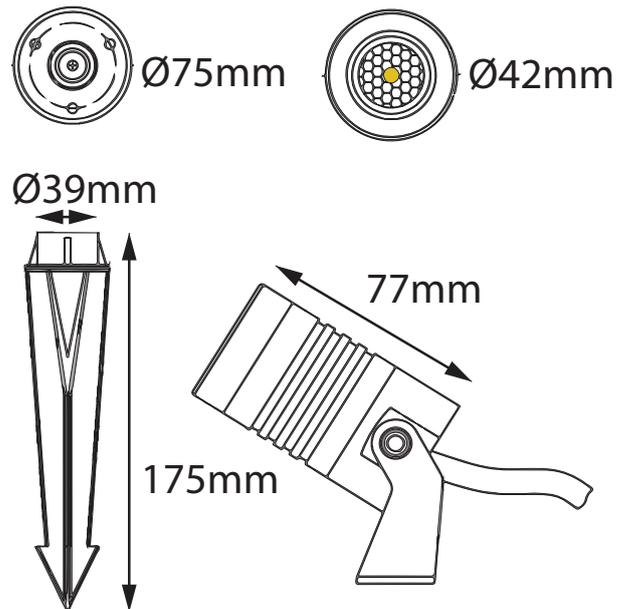

SPIKE SPOT LIGHT SERIES



SS4490



GENERAL DATA

Power	8W
Led type	1pcs 8W COB LED
Lumens	560~640lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	>80
Beam angle	5°, 25°
Dimension	Ø44*H90mm
Cut out	-
Net weight	0.39kg
Warranty	3 years


MAIN DATA

IP rating	IP67
IK rating	IK04
Housing material	Aluminium CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey standard, silver color as an option.
Trim	Aluminium
Glass	Tempered Glass T=3mm
Loading capacity	220 kgs
Cable gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	PVC spike as standard, and round base for wall mounting as an option

ELECTRICAL DATA

Input voltage AC95-265V and DC12V/DC24V as an option
 Insulation class Class I
 Cable 1 PC rubber cable 1.5M H05RN-F 3x0.75mm square
 Driver Built-in high voltage constant current driver with transformer

SS4490

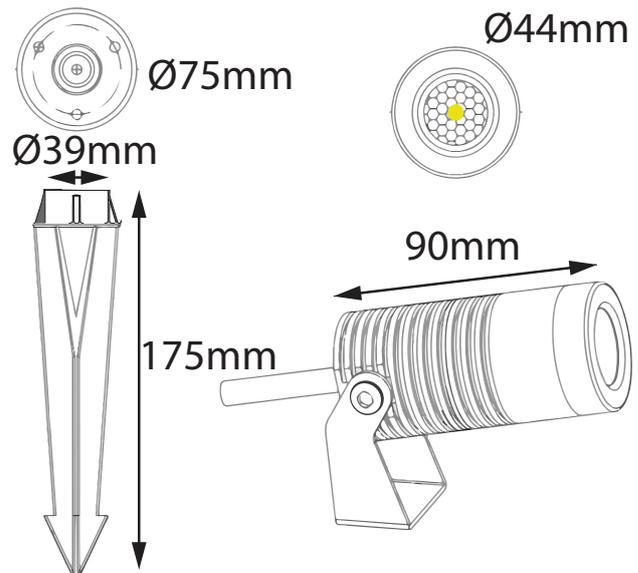

SPIKE SPOT LIGHT SERIES

lighting product designers and mold management





SS61100



GENERAL DATA

Power	15W
Led type	1pcs 15W COB LED
Lumens	1200~1350lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	>80
Beam angle	25°, 38°, 60°
Dimension	Ø61*H100mm
Cut out	-
Net weight	0.58kg
Warranty	3 years


MAIN DATA

IP rating	IP67
IK rating	IK04
Housing material	Aluminium CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey standard, silver color as an option.
Trim	Aluminium
Glass	Tempered Glass T=3mm
Loading capacity	220 kgs
Cable gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	PVC spike as standard, and round base for wall mounting as an option

ELECTRICAL DATA

Input voltage	AC95-265V
Insulation class	Class I
Cable	1 PC rubber cable 1.5M H05RN-F 3x0.75mm square
Driver	Built-in high voltage constant current driver with transformer

SS61100

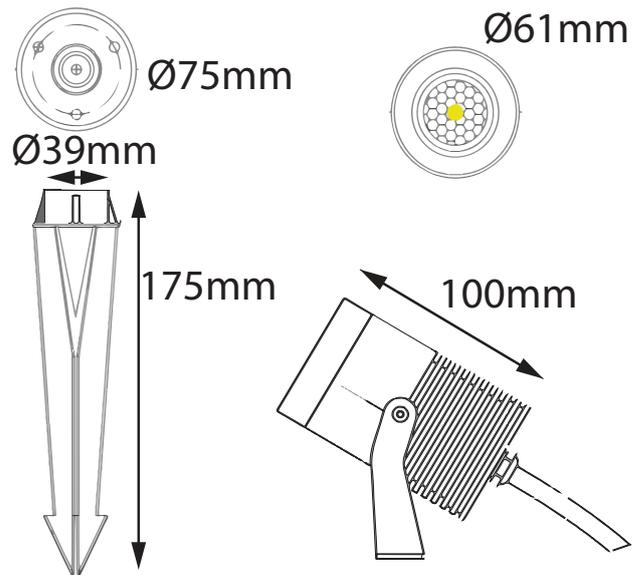

SPIKE SPOT LIGHT SERIES



SS61115



GENERAL DATA

Power	12W
Led type	1pcs 12W CREE XHP35 LED
Lumens	960~1000lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	>80
Beam angle	5°
Dimension	Ø61*H115mm
Cut out	-
Net weight	0.58kg
Warranty	3 years


MAIN DATA

IP rating	IP67
IK rating	IK04
Housing material	Aluminium CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey standard, silver color as an option.
Trim	Aluminium
Glass	Tempered Glass T=3mm
Loading capacity	220 kgs
Cable gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	PVC spike as standard, and round base for wall mounting as an option

ELECTRICAL DATA

Input voltage	AC95-265V
Insulation class	Class I
Cable	1 PC rubber cable 1.5M H05RN-F 3x0.75mm square
Driver	Built-in high voltage constant current driver with transformer

SS61115

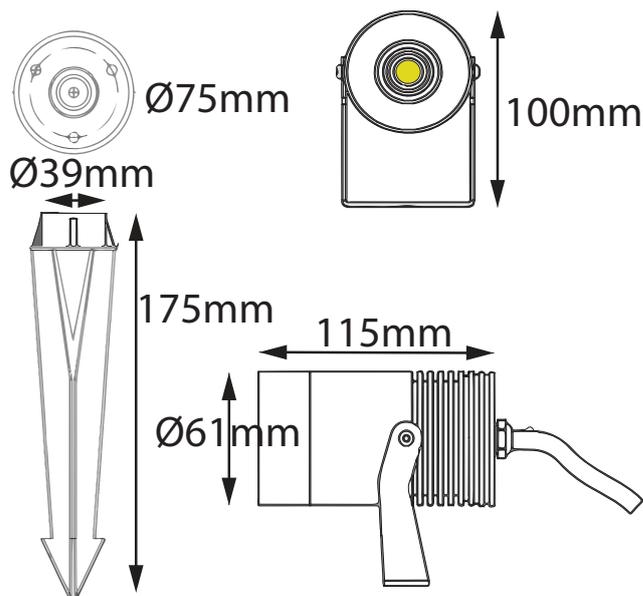



SS61133



GENERAL DATA

Power	12W
Led type	1pcs 12W CREE XHP35 LED
Lumens	960~1000lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	>80
Beam angle	Zoom 10° to 60° adjustable
Dimension	Ø61*H133mm
Cut out	-
Net weight	0.62kg
Warranty	3 years


MAIN DATA

IP rating	IP67
IK rating	IK04
Housing material	Aluminium CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey standard, silver color as an option.
Trim	Aluminium
Glass	Tempered Glass T=3mm
Loading capacity	220 kgs
Cable gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	PVC spike as standard, and round base for wall mounting as an option

ELECTRICAL DATA

Input voltage	AC95-265V
Insulation class	Class I
Cable	1 PC rubber cable 1.5M H05RN-F 3x0.75mm square
Driver	Built-in high voltage constant current driver with transformer

SS61133

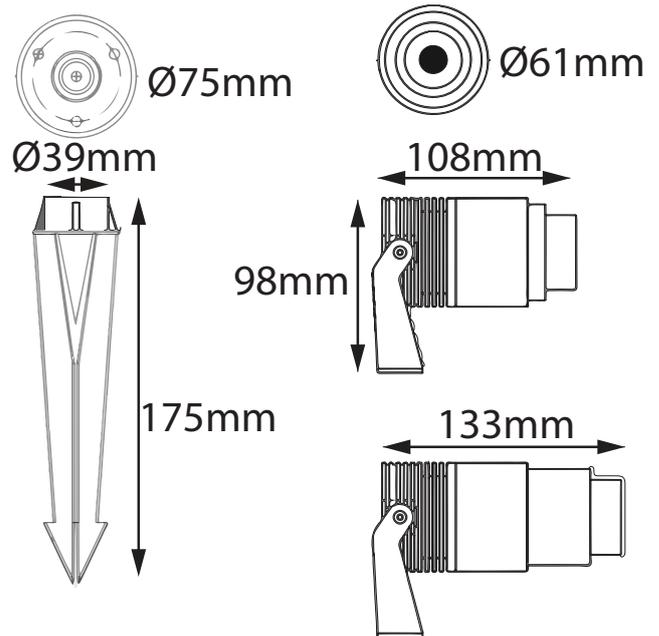

SPIKE SPOT LIGHT SERIES



SS85145



GENERAL DATA

Power	25W
Led type	1pcs 25W COB LED
Lumens	2100~2300lm
CCT	2700K, 3000K, 4000K, 6000K
CRI	>80
Beam angle	24°, 38°, 60°
Dimension	Ø85*H145mm
Cut out	-
Net weight	1.37kg
Warranty	3 years


MAIN DATA

IP rating	IP67
IK rating	IK04
Housing material	Aluminium CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey standard, silver color as an option.
Trim	Aluminium
Glass	Tempered Glass T=4mm
Loading capacity	220 kgs
Cable gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	PVC spike as standard, and round base for wall mounting as an option

ELECTRICAL DATA

Input voltage	AC100-265V as standard DC24V as an option
Insulation class	Class I
Cable	1 PC rubber cable 1.5M H05RN-F 3x0.75mm square
Driver	Built-in high voltage constant current driver with transformer

SS85145

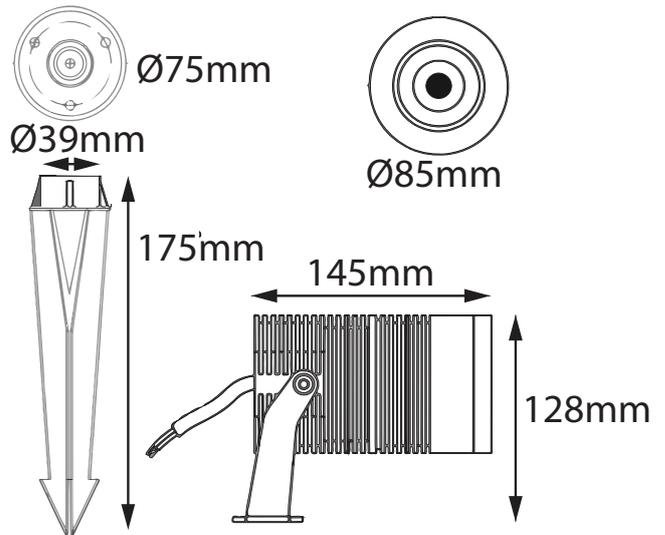

SPIKE SPOT LIGHT SERIES

lighting product designers and mold management





SS4277RGB



GENERAL DATA

Power	9W
Led type	1 pcs 9W RGB COB LED
Lumens	300lm
CCT	RGB
CRI	>70
Beam angle	25°, and 38° as an option
Dimension	Ø42*H77mm
Cut out	-
Net weight	0.38kg
Warranty	3 years


MAIN DATA

IP rating	IP67
IK rating	IK04
Housing material	Aluminium CNC machined
Protection finishing	20~25µm thickness anodized film for housing. Dark grey standard, silver color as an option.
Trim	Aluminium
Glass	Tempered Glass T=3mm
Loading capacity	220 kgs
Cable gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	PVC spike as standard, and round base for wall mounting as an option

ELECTRICAL DATA

Input voltage	DC24V
Insulation class	Class III
Cable	1 PC rubber cable 1.5M H05RN-F 4x0.75mm square
Driver	low voltage constant current output

SS4277RGB

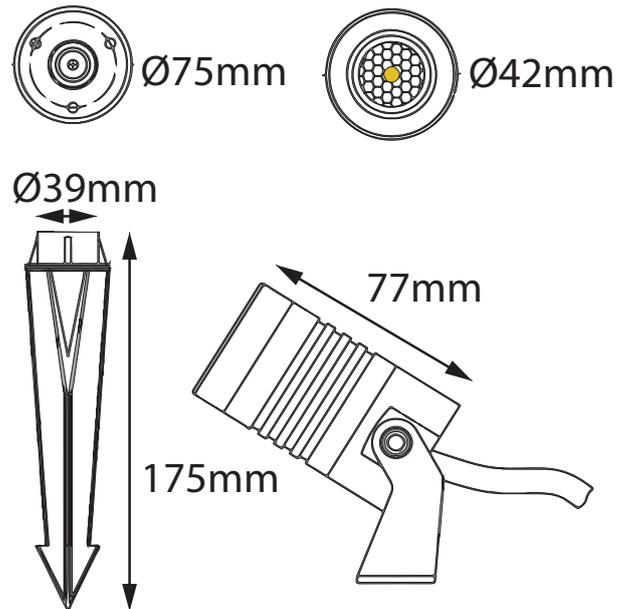

SPIKE SPOT LIGHT SERIES



VINT075 and VINT058




GENERAL DATA

Power	2W to 12W please check module specifications
Led type	CREE Led
Lumens	from 200lm~1000lm check modules
CCT	3000K, 4000K, 5000K
CRI	>70 and >80
Beam angle	15°, 30°, 45°, 60°
Dimension	Ø75*L178/194mm and Ø58*L163/179mm
Cut out	-
Net weight	10kg and 15Kg
Warranty	2 years


MAIN DATA

IP rating	IP65
IK rating	IK01
Housing material	CNC machined
Cable gland	PG7 IP67
Gasket	O-ring PMQ silicone seal
Accessories	PVC spike as standard, and claw base for wall mounting as an option

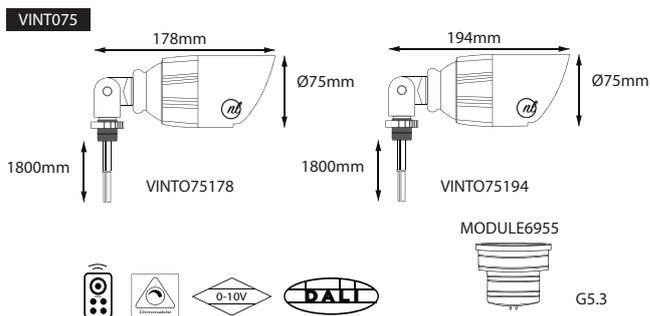

ELECTRICAL DATA

Input voltage	12V AC/DC
Insulation class	Class III
Cable	1 PC rubber cable 1.5M H05RN-F 2x0.75mm square

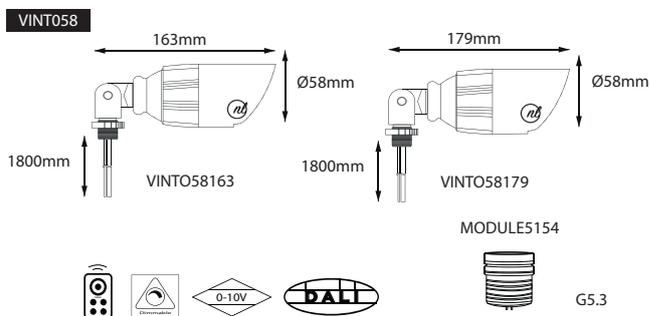

ACCESSORIES

Arrow Brass Spike



Brass Spike



Plastic Spike



Brass Claw



VINTO SERIE MODULES

MODULE 5154




GENERAL DATA

Power	2W, 4W, 6W, 9W
Led type	SMD3535 Led
Lumens	~200lm, ~400lm, ~580lm, ~800lm
CCT	3000K, 4000K, 5000K
CRI	>70 and >80
Beam angle	15°, 30°, 45°, 60°
Dimension	Ø50.6*H54mm
Optional	CREE XBD RGBW
Warranty	2 years

ELECTRICAL DATA

Input voltage 12V AC/DC
 Insulation class Class III
 Cable 1 PC rubber cable 1.5M H05RN-F 2x0.75mm square

MODULE5154



MODULE 6955



GENERAL DATA

Power	2W, 4W, 6W, 9W, 12W
Led type	SMD3535 Led
Lumens	~200lm, ~400lm, ~580lm, ~800lm, ~950lm
CCT	3000K, 4000K, 5000K
CRI	>70 and >80
Beam angle	15°, 30°, 45°, 60°
Dimension	Ø69*H55mm
Optional	CREE XBD RGBW
Warranty	2 years

ELECTRICAL DATA

Input voltage 12V AC/DC
 Insulation class Class III
 Cable 1 PC rubber cable 1.5M H05RN-F 2x0.75mm square

MODULE 6955

